

POS-4P M12 PG13,5 300 mm**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Various build-in connectors are required for the connections on the device side of the sensor/actuator cabling. These are available in the versions M12, M8 and M5.

General ordering data

Version	Locating plug-in connector, M12, pin, straight, {Reference (AttributeDefinition) not found: A845_1030981}, Number of poles: 4
Order No.	8425910000
Type	POS-4P M12 PG13,5 300 mm
GTIN (EAN)	4008190996826
Qty.	1 pc(s).

Creation date March 29, 2021 10:49:47 PM CEST

POS-4P M12 PG13,5 300 mm

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 76 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical data customisable plug-in connectors

Cable glands	PG 13.5	Contact surface	CuZnAu
Housing main material	CuZn, nickel-plated	Number of poles	4
Protection degree	IP67	Rated current	4 A
Rated voltage	250 V	Temperature range of housing	-40 ... +85 °C

General data

Cable glands	PG 13.5	Cable length	0.3 m
Conductor O.D.	-	Connection thread	M12
Contact surface	CuZnAu	Core cross-section	1.5 mm ²
Fire behaviour	V2	Housing main material	CuZn, nickel-plated
Material	Cu Zn	Number of poles	4
Protection degree	IP67	Rated current	4 A
Rated voltage	250 V	Sheath material	Nickel-plated CuZn
Sheathing colour	silver	Temperature range of housing	-40 ... +85 °C

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

Approvals

Approvals



ROHS Conform

Downloads



Engineering Data [STEP](#)

POS-4P M12 PG13,5 300 mm

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

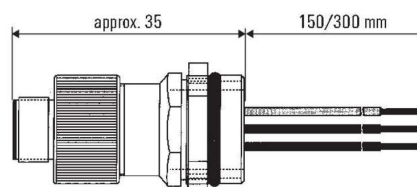

Pole scheme