

WAVEFILTER 10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Simple radio noise suppression in the cabinet thanks to WAVEFILTER**

The WAVEFILTER series eliminates the need for time-consuming bolting processes of mains filters. The filters are snapped onto TS 35 and connected to the device whose noise is to be suppressed. The two-stage, 22.5 mm wide WAVEFILTER, in 1 A, 3 A, 6 A and 10 A versions, offers high attenuation at all voltage levels from 5 V, 12 V, 24 V, 48 V, 60 V, 120 V up to 250 V.

General ordering data

Version	WAVESERIES, Surge protection, Surge protection, Attenuation at 100 MHz: 40 dB
Order No.	8614770000
Type	WAVEFILTER 10A
GTIN (EAN)	4032248277032
Qty.	1 pc(s).

WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	73.4 mm	Depth (inches)	2.89 inch
Height	73.4 mm	Height (inches)	2.89 inch
Net weight	142.12 g	Width	22.5 mm
Width (inches)	0.886 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Operating temperature	-20 °C...40 °C
---------------------	----------------	-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (cURus)	E64388
-------------------------	--------

General data

Colour	beige	Design	Wave 22.5 L
Height with TS 35	112.4 mm	Protection degree	IP20
Rail	TS 35	Segment	Power distribution
Version	Surge protection		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Attenuation at 0.15 MHz	< 0.5 dB	Attenuation at 1 MHz	70 dB
Attenuation at 10 MHz	52 dB	Attenuation at 100 MHz	40 dB
Capacitance	C _x : 470 nF / C _{and} : 4.7 nF	Fuse	10A
Inductance L and L1	0.8 mH	Leakage current at U _n	190 µA
Rated current I _N	10 A	Rated voltage (AC)	250 V
Rated voltage (DC)	250 V	Test voltage P-N	1700 V DC
Test voltage P/N-PE	2000 V AC	Voltage type	AC/DC

Connection data

Cross-section	2.5 mm ²	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²

Classifications

ETIM 6.0	EC002623	ETIM 7.0	EC002623
ECLASS 9.0	27-18-28-14	ECLASS 9.1	27-42-02-08
ECLASS 10.0	27-18-28-14	ECLASS 11.0	27-18-28-14

WAVEFILTER 10A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS Conform

UL File Number Search E64388

DownloadsApproval/Certificate/Document of
Conformity[Declaration of Conformity](#)

Engineering Data

[EPLAN, WSCAD](#)

User Documentation

[Operating instructions](#)


WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol

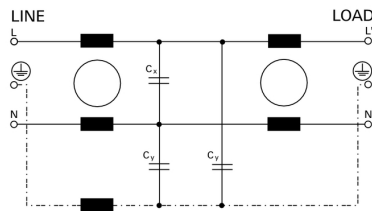

Circuit diagram

