

RIM 2 6/24VDC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****General ordering data**

Version	RIDERSERIES RCL, LED module with freewheel diode, Rated control voltage: 6...24 V DC, Plug-in connection
Order No.	8690950000
Type	RIM 2 6/24VDC
GTIN (EAN)	4032248361632
Qty.	10 pc(s).

Creation date March 29, 2021 11:09:38 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RIM 2 6/24VDC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	34.5 mm	Depth (inches)	1.358 inch
Height	9 mm	Height (inches)	0.354 inch
Net weight	2.788 g	Width	12.5 mm
Width (inches)	0.492 inch		

Temperatures

Storage temperature	-40 °C...70 °C	Operating temperature	-40 °C...70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Control side

Protective circuit	Free-wheeling diode	Rated control voltage	6...24 V DC
Status indicator	red LED		

General data

Colour	black
--------	-------

Connection data

Wire connection method	Plug-in connection
------------------------	--------------------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ECLASS 9.1	27-37-10-10	ECLASS 10.0	27-37-10-10
ECLASS 11.0	27-37-16-92		

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD


RIM 2 6/24VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Wiring diagram

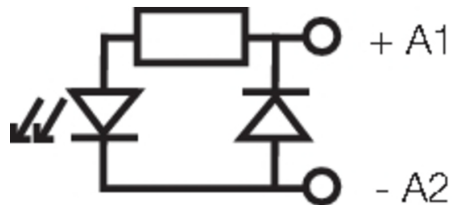

Dimensional drawing

