

RCI374BB0**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Individual relays within the RIDERSERIES RCI

- 1 CO contact
- DC coils
- With integrated status LED, free-wheeling diode and test button

General ordering data

Version	RIDERSERIES RCI, Relay, Number of contacts: 1, CO contact with test button AgNi 90/10, Rated control voltage: 110 V DC, Continuous current: 16 A, Plug-in connection
Order No.	8870270000
Type	RCI374BB0
GTIN (EAN)	4032248613649
Qty.	10 pc(s).

Creation date March 29, 2021 11:30:06 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RCI374BB0

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	26.7 mm	Depth (inches)	1.051 inch
Height	29 mm	Height (inches)	1.142 inch
Net weight	18 g	Width	13 mm
Width (inches)	0.512 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Rated data UL

Certificate No. (cURus)	E224238
-------------------------	---------

Control side

Coil resistance	28800 $\Omega \pm 12\%$	Power rating	803 mW
Protective circuit	Free-wheeling diode	Pull-in/drop-out voltage, typ.	77 V / 11 V DC
Rated control voltage	110 V DC	Rated current DC	7.6 mA
Status indicator	Green LED		

Load side

AC switching capacity (resistive), max.	4000 VA	Continuous current	16 A
DC switching capacity (resistive), max.	384 W @ 24 V	Inrush current	30 A / 4 s
Max. switching frequency at rated load	0.1 Hz	Max. switching voltage, AC	400 V
Min. switching power	1 mA @ 24 V, 10 mA @ 12 V, 100 mA @ 5 V	Rated switching voltage	250 V AC
Switch-off delay	≤ 6 ms	Switch-on delay	≤ 8 ms

Contact data

Contact type	1 CO contact with test button (AgNi 90/10)	Mechanical service life	AC coil 5×10^6 switching cycles, DC coil 10×10^6 switching cycles
--------------	--	-------------------------	---

General data

Test button	yes (lockable, just when removing the detent lock)	Mechanical switch position indicator	Yes
Colour	Transparent	UL 94 flammability rating	V-2

Insulation coordination

Creepage and clearance distance input – output	≥ 8 mm	Dielectric strength of open contact	1 kV _{eff} / 1 min
Dielectric strength, Input/Output	5 kV _{eff} / 1min	Impulse withstand voltage	5 kV (1.2/50 μ s)
Insulating material group	IIIa	Pollution severity	2
Rated voltage	250 V	Surge voltage category	III

Further details of approvals / standards

Standards	IEC 61810-1, UL508	Certificate No. (CSA)	249409-2426937
Certificate No. (VDE)	40018043	Certificate No. (cURus)	E224238

Creation date March 29, 2021 11:30:06 PM CEST

RCI374BB0**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Connection data**

Wire connection method	Plug-in connection	Pitch in mm (P)	5 mm
------------------------	--------------------	-----------------	------

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
ECLASS 9.0	27-37-16-01	ECLASS 9.1	27-37-16-01
ECLASS 10.0	27-37-16-01	ECLASS 11.0	27-37-16-01

Approvals

Approvals



ROHS	Conform
UL File Number Search	E224238

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD


RCI374BB0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Wiring diagram

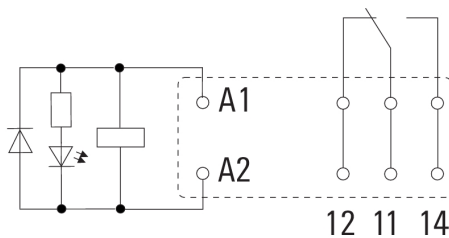


View of Pins from below


Graph



Graph

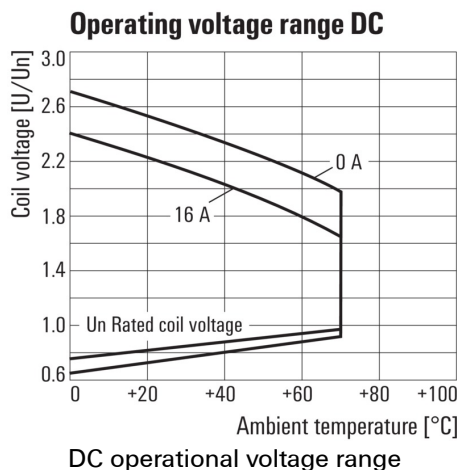

Graph

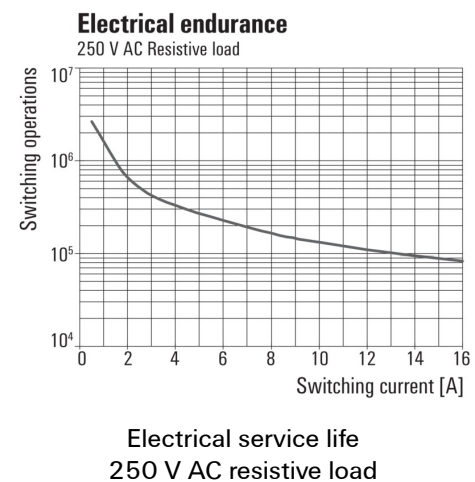


Dimensional drawing



Detailed drawing
Removal of the test button detent lock

Derating curve

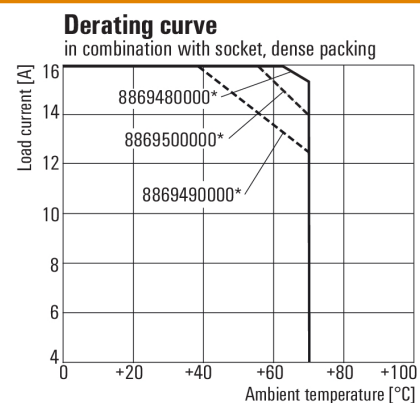

* For full continuous current (16 A), socket connections
11-21, 12-22 and 14-24 must be bridged.

Relay in combination with base

RCI374BB0

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Drawings

Dimensional drawing

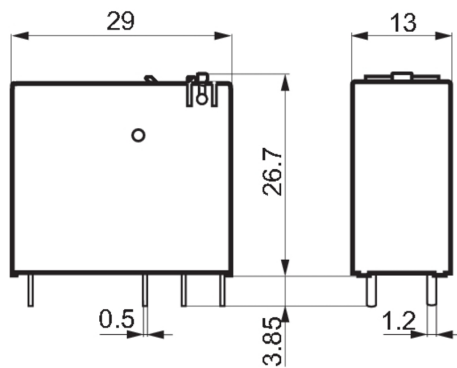

Miscellaneous

		RCI				
Type	RIDER Control Industrial					
Type of construction	3 16 A pinning 5 mm 4 8 A, pinning 5mm					
Type of contact	1 1 CO without push button 2 2 CO without push button 7 1 CO with push button 8 2 CO with push button					
Contact material	4 AgNi 90/10					
		Coil voltage				
		012	12 V DC			
		024	24 V DC			
		048	48 V DC			
		110	110 V DC			
		AB2	12 V DC + LED + diode			
		AC4	24 V DC + LED + diode			
		AE8	48 V DC + LED + diode			
		BB0	110 V DC + LED + diode			
		524	24 V AC			
		615	115 V AC			
		730	230 V AC			
		R24	24 V AC + LED			
		S15	115 V AC + LED			
		T30	230 V AC + LED			

Type codes

Creation date March 29, 2021 11:30:06 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.