

ALPHA 160 DIN, WALL-MOUNTED DB,
SM PARTIALLY EQ. W. RAPID MOUNTING KIT FOR BUILT
-IN DEV.,
RAL 9016, IP43, SK2, H=650 W=1050 D=140



Similar to image

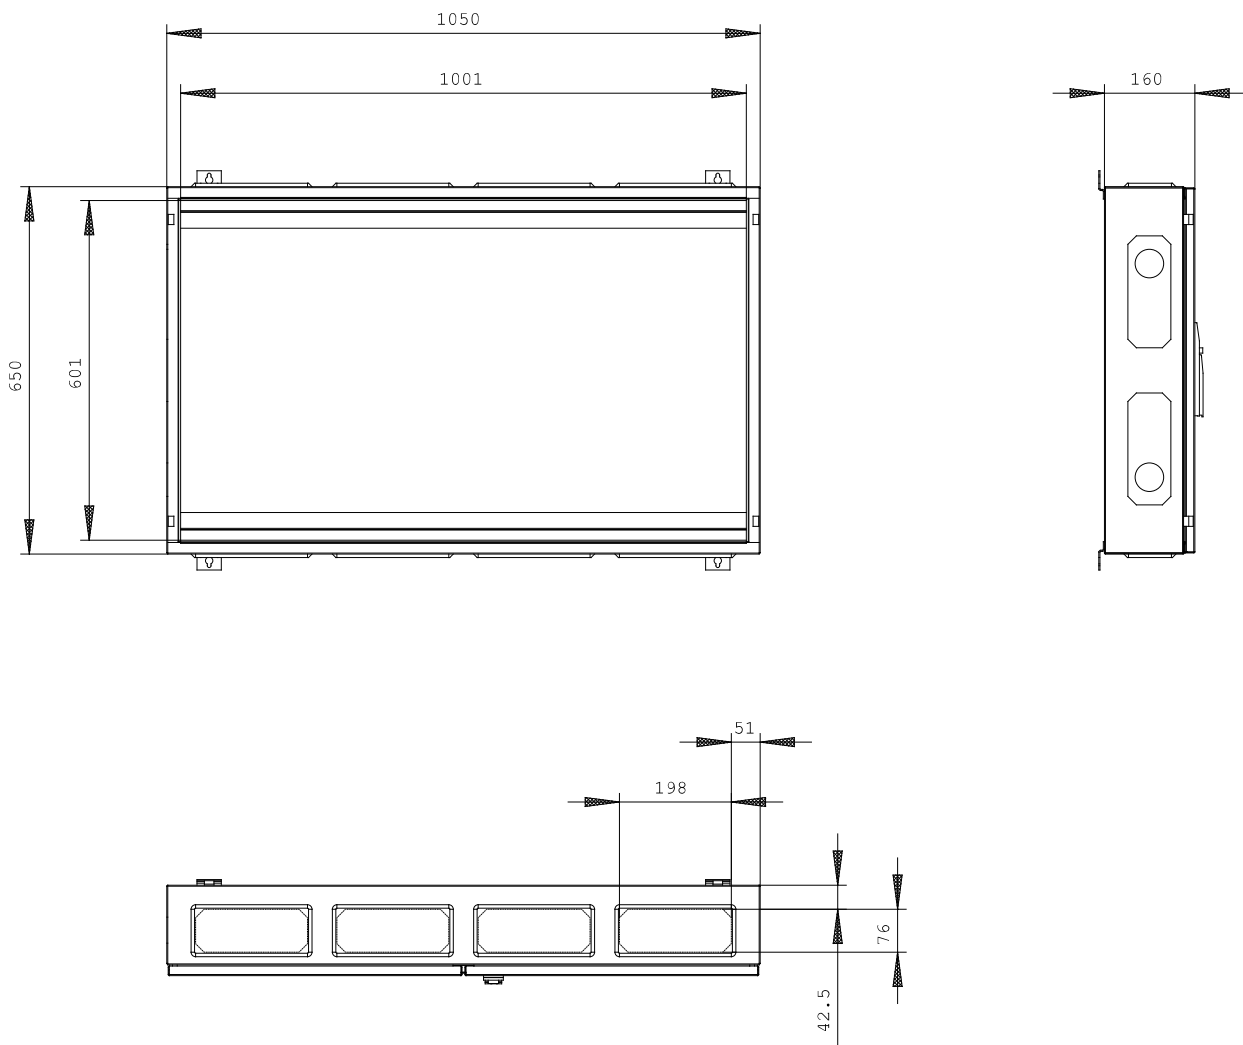
Technical data:

Width	mm	1,050
Height	mm	650
Depth	mm	140
RAL color number		9016
Protection class IP		IP43
Design of the cap/top cover		closed
Mounting depth	mm	140
Surface processing		powder-coated
Acceptability for application / for outside use		No
Suitability for interaction / lightning protection		No
Material / of the enclosure		sheet steel/plastic
Product component		
• cable entry		Yes
• Mounting plate		No
Product extension / optional / Sequence		Yes

Certificates/approvals:

General Product Approval**Declaration of
Conformity****Test Certificates**[other](#)

EG-Konf.

[Special Test
Certificate](#)[Type Test
Certificates/Test
Report](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8GK1052-2KK41>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/8GK1052-2KK41/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8GK1052-2KK41**CAX-Online-Generator**<http://www.siemens.com/cax>

last change:

Oct 8, 2012