



ALPHA 630 DIN FLOOR-MOUNTED DB IP55,
SK I,
RAL 7035 H=1950 W=1050 D=320 INCL. BASE AND
SHEET STEEL DOOR W. OPEN SIDE PANEL INCL. 2-K
FLANGES

Similar to image

Technical data:

Width	mm	1,050
Height	mm	1,950
Depth	mm	320
RAL color number		7035
Protection class IP		IP55
Design of the cap/top cover		others
Mounting depth	mm	320
Surface processing		powder-coated
Acceptability for application / for outside use		No
Suitability for interaction / lightning protection		No
Material / of the enclosure		Steel
Product component		
• cable entry		Yes
• Mounting plate		No
Product extension / optional / Sequence		No

Certificates/approvals:

General Product Approval		Declaration of Conformity	Test Certificates	
	other			Special Test Certificate
GOST		VDE	EG-Konf.	Type Test Certificates/Test Report

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8GK1323-8KP44>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<http://support.automation.siemens.com/WW/view/en/8GK1323-8KP44/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8GK1323-8KP44

CAX-Online-Generator

<http://www.siemens.com/cax>

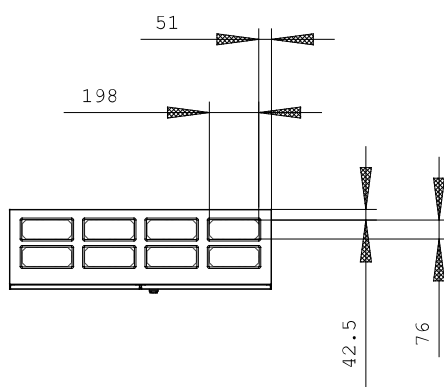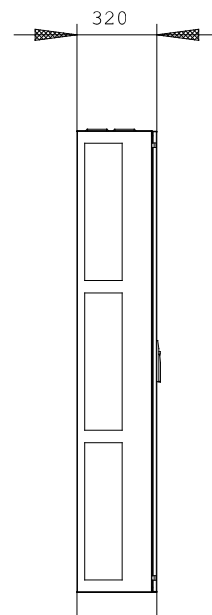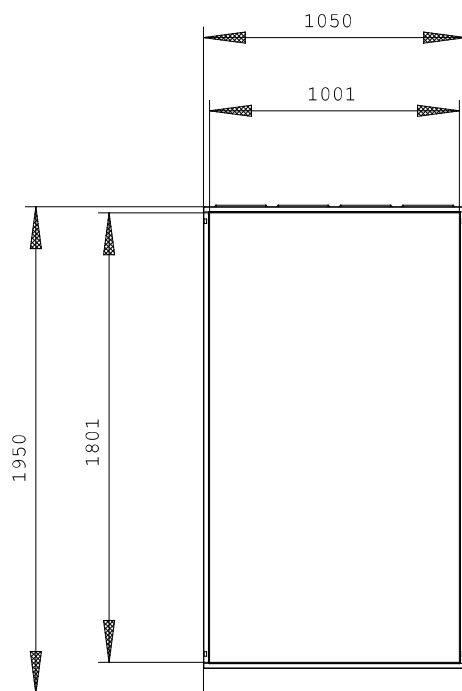

last change:

Oct 8, 2012