

QUICK-THERMOSTAT NO +35 C /+95 F



Similar to image

General details:		
product brand name		SIVACON
mounting position		any
Width	mm	33
Height	mm	47
Depth	mm	33
Net weight	kg	0.03
Operating current / rated value	A	10
Type of voltage		AC
Operating voltage / rated value	V	240
Design of the switching function		NO contact
Material / of the enclosure		plastic
Cut-out temperature	°C	25
Mechanical operating cycles as operating time / typical		100,000
Inrush current / typical	A	10
Operating temperature	°C	-40 ... +80
Ambient temperature		
• during storage	°C	-45 ... +80
Relative humidity / reference value	%	90

Item designation

- according to DIN EN 61346-2
- according to DIN EN 81346-2

K

K

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8MR2171-3BB/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8MR2171-3BB

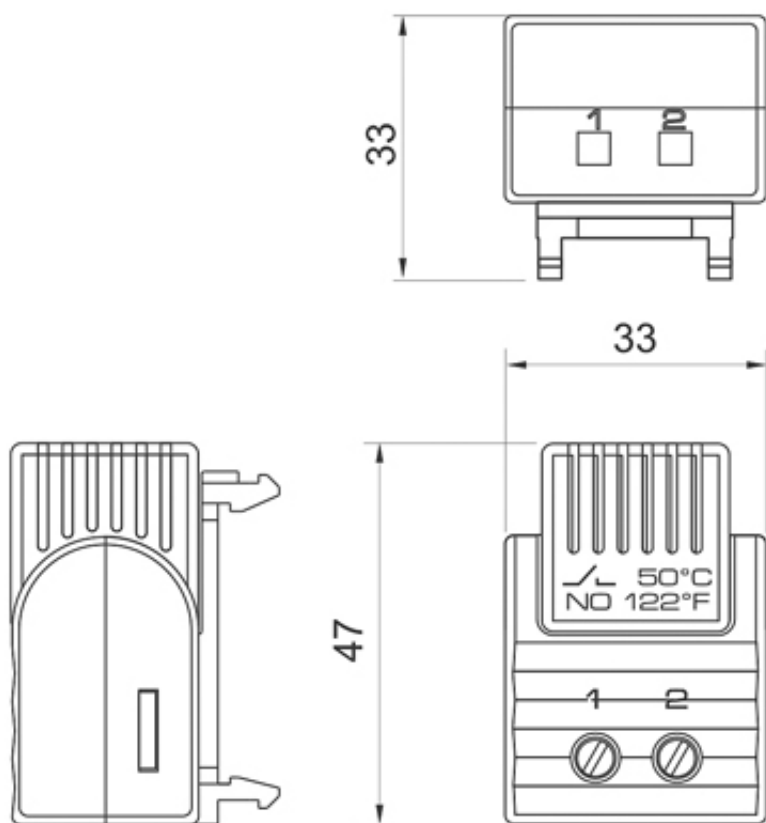

last change:

Jul 7, 2014