


BRANCH TERMINAL THERMOPLASTIC SCREW
TERMINAL BEIGE,
6MM, SZ 2.5

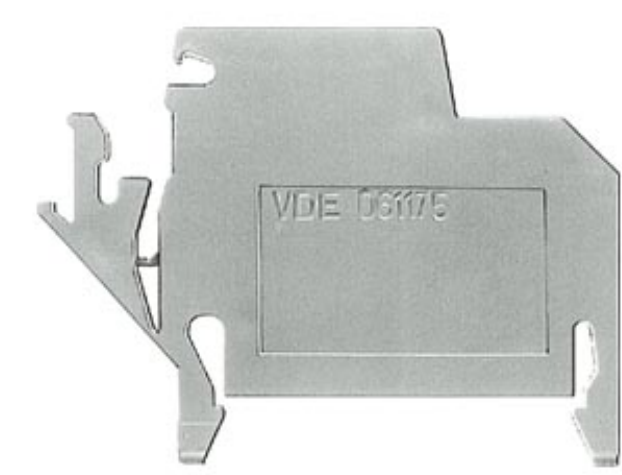

Similar to image

Technical data:		
Mounting type		others
Length	mm	55
Color		miscellaneous
Busbar design		6x6 mm
Design of the electrical connection		screw-type terminals
Number of terminal points		1
Height / with lowest-profile installation	mm	35
Operating voltage / rated value	V	600
Operating current / rated value	A	26
Combustibility class acc. to UL 94		others
Insulation material		thermoplastic
Terminal contact spacing	mm	6
Product component / required / connection plate		No
Conductor cross-section that can be connected		
• multibrin	mm²	2.5 ... 2.5
• finely stranded		
• with wire end processing	mm²	2.5 ... 2.5

Certificates/approvals:

General Product Approval**Declaration of Conformity****Shipping Approval****other**[other](#)[Environmental
Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-1NF02>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/8WA1011-1NF02/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NF02**CAX-Online-Generator**<http://www.siemens.com/cax>**last change:**

Mar 17, 2014