

BRANCH TERMINAL THERMOPLASTIC SCREW TERMINAL
BEIGE, 6.5MM, SZ 4

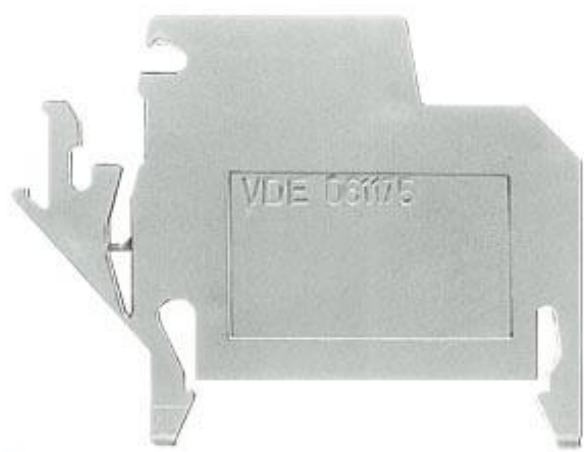


Figure similar

Model	
Product brand name	ALPHA
Busbar design	6x6 mm
General technical data	
Insulation material	thermoplastic
Terminal contact spacing	6.5 mm
Protection class	
Combustibility class acc. to UL 94	others
Main circuit	
Operating voltage / rated value	600 V
Operating current / rated value	40 A
Appearance	
Color	miscellaneous
Product details	
Product component / required / connection plate	No

Number	
Number of terminal points	1

Connections	
Connectable conductor cross-section / stranded	
• minimum	4 mm ²
• maximum	4 mm ²
Wire stripping length	11 mm
Connectable conductor cross-section	
• finely stranded	
— with core end processing / minimum	4 mm ²
— with core end processing / maximum	4 mm ²
Tightening torque / with screw-type terminals	
• minimum	0.5 N·m
• maximum	0.5 N·m
Type of electrical connection	screw-type terminals

Mechanical Design	
Height / with lowest-profile installation	35 mm
Length	55 mm
Mounting type	others
Net weight	14 g
Material / of the insulating body	Thermoplast

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------



[Miscellaneous](#)



GL

other

[Environmental
Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-1NG32>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-1NG32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NG32

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>