


BRANCH TERMINAL THERMOPLASTIC SCREW
TERMINAL BEIGE,
7.2MM, SZ 6

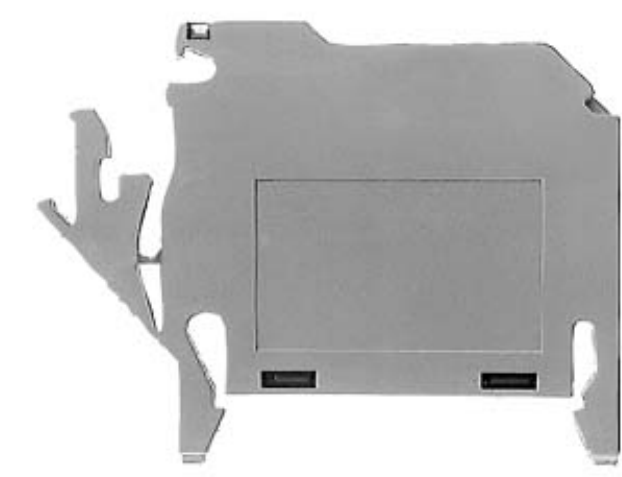

Similar to image

Technical data:		
Mounting type		others
Length	mm	55
Color		miscellaneous
Busbar design		6x6 mm
Design of the electrical connection		screw-type terminals
Number of terminal points		1
Height / with lowest-profile installation	mm	35
Operating voltage / rated value	V	300
Operating current / rated value	A	73
Combustibility class acc. to UL 94		others
Insulation material		thermoplastic
Terminal contact spacing	mm	10
Product component / required / connection plate		No
Conductor cross-section that can be connected		
• multibrin	mm²	16 ... 16
• finely stranded		
• with wire end processing	mm²	16 ... 16

Certificates/approvals:

General Product Approval			Declaration of Conformity	Shipping Approval	
	 GOST	 UL	 EG-Konf.	 DNV	 GL
other					

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-1NK02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-1NK02/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1NK02

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 17, 2014