

PE TERMINAL 2 SCREW TERMINALS GREEN-YELLOW, 7.2MM, SZ 4

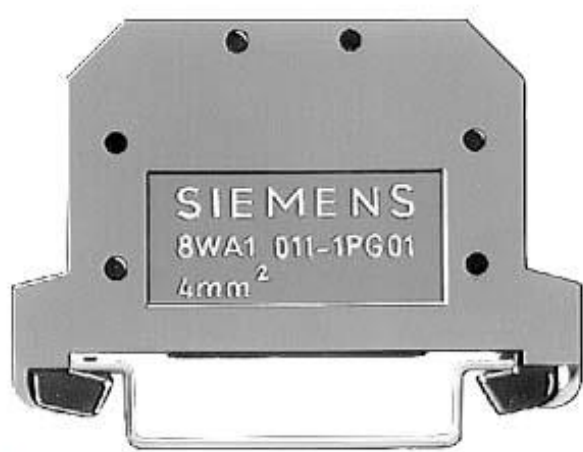


Figure similar

General technical data	
Insulation material	thermoplastic
Terminal contact spacing	7.2 mm
Protection class	
Combustibility class acc. to UL 94	V2
Appearance	
Color	green-yellow
Product details	
Product feature / PEN function	No
Product component / required / connection plate	No
Number	
Number of terminal levels	2
Number of terminal points / per terminal level	1
Connections	
Connectable conductor cross-section / stranded	

• maximum	4 mm ²
Wire stripping length	11 mm
Connectable conductor cross-section	
• solid	
— maximum	4 mm ²
• finely stranded	
— with core end processing / maximum	4 mm ²
— without core end processing / maximum	4 mm ²
Tightening torque / with screw-type terminals	
• minimum	0.5 N·m
• maximum	0.5 N·m
Type of electrical connection	
• 1	screw-type terminal
• 2	screw-type terminal
Position / of the terminal	lateral

Mechanical Design	
Height / with lowest-profile installation	30 mm
Length	51 mm
Mounting type	DIN rail 35 mm
Net weight	24.4 g

Environmental conditions	
Ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	55 °C

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------------	----------------------------------	--------------------------	--------------------------



EG-Konf.

[sonstig](#)



Shipping Approval	other
--------------------------	--------------

[Umweltbestätigung](#)



GL

Further information
Information- and Downloadcenter (Catalogs, Brochures,...)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1011-1PG00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WA1011-1PG00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1PG00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>