

Two-tier terminal thermoplast connection on both sides Diode terminal, 6.5 mm Sz. 4

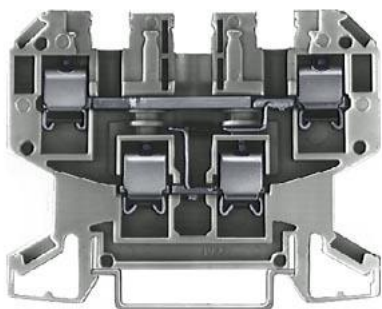


Figure similar

Model	
product brand name	ALPHA
design of terminal / terminal levels internally linked	No
General technical data	
component type	diode
insulation material	others
terminal contact spacing	6.5 mm
operating voltage / rated value	250 V
Protection class	
combustibility class acc. to UL 94	others
Main circuit	
operational current / rated value	32 A
Appearance	
color	grey
Product details	
product component / required / end cover plate	No
Number	
number of terminal levels	2
number of terminal points / per terminal level	2
Connections	
stripped length	11 mm
connectable conductor cross-section / solid	
• minimum	4 mm ²
• maximum	4 mm ²
connectable conductor cross-section / stranded	
• minimum	4 mm ²
• maximum	4 mm ²
connectable conductor cross-section / finely stranded	
• with core end processing / minimum	4 mm ²
• with core end processing / maximum	4 mm ²
• without core end processing / minimum	4 mm ²
• without core end processing / maximum	4 mm ²
tightening torque / with screw-type terminals	
• minimum	0.5 N·m
• maximum	0.5 N·m
type of connection	
• 1	screw-type terminal
• 2	screw-type terminal

position / of the terminal		top		
Mechanical Design				
height / with lowest-profile installation		45 mm		
length		64 mm		
fastening method		DIN rail 35 mm		
material / of the insulating body		Other		
General Product Approval		Declaration of Conformity	Test Certificates	other



[Miscellaneous](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-6EG20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-6EG20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-6EG20

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>



