


G FUSE LINK DIN 41660 QUICK-RESPONSE HIGH
BREAKING CAPACITY RATED UNINT. CURRENT 2.5A

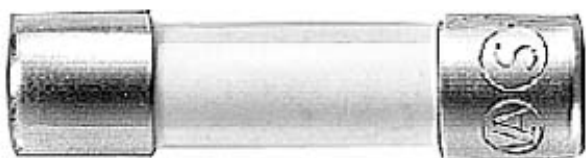

Similar to image

Technical data:

product brand name		SETRON
Operating voltage / rated value	V	250
Operating current / rated value	A	2.5
Taille de la cartouche fusible		5x25 mm
Type of microfuse		glass fuse
Melting characteristics		quick acting (F)
Product component / visual fault warning		No

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
  GOST	 EG-Konf.	other Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WA1822-7EF21>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/8WA1822-7EF21/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1822-7EF21

CAX-Online-Generator
<http://www.siemens.com/cax>

last change:

Mar 17, 2014