



BUZZER ELEMENT 24V AC/DC (PULSAT./CONTIN. TONE ADJUST.)

General technical details:

product brand name		SIRIUS
Type of voltage		
• of operating voltage		AC/DC
Operating voltage		
• 1 / for DC / rated value	V	24
• 1 / at 50 Hz / for AC / rated value	V	24
• 1 / at 60 Hz / for AC / rated value	V	24
Design of the acoustic signal type		continuous tone / pulse tone
Loudness level	dB	80
Reference code		
• according to DIN EN 61346-2		P

Mechanical design:

Mounting type		Bayonet
External diameter / of the signal column element	mm	50

Ambient conditions:

Ambient temperature		
• during operating	°C	-20 ... +50
Protection class IP		IP54

Product function / adjustable acoustic signal		Yes
Height	mm	72
Width	mm	52

Certificates/approvals:

General Product Approval		EMC	Declaration of Conformity	Shipping Approval
 UL		 C-TICK	 EG-Konf.	 DNV

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WD4220-0FA/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4220-0FA

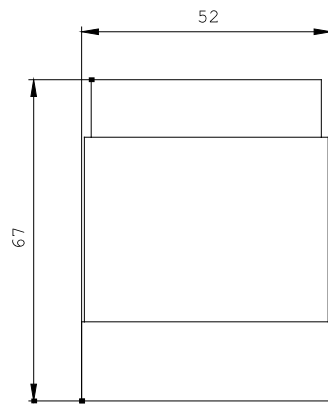

\W9.4444;
 \W6.8611; 8WD

last change:

Jun 16, 2014