



SIGNALLING COLUMN CONNECT. ELEMENT FOR WITH
BASE MOUNT./ANGLE MOUNT. COVER LID AND SEAL
FOR SCREW CONNECTION

General technical details:

product brand name		SIRIUS
product designation		signaling columns element, connection module
Type of voltage		
• of the operating voltage		AC/DC
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating voltage		
• for DC / rated value	V	230 ... 24
• at 50 Hz / at AC / rated value	V	24 ... 230
• at 60 Hz / at AC / rated value	V	24 ... 230
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		E
• according to DIN EN 61346-2		X

Mechanical design:

Design of the electrical connection		screw-type terminals
Type of mounting		
• pipe mounting		No

• angle mounting		Yes
• floor mounting		Yes
Color / of the housing		black
External diameter / of the signal column element	mm	70

Ambient conditions:

Ambient temperature		
• during operating	°C	-20 ... +50
Protection class IP		IP65
Depth	mm	70
Height	mm	42
Width	mm	70

Certificates/approvals:

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
 GOST	 UL	 C-TICK	 EG-Konf.	 DNV

[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WD4408-0AB/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4408-0AB

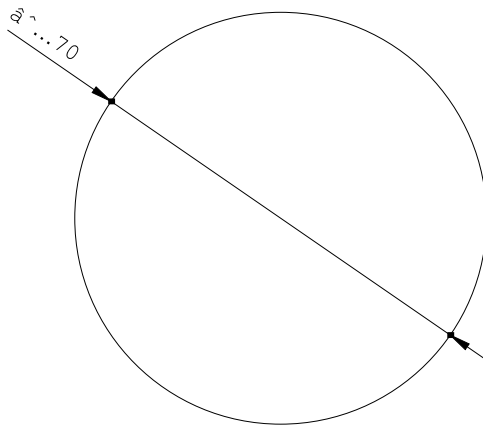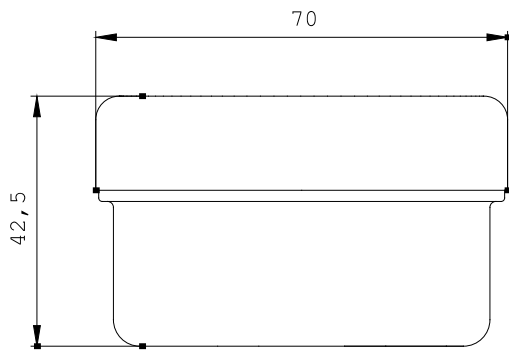

\pi
\pi

last change:

Jan 23, 2013