



SIGNALLING COLUMN BUZZER ELEMENT CONTINUOUS
SOUND OR PULSED ADJUSTABLE,
24V AC/DC

General technical details:

product brand name		SIRIUS
product designation		signaling columns element, accoustic
Type of voltage • of the supply voltage • of the acoustic signal element		AC/DC
Consumed current / for rated value of supply voltage	mA	25
Supply voltage / 1 / of the acoustic signal element • at 50 Hz / for AC / rated value • at 60 Hz / for AC / rated value • for DC / rated value	V	24
	V	24
	V	24
Design of the acoustic signal type		continuous tone / pulse tone
Loudness level	dB	80
Item designation • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		H
		P

Mechanical design:

Color / of the housing		black
External diameter / of the signal column element	mm	70

Ambient conditions:

Ambient temperature

- during operating

°C

-20 ... +50

Protection class IP

IP65

Product function / adjustable acoustic signal

Yes

Depth

mm

70

Height

mm

56

Width

mm


70

Certificates/approvals:

General Product Approval**EMC****Declaration of
Conformity****Shipping Approval****other**[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**Cax online generator:**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/8WD4420-0FA/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4420-0FA

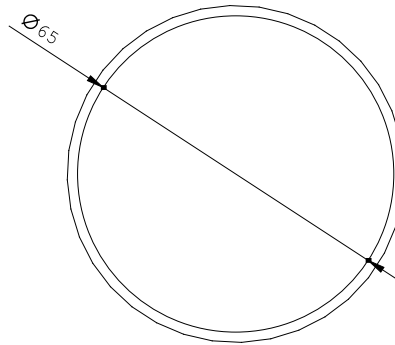

\W9.4444;
 \W6.8333; 8WD44...-

last change:

Jan 23, 2013