



BUILT-IN LUMINAIRE STEADY BURNING LIGHT,
12 - 230V UC, YELLOW

General technical details:

product designation		continous light
Type of voltage		
• of the operating voltage		AC/DC
Operating frequency		
• 1 / rated value	Hz	50
Operating voltage		
• 1 / for DC / rated value	V	24
• at 50 Hz / at AC / rated value	V	24 ... 230
Recorded real power	W	5
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		H
• according to DIN EN 61346-2		P

Mechanical design:

Product component / fluorescent materials		No
Type of mounting		screw fixing
Material / of the enclosure		thermoplast
Color / of the lens		yellow
External diameter / of the signal column element	mm	70

Lamp:

Execution of the mounting		BA 15d
Design of the light		lights for filament lamp/LED
Nature of fluorescent material		filament lamp / LED

Ambient conditions:

Ambient temperature		
• during operating	°C	-20 ... +60
Protection class IP		IP65
Depth	mm	75
Height	mm	96.5
Width	mm	75

Certificates/approvals:**General Product Approval****EMC****Declaration of Conformity****Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WD5300-1AD/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD5300-1AD

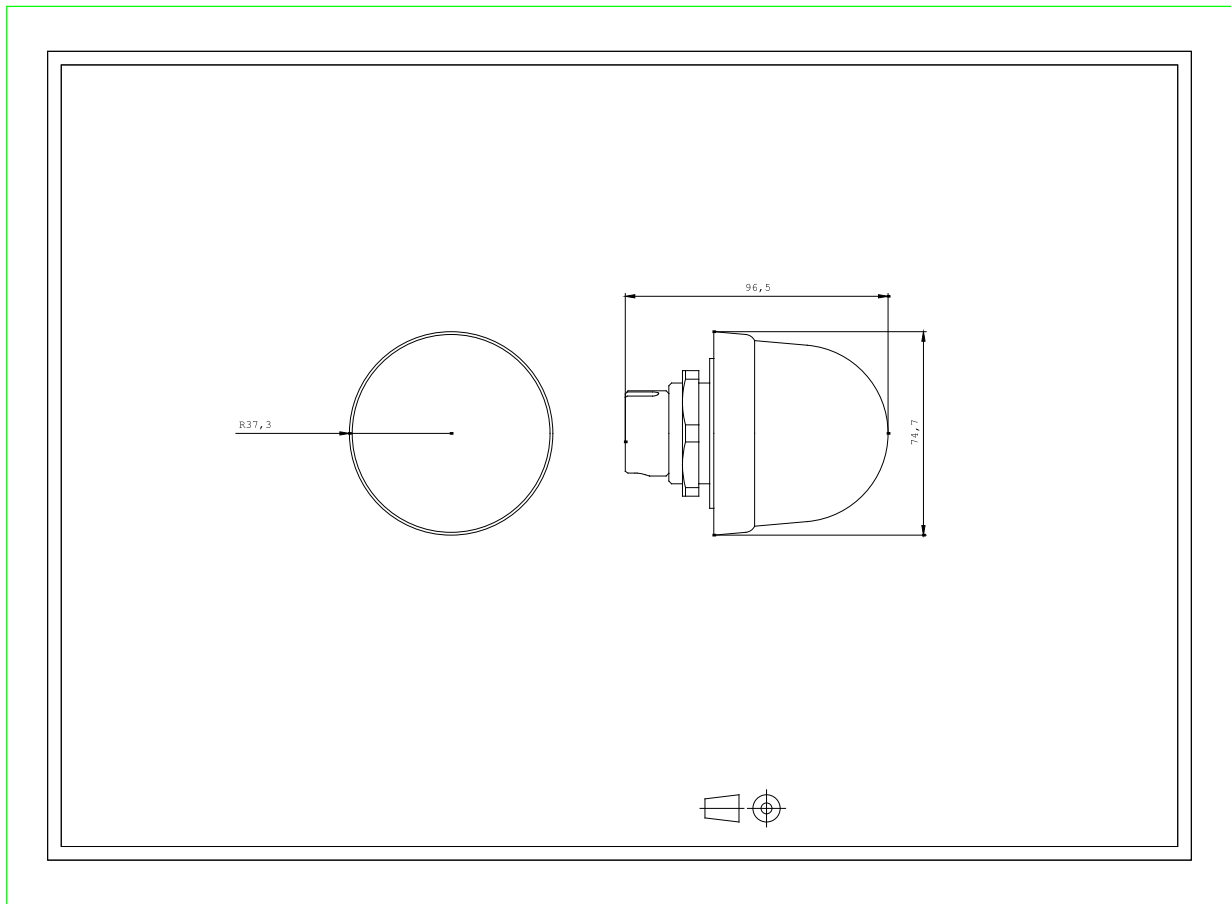

last change:

Jan 23, 2013