


PE-THROUGH-TYPE TERMINALS WITH SCREW CONNECTION
TERMINAL WIDTH 12,0 MM COLOR GREEN-YELLOW 16 MM2

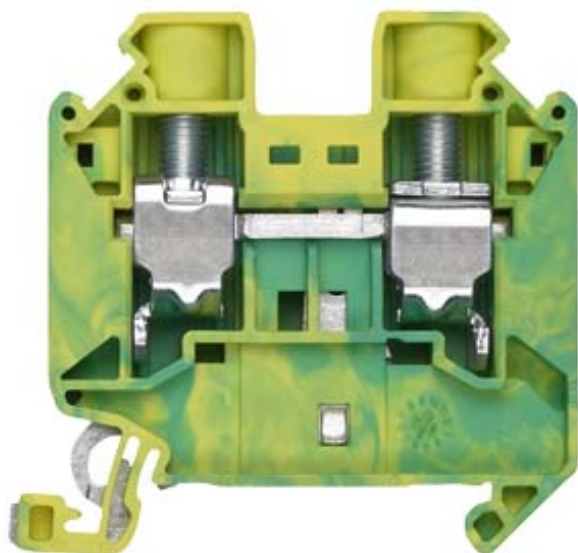

Model	
Design of terminal / Terminal levels internally linked	No
General technical data	
Terminal contact spacing	12 mm
Protection class	
Combustibility class acc. to UL 94	V0
Appearance	
Color	Green-yellow
Product details	
Product component / required / connection plate	Yes
Number	
Number of terminal levels	1
Number of terminal points / per terminal level	2
Connections	
Wire stripping length	14 mm
Connectable conductor cross-section	

• solid — minimum 1.5 mm² — maximum 25 mm² • finely stranded — with core end processing / minimum 1.5 mm² — with core end processing / maximum 16 mm²	
Tightening torque / with screw-type terminals	
• minimum 2.5 N·m • maximum 3 N·m	
Type of electrical connection	
• 1 screw-type terminal • 2 screw-type terminal	
Position / of the terminal	lateral

Mechanical Design	
Height / with lowest-profile installation	55 mm
Length	55.3 mm
Mounting type	DIN rail 35 mm
Net weight	47 g
Material / of the insulating body	Thermoplast

Environmental conditions	
Ambient temperature	
• during operation / minimum -25 °C • during operation / maximum 55 °C	

Certificates		
Design tested acc. to type of protection / EEx e	No	
General Product Approval	Declaration of Conformity	other



[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH1000-0CK07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH1000-0CK07/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH1000-0CK07

CAX-Online-Generator

<http://www.siemens.com/cax>

