


FEED-THROUGH TERMINAL WITH SPRING CONNECTION,  
SECTION: 1,5 SQMM, WIDTH: 4,2 MM,  
COLOR:ORANGE

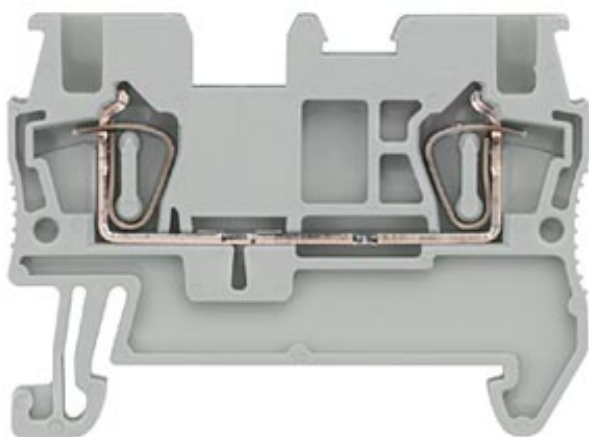

Similar to image

| Technical data:                                        |    |                        |
|--------------------------------------------------------|----|------------------------|
| Operating current / rated value                        | A  | 17.5                   |
| Operating voltage / rated value                        | V  | 500                    |
| Mounting type                                          |    | DIN rail 35 mm         |
| Combustibility class acc. to UL 94                     |    | V0                     |
| Material / of the insulating body                      |    | Other                  |
| Design of the electrical connection                    |    |                        |
| • 1                                                    |    | spring-loaded terminal |
| • 2                                                    |    | spring-loaded terminal |
| Design tested acc. to type of protection / EEx e       |    | No                     |
| Product component / required / connection plate        |    | No                     |
| Number of terminal levels                              |    | 1                      |
| Number of terminal points / per terminal level         |    | 2                      |
| Design of terminal / terminal levels linked internally |    | No                     |
| Terminal contact spacing                               | mm | 4.2                    |
| Position / of terminal                                 |    | top                    |
| Color                                                  |    | orange                 |
| Ambient temperature                                    |    |                        |
| • during operating                                     | °C | -25 ... +55            |

**Conductor cross-section that can be connected**

- solid
- multibrin
- finely stranded
  - without wire end processing
  - with wire end processing

|                 |             |
|-----------------|-------------|
| mm <sup>2</sup> | 1.5 ... 1.5 |
| mm <sup>2</sup> | 1.5 ... 1.5 |
| mm <sup>2</sup> | 1.5 ... 1.5 |
| mm <sup>2</sup> | 1.5 ... 1.5 |

**Certificates/approvals:****General Product Approval****Declaration of Conformity****Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH2000-0AE04>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/8WH2000-0AE04/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8WH2000-0AE04](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2000-0AE04)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**last change:**

Aug 4, 2014