


ISOLATING BLADE TERMINAL WITH SPRING CONNECTION,
SECTION: 0.5 - 4 MM², WIDTH: 6.2 MM, COLOR: GRAY WITH
BLADE

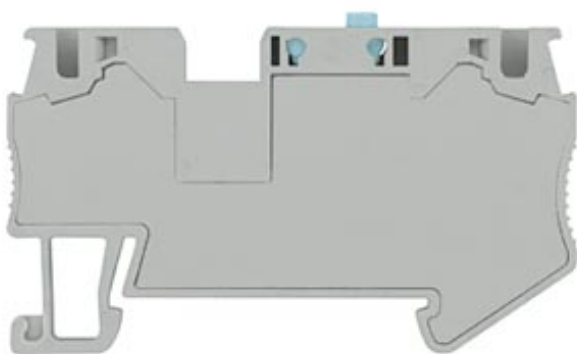

Model	
Type of longitudinal separation	others
Type of lateral separation	without
Design of terminal / Terminal levels internally linked	No
General technical data	
Insulation material	others
Terminal contact spacing	6.2 mm
Protection class	
Combustibility class acc. to UL 94	V0
Main circuit	
Operating voltage / rated value	400 V
Operating current / rated value	16 A
Appearance	
Color	grey
Product details	
Product component	
required / connection plate	No

- Test socket

No

Number

Number of terminal levels	1
Number of terminal points / per terminal level	2

Connections

Connectable conductor cross-section / stranded

- minimum 0.25 mm²
- maximum 4 mm²

Wire stripping length	12 mm
-----------------------	-------

Connectable conductor cross-section

- solid
 - minimum 4 mm²
 - maximum 4 mm²
- finely stranded
 - with core end processing / minimum 2.5 mm²
 - with core end processing / maximum 2.5 mm²
 - without core end processing / minimum 2.5 mm²
 - without core end processing / maximum 2.5 mm²

Type of electrical connection

- 1 spring-loaded terminal
- 2 spring-loaded terminal

Position / of the terminal	top
----------------------------	-----

Mechanical Design

Height / with lowest-profile installation	36.5 mm
Length	61.5 mm
Mounting type	DIN rail 35 mm
Material / of the insulating body	Other

General Product Approval

Declaration of Conformity



UL

EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH2000-6CG00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH2000-6CG00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2000-6CG00

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://www.siemens.com/specifications>