

THREE-TIER TERM.2,5 MM2 GREY

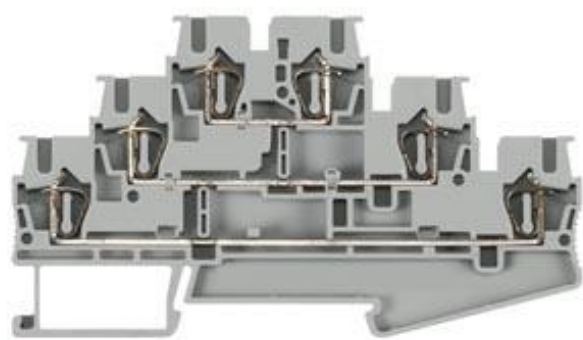


Figure similar

General technical data	
Insulation material	others
Terminal contact spacing	5.2 mm
Protection class	
Combustibility class acc. to UL 94	V0
Main circuit	
Operating voltage / rated value	500 V
Operating current / rated value	24 A
Appearance	
Color / of the insulating body	gray
Product details	
Product feature	
• N function	No
• N separation slides	No
• PE function	No
Product component	

- required / connection plate
- Test separator

No

No

Number

Number of potentials

3

Connections

Connectable conductor cross-section / stranded

- minimum
- maximum

0.08 mm²2.5 mm²

Connectable conductor cross-section

- solid

— minimum

0.08 mm²

— maximum

4 mm²

- finely stranded

— with core end processing / minimum

0.25 mm²

— with core end processing / maximum

2.5 mm²

— without core end processing / minimum

0.08 mm²

— without core end processing / maximum

2.5 mm²

Type of electrical connection

- 1
- 2

spring-loaded terminal

spring-loaded terminal

Position / of the terminal

top

Mechanical Design

Height / with lowest-profile installation

58 mm

Length

99.5 mm

Mounting type

DIN rail 35 mm

Environmental conditions

Ambient temperature

- during operation / maximum

55 °C

General Product
ApprovalDeclaration of
Conformity

other


[sonstig](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH2030-0AF00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH2030-0AF00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH2030-0AF00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>