


ISOLATION BLADE TERMINALS

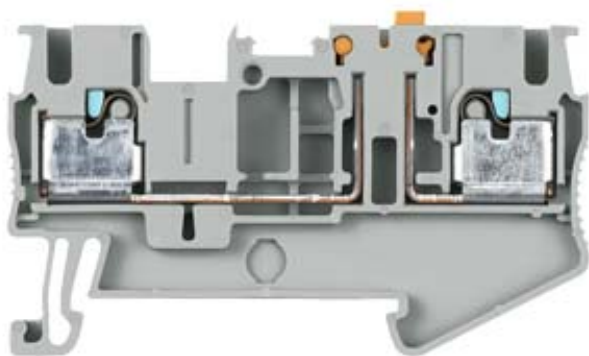

Similar to image

Technical data:		
Mounting type		DIN rail 35 mm
Type of longitudinal separation		swivel-mounted
Type of lateral separation		without
Length	mm	60.5
Color		grey
Height / with lowest-profile installation	mm	36.5
Number of terminal levels		1
Number of terminal points / per terminal level		2
Design of terminal / terminal levels linked internally		No
Operating voltage / rated value	V	400
Operating current / rated value	A	20
Combustibility class acc. to UL 94		V0
Terminal contact spacing	mm	5.2
Position / of terminal		top
Product component		
• required / connection plate		Yes
• Test socket		Yes
Design of the electrical connection		

• 1		connector
• 2		plug terminal connection
Conductor cross-section that can be connected		
• solid	mm ²	0.14 ... 4
• multibrin	mm ²	0.14 ... 2.5
• finely stranded		
• with wire end processing	mm ²	0.14 ... 2.5
• without wire end processing	mm ²	0.14 ... 2.5

Certificates/approvals:

General Product Approval



Declaration of Conformity

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH6000-6AF00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH6000-6AF00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH6000-6AF00

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 17, 2014