


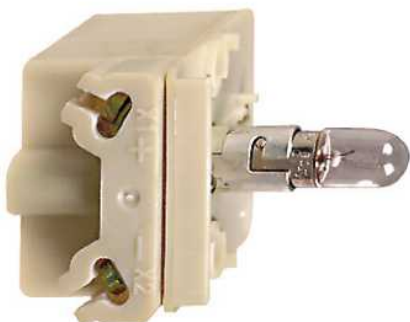

### Main

|                           |                                 |
|---------------------------|---------------------------------|
| Range of product          | Harmony 9001K<br>Harmony 9001SK |
| Product or component type | Light block                     |
| Device short name         | 9001K                           |
| Light block supply        | Direct                          |

### Complementary

|                           |                 |
|---------------------------|-----------------|
| Product weight            | 0.115 kg        |
| Light source              | LED             |
| Light block colour        | Green           |
| [Us] rated supply voltage | 24...28 V AC/DC |

### Environment

|                                            |                                                                                                                |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Protective treatment                       | TC                                                                                                             |
| Ambient air temperature for storage        | -40...70 °C                                                                                                    |
| Ambient air temperature for operation      | -25...70 °C                                                                                                    |
| IP degree of protection                    | IP20 conforming to IEC 60529                                                                                   |
| Standards                                  | CSA C22-2 No 14<br>EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>JIS C 4520<br>JIS C 852<br>UL 508 |
| Product certifications                     | NEMA<br>UL 508                                                                                                 |
| Class of protection against electric shock | Class II conforming to IEC 61140                                                                               |
| Vibration resistance                       | 7 gn (f = 2...500 Hz) conforming to IEC 60068-2-6                                                              |
| Shock resistance                           | 50 gn conforming to IEC 60068-2-27                                                                             |


### Offer Sustainability

|                          |                                                                                                                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status | Not Green Premium product                                                                                                |
| RoHS                     | Compliant - since 0921 - Schneider Electric declaration of conformity <a href="#">download declaration of conformity</a> |

---

Dimensions

---

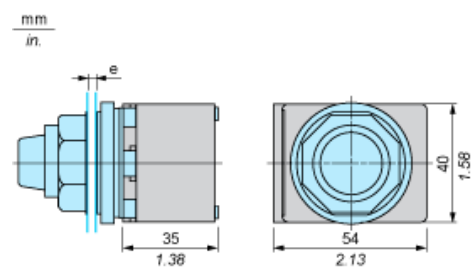

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.