



## Main

|                           |                                                   |
|---------------------------|---------------------------------------------------|
| Range of product          | Harmony 9001SK                                    |
| Product or component type | Complete non-illuminated mushroom head pushbutton |
| Device short name         | 9001SK                                            |
| Type of operator          | Push-pull                                         |
| Operator profile          | Black mushroom Ø 41 mm unmarked                   |

## Complementary

|                                                          |                                                                                                                                                                                                                                |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bezel material                                           | Plastic                                                                                                                                                                                                                        |
| Mounting diameter                                        | 30 mm                                                                                                                                                                                                                          |
| CAD overall width                                        | 46 mm                                                                                                                                                                                                                          |
| CAD overall height                                       | 45 mm                                                                                                                                                                                                                          |
| CAD overall depth                                        | 69 mm                                                                                                                                                                                                                          |
| Product weight                                           | 0.159 kg                                                                                                                                                                                                                       |
| Operating position                                       | Any position                                                                                                                                                                                                                   |
| Shape of signaling unit head                             | Round                                                                                                                                                                                                                          |
| Operator position information                            | 2 positions                                                                                                                                                                                                                    |
| Contacts type and composition                            | 1 C/O                                                                                                                                                                                                                          |
| Positive opening                                         | Without                                                                                                                                                                                                                        |
| Mechanical durability                                    | 5000000 cycles                                                                                                                                                                                                                 |
| Connections - terminals                                  | Screw clamp terminals (1 x 0.22...2 x 1.5 mm <sup>2</sup> ) conforming to EN/IEC 60947-1                                                                                                                                       |
| Tightening torque                                        | 0.8 N.m conforming to EN/IEC 60947-1                                                                                                                                                                                           |
| Shape of screw head                                      | Cross slotted head                                                                                                                                                                                                             |
| Contacts material                                        | Silver alloy contacts                                                                                                                                                                                                          |
| Short circuit protection                                 | 10 A cartridge fuse conforming to EN/IEC 60947-5-1                                                                                                                                                                             |
| [I <sub>th</sub> ] conventional free air thermal current | 10 A                                                                                                                                                                                                                           |
| [U <sub>i</sub> ] rated insulation voltage               | 250 V (degree of pollution: 3) conforming to EN/IEC 60947-1                                                                                                                                                                    |
| [U <sub>imp</sub> ] rated impulse withstand voltage      | 2.5 kV conforming to EN/IEC 60947-1                                                                                                                                                                                            |
| [I <sub>e</sub> ] rated operational current              | 0.55 A at 125 V DC-13, A600-Q600 conforming to NEMA<br>3 A at 240 V AC-15, A600-Q600 conforming to NEMA                                                                                                                        |
| [I <sub>cm</sub> ] rated short-circuit making capacity   | <= 60 kA at 120 V AC-15, 7200 VA<br><= 30 kA at 240 V AC-15, 7200 VA<br><= 15 kA at 480 V AC-15, 7200 VA<br><= 12 kA at 600 V AC-15, 7200 VA                                                                                   |
| Rated breaking capacity                                  | <= 1.5 kA at 480 V AC-15, 720 VA<br><= 1.2 kA at 600 V AC-15, 720 VA<br><= 0.55 kA at 125 V DC-13<br><= 0.27 kA at 250 V DC-13<br><= 0.1 kA at 600 V DC-13<br><= 6 kA at 120 V AC-15, 720 VA<br><= 3 kA at 240 V AC-15, 720 VA |


## Environment

|                                            |                                                                                                                |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Protective treatment                       | TC                                                                                                             |
| Ambient air temperature for storage        | -40...70 °C                                                                                                    |
| Ambient air temperature for operation      | -25...70 °C                                                                                                    |
| Class of protection against electric shock | Class II conforming to IEC 61140                                                                               |
| IP degree of protection                    | IP66 conforming to IEC 60529                                                                                   |
| NEMA degree of protection                  | NEMA 4X<br>NEMA 4<br>NEMA 3R<br>NEMA 3<br>NEMA 2<br>NEMA 13<br>NEMA 12<br>NEMA 1                               |
| Standards                                  | UL 508<br>JIS C 852<br>JIS C 4520<br>EN/IEC 60947-5-4<br>EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>CSA C22-2 No 14 |
| Product certifications                     | NEMA<br>UL 508                                                                                                 |
| Vibration resistance                       | 7 gn (f = 2...500 Hz) conforming to IEC 60068-2-6                                                              |
| Shock resistance                           | 50 gn conforming to IEC 60068-2-27                                                                             |

## Offer Sustainability

|                          |                                                                                                                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status | Not Green Premium product                                                                                                |
| RoHS                     | Compliant - since 0921 - Schneider Electric declaration of conformity <a href="#">download declaration of conformity</a> |

## Dimensions

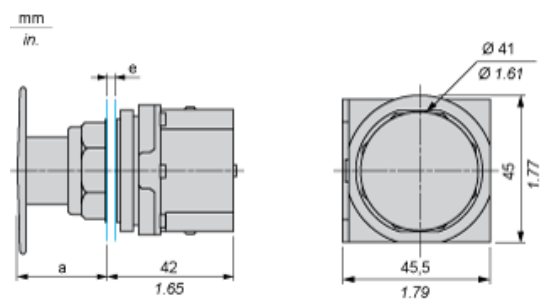


- e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.  
a 32 mm / 1.26 in.

---

Contact Block Mounting Position

---

Top and Rear views

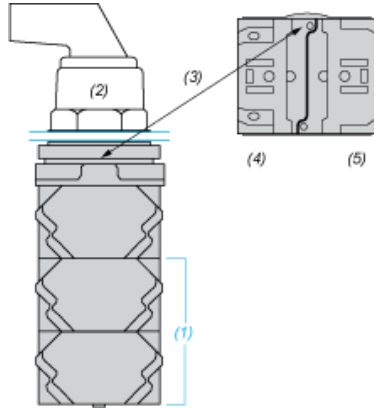

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2