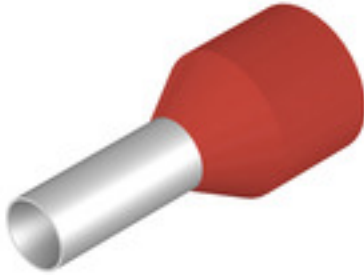


H10,0/24,0X R SV**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

- Polypropylene conical cable entry
 - Heat-resistant up to 105°C
- for conductors from 1.5 to 16 mm² (AWG 16-6)
tin-plated copper
dimensional tolerances to DIN 46228 part 4

General ordering data

Version	Wire-end ferrule, insulated, 17 mm, 12 mm, red
Order No.	9006830000
Type	H10,0/24,0X R SV
GTIN (EAN)	4008190332310
Qty.	100 pc(s).
Packaging	Multipack bag

Creation date March 30, 2021 12:15:29 AM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

H10,0/24,0X R SV**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight	0.64 g
------------	--------

Technical data

Description of article	Wire end ferrule for short-circuit-proof and earth-fault-proof lines, red	Version	insulated
------------------------	---	---------	-----------

Wire-end ferrules

Collar diameter (D2)	9.6 mm	Colour code	Weidmüller
Conductor cross-section	10 mm ²	Contact surface diameter (D1)	4.6 mm
Contact surface length (L2)	12 mm	L1 in mm	24 mm
Metal sleeve thickness (S1)	0.2 mm	Plastic collar thickness (S2)	0.3 mm
Stripping length	17 mm	Wire connection cross section AWG, max.	AWG 8

Classifications

ETIM 6.0	EC000005	ETIM 7.0	EC000005
ECLASS 9.0	27-40-02-01	ECLASS 9.1	27-40-02-01
ECLASS 10.0	27-40-02-01	ECLASS 11.0	27-40-02-01

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Technical information - EN Technical information - DE

H10,0/24,0X R SV**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Drawings****Drawing**