


**H16,0/25,5X BL SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

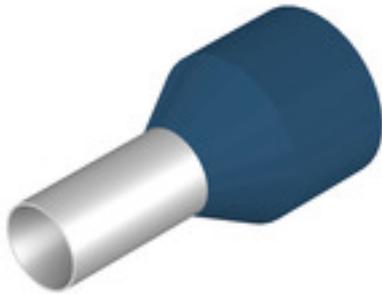

- Polypropylene conical cable entry
  - Heat-resistant up to 105°C
- for conductors from 1.5 to 16 mm<sup>2</sup> (AWG 16-6)  
tin-plated copper  
dimensional tolerances to DIN 46228 part 4

**General ordering data**

Version	Wire-end ferrule, insulated, 26 mm, 12 mm, blue
Order No.	<a href="#">9006870000</a>
Type	H16,0/25,5X BL SV
GTIN (EAN)	4008 190332327
Qty.	100 pc(s).
Packaging	Multipack bag

Creation date March 30, 2021 12:15:33 AM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**H16,0/25,5X BL SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 0.93 g

**Technical data**

Description of article	Wire end ferrule for short-circuit-proof and earth-fault-proof lines, blue	Version	insulated
------------------------	--	---------	-----------

**Wire-end ferrules**

Collar diameter (D2)	11.9 mm	Colour code	Weidmüller
Conductor cross-section	16 mm <sup>2</sup>	Contact surface diameter (D1)	6 mm
Contact surface length (L2)	12 mm	L1 in mm	25.5 mm
Metal sleeve thickness (S1)	0.2 mm	Plastic collar thickness (S2)	0.3 mm
Stripping length	26 mm	Wire connection cross section AWG, max.	AWG 6

**Classifications**

ETIM 6.0	EC000005	ETIM 7.0	EC000005
ECLASS 9.0	27-40-02-01	ECLASS 9.1	27-40-02-01
ECLASS 10.0	27-40-02-01	ECLASS 11.0	27-40-02-01

**Approvals**

Approvals



ROHS

Conform

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">Technical information - EN</a> <a href="#">Technical information - DE</a>

**Data sheet**

**H16,0/25,5X BL SV**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Drawing**

