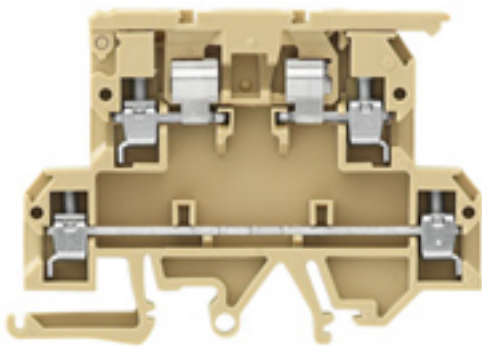


KDKS 1/EN4**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection, Direct mounting
Order No.	9503350000
Type	KDKS 1/EN4
GTIN (EAN)	4008190550806
Qty.	50 pc(s).

KDKS 1/EN4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	65 mm	Depth (inches)	2.559 inch
Height	73.5 mm	Height (inches)	2.894 inch
Net weight	21.66 g	Width	8 mm
Width (inches)	0.315 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, Fuse isolator, One end without connector	End cover plate required	Yes
Number of potentials	2	Number of levels	2
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35	N-function	No
PE function	No	PEN function	No

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	1 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 mm ²
Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm ²	Wire cross-section, finely stranded, two clampable wires, max.	1 mm ²

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	12400-281	Current size D (CSA)	10 A
Voltage size D (CSA)	300 V	Wire cross section max. (CSA)	12 AWG
Wire cross section min. (CSA)	26 AWG		

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	4 mm ²		
---	-------------------	--	--

KDKS 1/EN4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm
Clamping range, min.	0.33 mm ²
Connection cross-section, stranded, max.	4 mm ²
Connection direction	on side
Number of connections	3
Tightening torque, max.	1 Nm
Torque level with DMS electric screwdriver	2
Wire connection cross section AWG, max.	AWG 12
Wire connection cross section, finely stranded, max.	4 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²
Wire connection cross-section, solid core, min.	0.5 mm ²

Clamping range, max.	4 mm ²
Clamping screw	M 3
Connection cross-section, stranded, min.	1.5 mm ²
Gauge to IEC 60947-1	A3
Stripping length	9 mm
Tightening torque, min.	0.5 Nm
Type of connection	Screw connection
Wire connection cross section AWG, min.	AWG 22
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm ²
Wire connection cross-section, solid core, max.	4 mm ²

Fuse terminals

Cartridge fuse	G-Si. 5 x 20
----------------	--------------

General

Installation advice	Direct mounting	Rail	TS 35
Standards	IEC 60947-7-1 (-7-2)	Wire connection cross section AWG, max.	AWG 12
Wire connection cross section AWG, min.	AWG 22		

PE rating data

PEN function	No
--------------	----

Rating data

Power loss in accordance with IEC 60947-7-x	1.02 W	Rated cross-section	4 mm ²
Rated voltage	500 V	Rated current	6.3 A
Current at maximum wires	6.3 A	Standards	IEC 60947-7-1 (-7-2)
Volume resistance according to IEC 60947-7-x	1 mΩ	Rated impulse withstand voltage	6 kV
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG	Current size C (UR)	10 A
UL_current_Print	10 A	UL_voltage_Print	300 V
UL_wire_max_Print	12 AWG	UL_wire_min_Print	26 AWG
Voltage size C (UR)	300 V		

KDKS 1/EN4**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Classifications**

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ECLASS 9.0	27-14-11-16	ECLASS 9.1	27-14-11-16
ECLASS 10.0	27-14-11-16	ECLASS 11.0	27-14-11-16

Approvals

Approvals



ROHS	Conform
UL File Number Search	E60693

Downloads

Approval/Certificate/Document of Conformity	EAC certificate Declaration of Conformity
Engineering Data	EPLAN, WSCAD
User Documentation	StorageConditionsTerminalBlocks