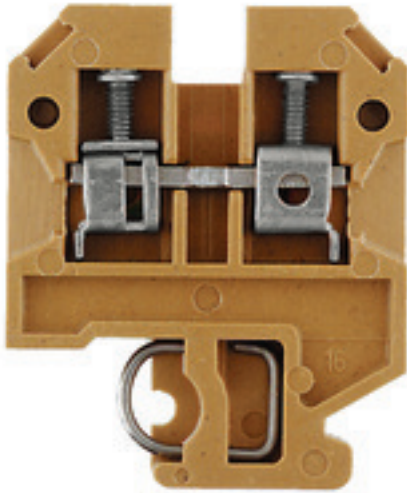


SAK 2.5 K.IN KRG**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Order No.	9520310000
Type	SAK 2.5 K.IN KRG
GTIN (EAN)	4008190460105
Qty.	100 pc(s).
Delivery status	Discontinued
Available until	2020-12-31
Alternative product	0279660000

Creation date March 30, 2021 3:16:43 AM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAK 2.5 K.IN KRG

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	46.5 mm	Depth (inches)	1.831 inch
Height	36.5 mm	Height (inches)	1.437 inch
Net weight	10.15 g	Width	6 mm
Width (inches)	0.236 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	Screw connection, for screwable cross-connection, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 32	N-function	No
PE function	No	PEN function	No

Conductors for clamping (rated connection)

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

General

Rail	TS 32
------	-------

Rating data

Power loss in accordance with IEC 60947-7-x	0.77 W	Rated cross-section	2.5 mm ²
Rated voltage	800 V	Rated current	24 A
Volume resistance according to IEC 60947-7-x	1.33 mΩ		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20

SAK 2.5 K.IN KRG

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of
Conformity

[EAC certificate](#)

User Documentation

[StorageConditionsTerminalBlocks](#)