

SPECIAL PAINTING on request


OUTDOOR STANDARD C4
acc ISO 12944 – 290330
2 x Primer coat (50 µm) EPOXY
1 x Final coat (60 µm) POLYURETHANE

OUTDOOR C5M
acc ISO 12944 – 289872
3 x Primer coat (80 µm) EPOXY
1 x Final coat (40 µm) POLYURETHANE

RAL on request


APPLICATIONS WITH COMPRESSED AIR PRESSURE

Use IS version (FRM 10XXX)
as a proportional regulator

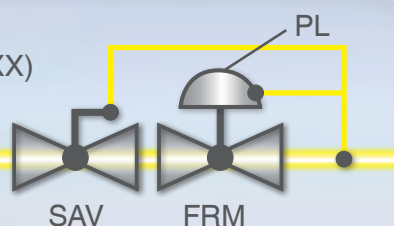

MARINE VERSION

SPECIAL BODY AND SAV
without external aluminium
material

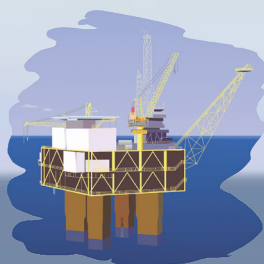

BIOGAS VERSION

All internal parts needed with special nickel
treatment (AVAILABLE FOR DN 65/DN 80 sizes)

H2 - HYDROGEN VERSION

Under development


WWW.DUNGS.COM
Edition 2020/07 • Marketing

FRM

Medium Pressure Regulator

CE

EAC

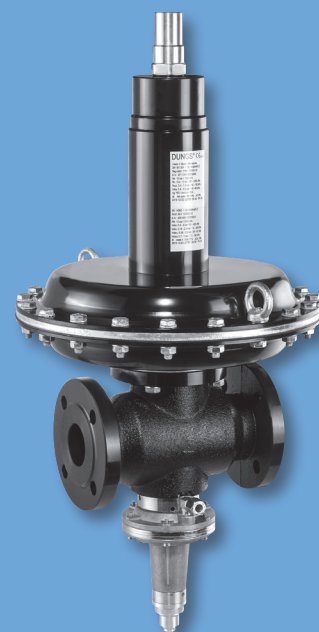

DN 25
DN 40
DN 50
DN 65
DN 80

PN 25 or
ANSI 150 lbs

USA Version

Including special fittings NPT thread,
Impulse connection for ½ pipe

EXTERNAL IMPULSE

INTERNAL IMPULSE
available for DN 65/80
Makes regulator faster

ND, MD, HD, UHD versions

Outlet pressure from 30 to 4 000 mbar

SAV (safety shut-off valve as option)

Inlet pressure up to 25 bar

**CRN (CANADA)
APPROVAL ON-GOING**


Suitable for ATEX applications

Approvals
EN 334, EN 14382



DAMPING NOZZLE KIT - 270712

To modify oscillation range and
response speed
8 different orifices:
1,5/1,7/1,9
2,1/2,3/2,5
3,0/9,0 mm

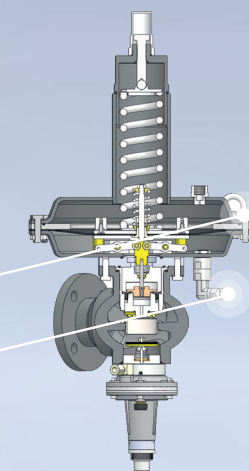


Vent line

Impulse line

SPECIAL DIFFUSER

Under development
For low flow rates

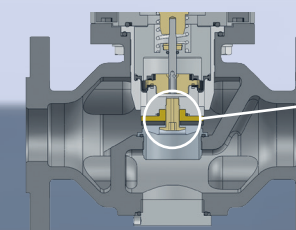


SWITCH FOR SAV

Two Options depending
on model:




288378 LIMIT SWITCH
(ATEX II 2GD Ex d IIC.)

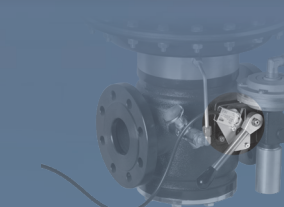

288375 PROXIMITY SWITCH
(ATEX II 1GD Ex ia IIC.)

OUTDOOR CAP - 277942

Repl. Kit Vent cap
FRM G ½ outdoor



SILENCER

Under development