


FRM

Medium Pressure Regulator

DUNGS®
Combustion Controls

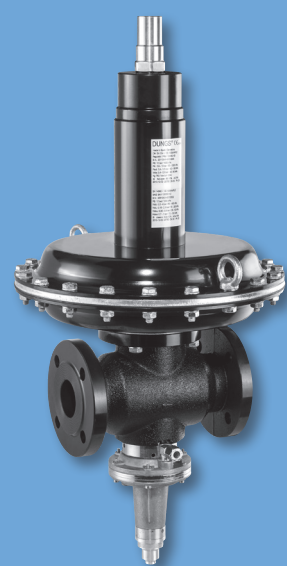

CE

EAC

DN 25
DN 40
DN 50
DN 65
DN 80

PN 25 or
ANSI 150 lbs

USA Version

Including special fittings NPT thread,
Impulse connection for ½ pipe

EXTERNAL IMPULSE

INTERNAL IMPULSE
available for DN 65/80
Makes regulator faster



CRN (CANADA)
APPROVAL ON-GOING

ND, MD, HD, UHD versions
Outlet pressure from 30 to 4 000 mbar

Suitable for ATEX applications

SAV (safety shut-off valve as option)

Approvals
EN 334, EN 14382

Inlet pressure up to 25 bar

SILENCER


Under development

MARINE VERSION



SPECIAL BODY AND SAV
without external aluminium material

APPLICATIONS WITH COMPRESSED AIR PRESSURE

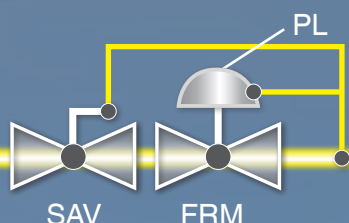

Use IS version (FRM 10XXX)
as a proportional regulator

H2 - HYDROGEN VERSION

Under development

SPECIAL PAINTING on request

OUTDOOR STANDARD C4
acc ISO 12944 – 290330
2 x Primer coat (50 µm) EPOXY
1 x Final coat (60 µm) POLYURETHANE


OUTDOOR C5M
acc ISO 12944 – 289872
3 x Primer coat (80 µm) EPOXY
1 x Final coat (40 µm) POLYURETHANE

RAL on request




SPECIAL DIFFUSER

Under development
For low flow rates

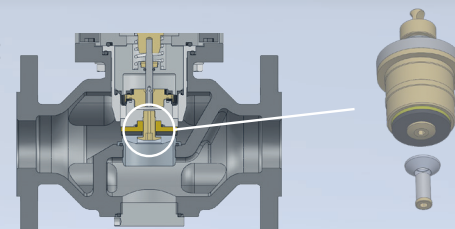

OUTDOOR CAP - 277942

Repl. Kit Vent cap
FRM G ½ outdoor




BIOGAS VERSION

All internal parts needed with special nickel
treatment (AVAILABLE FOR DN 65/DN 80 sizes)

DAMPING NOZZLE KIT - 270712

To modify oscillation range
and response speed
8 different orifices:
1,5/1,7/1,9
2,1/2,3/2,5
3,0/9,0 mm

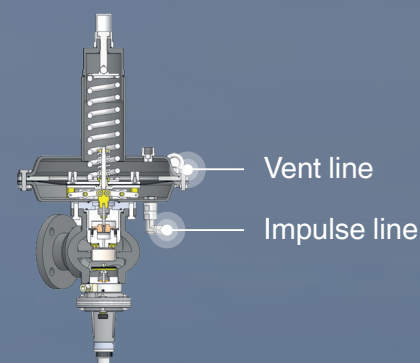

SWITCH FOR SAV

Two Options depending
on model:



288378 LIMIT SWITCH
(ATEX II 2GD Ex d IIC.)



288375 PROXIMITY SWITCH
(ATEX II 1GD Ex ia IIC.)