XMLB010C2C11

pressure switch XMLB 10 bar - adjustable scale 2 thresholds - 1 C/O



Main Range of product Telemecanique Pressure sensors XM Product or component Electromechanical pressure sensor type Pressure sensor type Electromechanical pressure sensor Device short name **XMLB** 10 bar Pressure rating Corrosive fluid (0...160 °C) Controlled fluid Fluid connection type G 1/4 (female) conforming to ISO 228 Electrical connection 1 male connector EN 175301-803-A (ex DIN43650), 4 pins Contacts type and 1 C/O composition Product specific application Regulation between 2 thresholds Pressure switch type of operation Electrical circuit type Control circuit Scale type Adjustable differential Local display With Adjustable range of 0.7...10 bar switching point on rising pressure Adjustable range of 0.13...9.15 bar switching point on falling pressure Possible differential 7.5 bar maximum at high setting Maximum permissible 22.5 bar accidental pressure

45 bar

PTFE

Diaphragm

Zinc alloy

60947-5-1

60947-5-1

60947-5-1

316L stainless steel

3 A, B300, AC-15 (Ue = 120 V) conforming to IEC

1.5 A, B300, AC-15 (Ue = 240 V) conforming to IEC

0.1 A, R300, DC-13 (Ue = 250 V) conforming to IEC

Complementary

Auxiliary contacts operation	Snap action	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1	
	300 V conforming to CSA C22.2 No 14	
[-]	500 V conforming to IEC 60947-1	
[Ui] rated insulation voltage	300 V conforming to UL 508	
Repeat accuracy	2 %	
Maximum operating rate	120 cyc/mn	
Terminal block type	4 terminals	
Maximum permissible pressure - per cycle	12.5 bar	
Possible differential minimum at high setting	0.85 bar (- 0.1 bar, + 0.15 bar)	
Possible differential minimum at low setting	0.57 bar (+/- 0.05 bar)	

Destruction pressure

Materials in contact with

Pressure actuator

Enclosure material

[In] rated current

fluid

Contacts material	Silver contacts	
Maximum resistance across terminals	25 MOhm conforming to IEC 255-7 category 3 25 mOhm conforming to NF C 93-050 method A	
Short-circuit protection	10 A cartridge fuse, type gG (gl)	
Mechanical durability	5000000 cycles	
Setting	External	
Height	113 mm	
Depth	75 mm	
Width	35 mm	
Net weight	0.735 kg	

Environment

Standards	CE UL 508 IEC 60947-5-1 CSA C22.2 No 14
Product certifications	LROS (Lloyds register of shipping) [RETURN]CSA[RETURN]CCC[RETURN]BV[RETURN]UL
Protective treatment	TC standard version
Ambient air temperature for operation	-2570 °C
Ambient air temperature for storage	-4070 °C
Operating position	Any position
Vibration resistance	4 gn conforming to IEC 60068-2-6 (f = 30500 Hz)
Shock resistance	50 gn conforming to IEC 60068-2-27
Electrical shock protection class	Class I conforming to IEC 1140 Class I conforming to IEC 536 Class I conforming to NF C 20-030
IP degree of protection	IP65 conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	14.5 cm	
Package 1 Width	6.2 cm	
Package 1 Length	8.2 cm	
Package 1 Weight	1050 g	

Offer Sustainability


Green Premium product
WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
sustainability@tesensors.com

Contractual warranty

<u></u>	
Warranty	18 months



Dimensions

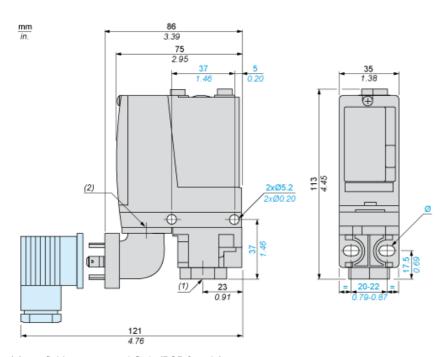

- 1 fluid entry, tapped G1/4 (BSP female) EN 175301-803-A connector
- Ø: 2 elongated holes Ø 5.2 x 6.7

Product data sheet Connections and Schema

XMLB010C2C11

Wiring Diagram

Terminal Model




Wiring Diagram

Vacuum Switch Connector Pin View




- (1) 11 and 13 (2) 12 (3) 14

Operating Curves

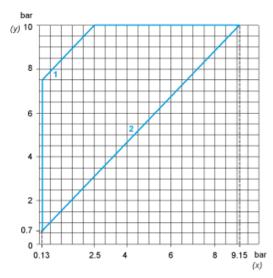

- Rising pressure Falling pressure (y) (x) 1:
- Maximum differential
- Minimum differential 2:



- Pressure (y)
- Time (x)
- Adjustable value
- (1) Adjustable PH: High point PB: Below point