



Main

Range of product	Advantys Telefast ABE7
Product or component type	Passive discrete I/O sub-base
[Us] rated supply voltage	24 V DC (sensor/controller side) 24 V DC (controller side)
Number of channels	20
Number of terminal per channel	2
Connections - terminals	Screw type terminals, clamping capacity: 2 x 0.2...2 x 2.5 mm ² AWG 28...16 solid Screw type terminals, clamping capacity: 2 x 0.09...2 x 0.75 mm ² AWG 28...20 flexible with cable end Screw type terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm ² AWG 26...14 flexible without cable end Screw type terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm ² AWG 26...12 solid Screw type terminals, clamping capacity: 1 x 0.09...1 x 1.5 mm ² AWG 28...16 flexible with cable end
Connector destination	Twido programmable controller

Complementary


Supply voltage limits	20.4...26.4 V DC (sensor/controller side) conforming to IEC 61131-2 19...30 V DC (controller side) conforming to IEC 61131-2
Discrete input number	12
Discrete input logic	Sink
Discrete output number	8
Discrete output voltage	24 V
Discrete output voltage type	DC
Product compatibility	TWDLMDA20DTK TWDLMDA40DTK
Status LED	1 LED per channel for channel status 1 LED for power ON
Polarity distribution	1 common/8 channels for output 1 common/12 channels for input
Short circuit protection	0.315 A fuse per channel, 5 x 20 mm, fast blow (output circuit) 2 A internal fuse, 5 x 20 mm, fast blow (controller side)
Connector type	HE-10
Pin number	26 pins
Fixing mode	By screws By clips on 35 mm symmetrical DIN rail conforming to IEC 60715
Supply current	<= 2 A
Current per channel	0.0032 A
Switched current	300 mA for output circuit 15 mA for input circuit
Current per output common	2 A
Voltage drop on power supply fuse	0.3 V
[Ui] rated insulation voltage	2000 V between terminals/mounting rails
Overvoltage category	II conforming to IEC 60664-1
Tightening torque	0.6 N.m (with flat Ø 3.5 mm)
Product weight	0.43 kg

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Environment

Standards	IEC 61131-2 Type 1
Product certifications	CSA UL
IP degree of protection	IP2x conforming to IEC 60529
Resistance to incandescent wire	750 °C conforming to IEC 60695-2-11
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	2 gn (f = 10...150 Hz) conforming to IEC 60068-2-6
Resistance to electrostatic discharge	8 kV (air) conforming to IEC 61000-4-2 level 3 4 kV (contact) conforming to IEC 61000-4-2 level 3
Resistance to radiated fields	10 V/m (80000000...2000000000 Hz) conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Ambient air temperature for operation	-5...60 °C conforming to IEC 61131-2
Ambient air temperature for storage	-40...80 °C conforming to IEC 61131-2
Pollution degree	2 conforming to IEC 60664-1


Dimensions

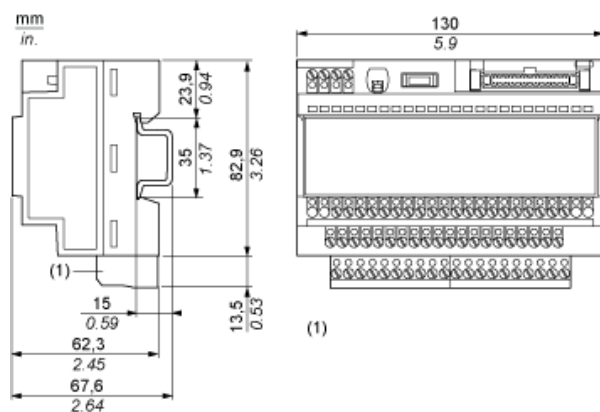


Mounting

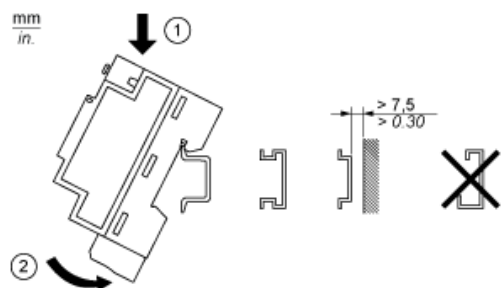

HE10 20 Channels

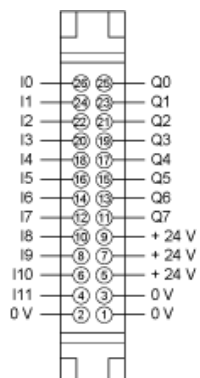


Wiring Diagram

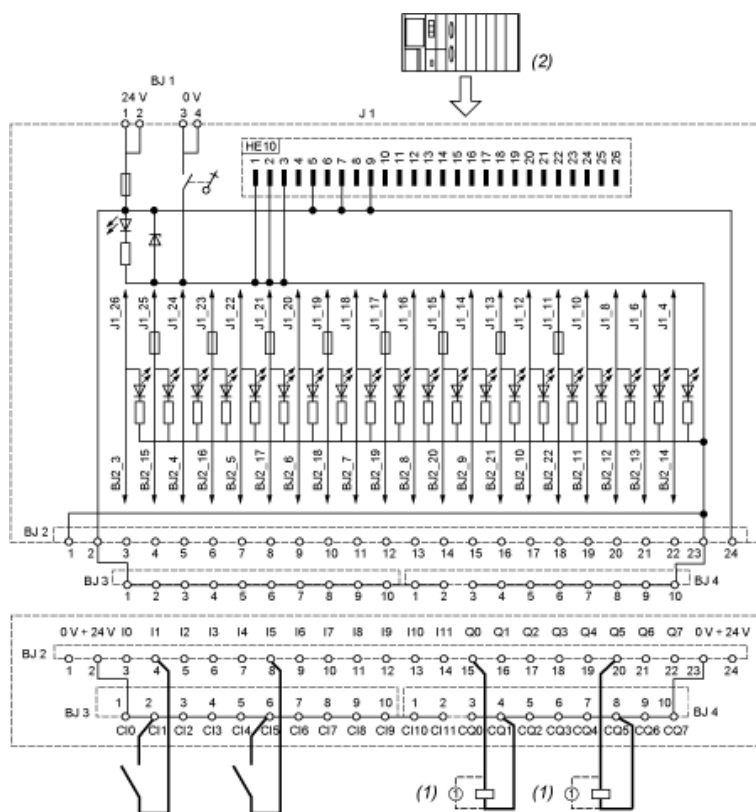

- (1) Inductive load
- (2) Input sink

Curves for Determining Cable Type and Length According to the Current

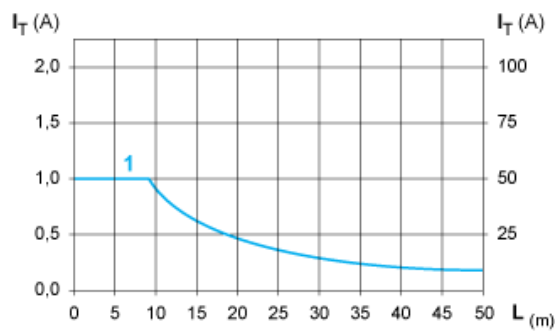

L Cable length

I_T Total current per sub base (A)

I_A Average current per channel (mA)

(1) Cables ABFT2••••• c.s.a. 0.08 mm^2 (AWG 28)

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.