


ABS7SC1B

plug-in solid state relay - 5 mm - output - 24 V
DC - 2 A


Complementary

Response time	<= 0.4 ms from state 1 to 0 <= 0.01 ms from state 0 to 1
Product compatibility	ABE7P16M111 ABE7P16T111 ABE7R16T111

Internal Wiring Diagram

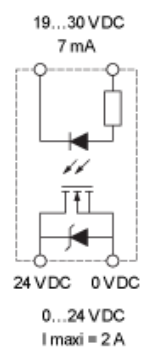

Temperature Derating Curves

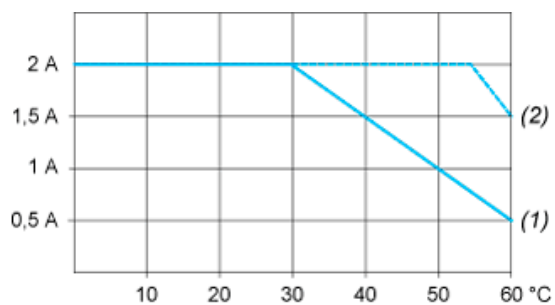

- (1) 100 % of channels used
(2) 50 % of channels used