




AS-Interface diagnosis module

AS-i Tuner IP67

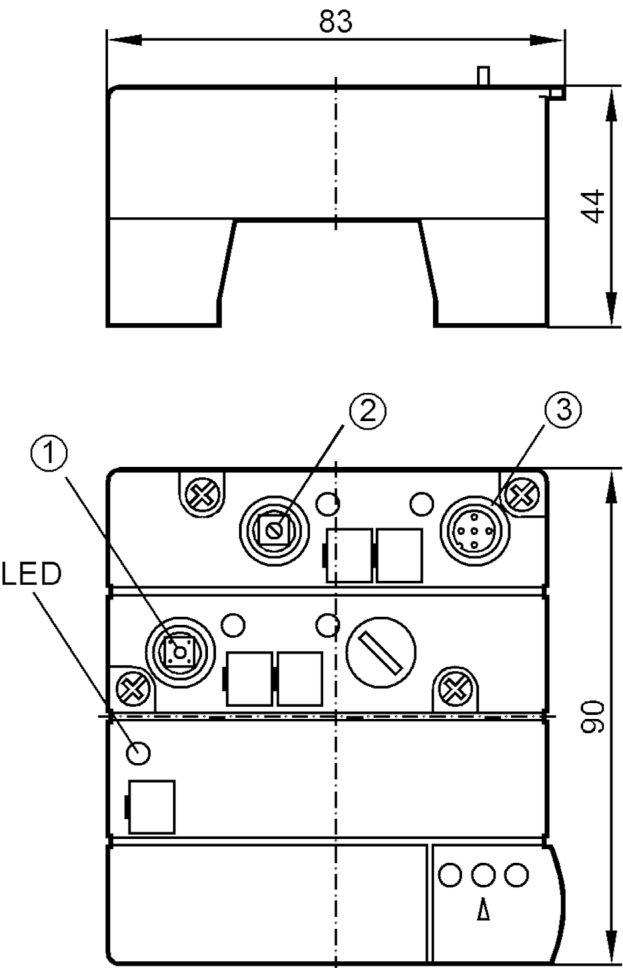

- 1 tune button
- 2 rotary switch
- 3 AS-i distribution socket M12



Application		
Application		diagnostic tool for AS-i
Electrical data		
Nominal voltage DC	[V]	26.5...31.6
Max. current consumption from AS-i	[mA]	60
Reverse polarity protection		yes
Undervoltage monitoring		yes
Operating conditions		
Ambient temperature	[°C]	0...55
Protection		IP 67
Tests / approvals		
MTTF	[years]	140
AS-i classification		
AS-i certificate pending		yes

AC1146



AS-Interface diagnosis module

AS-i Tuner IP67

Mechanical data		
Weight	[g]	196.5
Materials		PBT
Displays / operating elements		
Display	operation	LED, green
	warning	LED, yellow
	errors	LED, red
Accessories		
Accessories (optional)		Module lower part, AC5000
Remarks		
Remarks	no addressing required	
	current rating of the AS-i distribution socket max. 1 A	
Pack quantity		1 pcs.
Electrical connection		
contact pins to module lower part, FK:		
AS-i distribution socket M12		
1	AS-i +	
3	AS-i -	
Connector: M12		
