


AS-i RS485 gateway

AS-i / RS-485 Gateway



- 1 addressing plug
- 2 LED

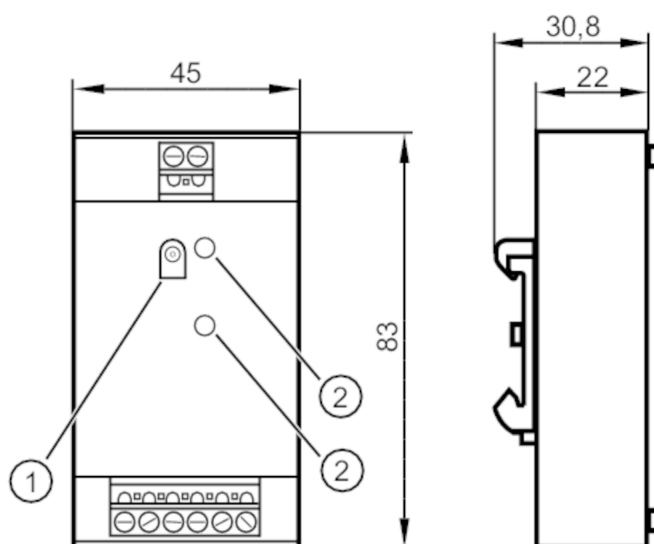

Electrical data

Operating voltage	[V]	19.5...31.6 DC
Max. current consumption from AS-i	[mA]	100
Reverse polarity protection		yes

Operating conditions

Ambient temperature	[°C]	0...60
Protection		IP 30

Tests / approvals

EMC	IEC 62026-2	
-----	-------------	--

AS-i classification

AS-i version		3.0
Extended addressing mode possible		yes
AS-i profile		S-B.A.5
AS-i I/O configuration	[hex]	B
AS-i ID code	[hex]	A.5
AS-i certificate pending		yes

Mechanical data

Weight	[g]	869
Type of mounting		mounting on DIN rail
Dimensions	[mm]	83 x 22 x 45
Materials		PBT

AC1155



AS-i RS485 gateway

AS-i / RS-485 Gateway

Displays / operating elements		
Display	operation	LED, green
	short circuit	LED, red
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
A+	AS-i +	
A-	AS-i -	
B	(CTS)	
A	(RTS)	
GND		
GND	not used	
TxD	not used	
RxD	not used	