




AS-Interface illuminated pushbutton module

EMS Module 2BI 2LO

Status Archive

AC2086

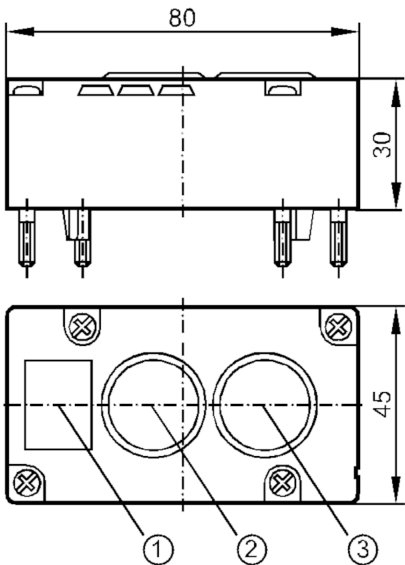

- 1 panel for labelling
- 2 pushbutton / LED
- 3 pushbutton / LED



Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	55
Inputs		
Sensor supply of the inputs		AS-i
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC	EN 50295	
MTTF	[years]	1661



AS-Interface illuminated pushbutton module

EMS Module 2BI 2LO

AS-i classification					
AS-i version	2.1				
Extended addressing mode possible	no				
AS-i profile	S-3.F.F				
AS-i I/O configuration [hex]	3				
AS-i ID code [hex]	F.F				
AS-i certificate	04801				
Assignment of the data bits	data bit	D0	D1	D2	D3
	pushbutton	2	1	-	-
	LED	-	-	2	1
Mechanical data					
Weight [g]	100.6				
Type of mounting	AS-i interface to FC and SC lower parts				
Materials	PBT				
Displays / operating elements					
Display	pushbutton			2 LED, white	
Accessories					
Accessories (supplied)	cover support: 2				
	colour inserts: 2, red				
	2, green				
	2, yellow				
	2, blue				
	2, white				
Remarks					
Remarks	The pushbuttons (EAO type 84) provide protection against accidental contact.				
Notes	Housing and pushbuttons can be labelled.				
Pack quantity	discontinued article				
	1 pcs.				
Electrical connection					
contact pins to module lower part, FK / PG:					

Status Archive

AC2086