


AC2211



AS-Interface insulation monitor

Earth Fault Monitoring Device

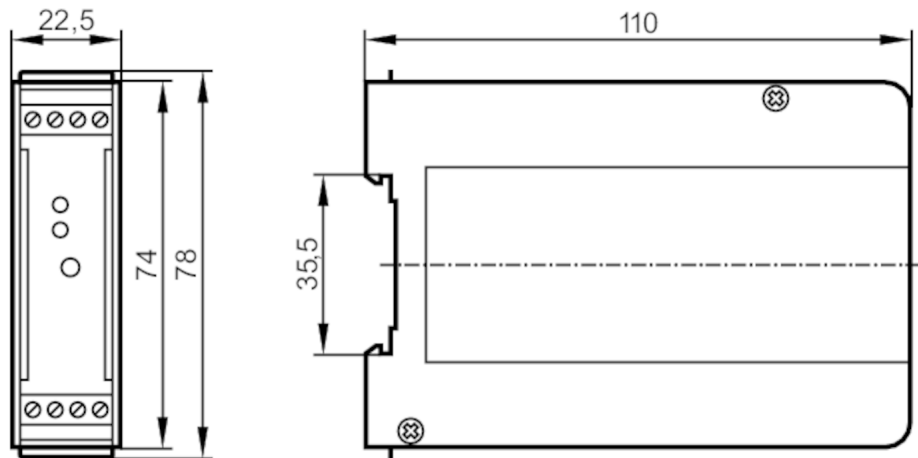

Application

Application	detection of asymmetric insulation faults; earth fault monitoring in unearthed AS-i and 24 V DC systems (IT system)
-------------	---

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Nominal voltage DC	[V]	21...36
Max. current consumption from AS-i	[mA]	40

Outputs

Contact rating	1A AC/DC
----------------	----------

Operating conditions

Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...70
Protection		IP 20

Tests / approvals

EMC	EN 50081-1 EN 61000-6-2	
MTTF	[years]	233

AS-i classification

AS-i certificate	19801
------------------	-------

Mechanical data

Weight	[g]	181
Housing		mounting on DIN rail and panel

Displays / operating elements

Display	operation	LED, green
	function	LED, yellow

AC2211



AS-Interface insulation monitor

Earth Fault Monitoring Device

Remarks	
Remarks	Passives unsymmetrisches Messverfahren.
	1 Meldekontakt
	Kontakt 11/14 löst bei unsymmetrischen Fehlern aus.
	Kontakt geschlossen wenn AS-i Spannung anliegt und kein Erdschluss vorliegt.
Pack quantity	1 pcs.
Electrical connection	
Connection	

