




AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO RD/GR

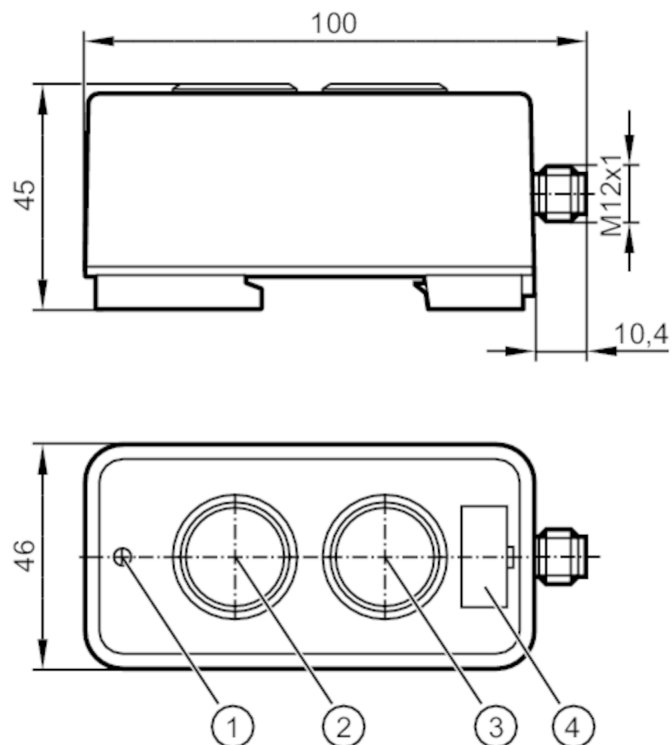

- 1 LED
- 2 pushbutton 2 / LED 2
- 3 pushbutton 1 / LED 1
- 4 panel for labelling



Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	55
Inputs		
Sensor supply of the inputs		AS-i
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...85
Protection		IP 67
Tests / approvals		
EMC	EN 61000-6-2	
	EN 62026-2	



AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO RD/GR

AS-i classification						
AS-i version		2.1+3.0				
Extended addressing mode possible		yes				
AS-i profile		S-7.A.E				
AS-i I/O configuration [hex]		7				
AS-i ID code [hex]		A.E				
AS-i certificate		133801				
Assignment of the data bits		data bit	D0	D1	D2	D3
		LED 1	DO-0	-	-	-
		LED 2	-	DO-1	-	-
		pushbutton 1	DI-0	-	-	-
		pushbutton 2	-	DI-1	-	-
Mechanical data						
Weight [g]		132.8				
Type of mounting		mounting on DIN rail				
Materials		PA				
Displays / operating elements						
Display		operation		LED, green		
		errors		LED, red		
		pushbutton		2 LED		
Remarks						
Pack quantity		1 pcs.				
Electrical connection						

- 1 AS-i +
3 AS-i -

