


AS-Interface CompactLine module

CompactModule 4 SB

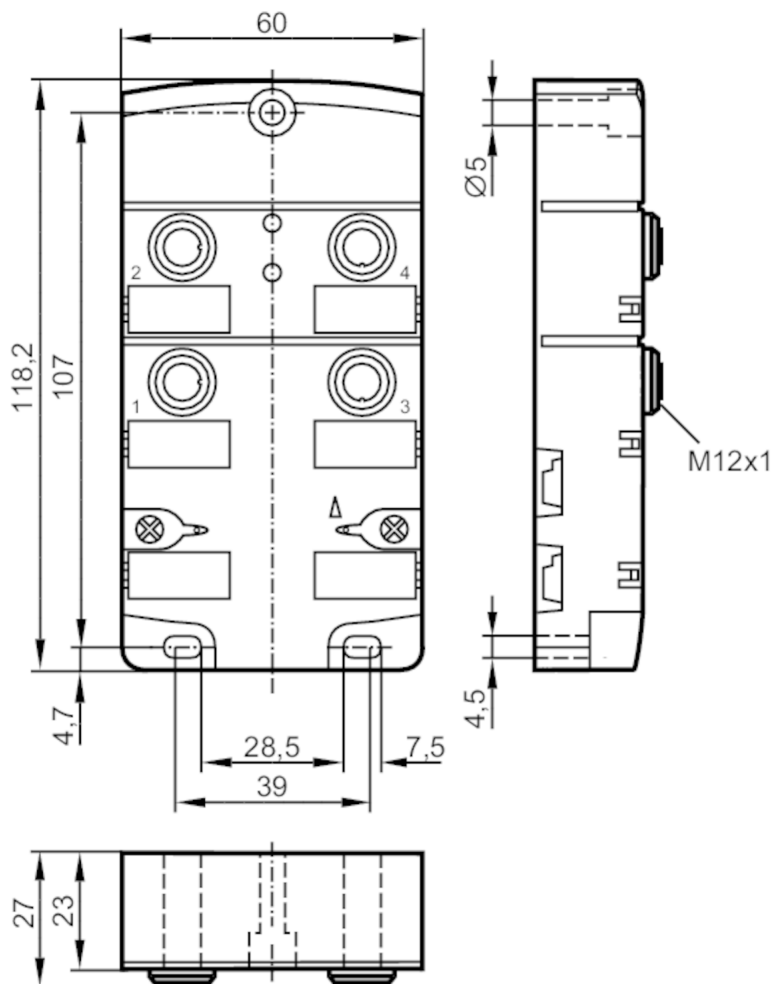

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
-------------------	-----	---

Max. current load total	[A]	4
-------------------------	-----	---

Operating conditions

Ambient temperature	[°C]	-25...80
---------------------	------	----------

Protection	IP 67; ("enclosure type 1" according to cULus; when flat cables are used E7400x / E7401x)
------------	---

Tests / approvals

EMC	EN 50295
-----	----------

Mechanical data

Weight	[g]	272.5
--------	-----	-------

Type of mounting	AS-i flat cables directly connectable
------------------	---------------------------------------

Materials	PA 6.6; socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: FKM; piercing contacts: CuSn6 nickel-plated and tin-plated;
-----------	---

Accessories

Accessories (optional)	Stainless steel sleeve, for installation in case of high mechanical stress , E70402
------------------------	---

AC2413



AS-Interface CompactLine module

CompactModule 4 SB

Remarks	
---------	--

Pack quantity	1 pcs.
---------------	--------

Electrical connection	
-----------------------	--

- | | |
|---|-----------------------|
| 1 | AS-i + |
| 2 | external voltage - |
| 3 | AS-i - |
| 4 | external voltage + |
| 5 | protective earth (FE) |

Connector: M12

