




AS-Interface CompactLine module

CompactM12 4 SB V4A

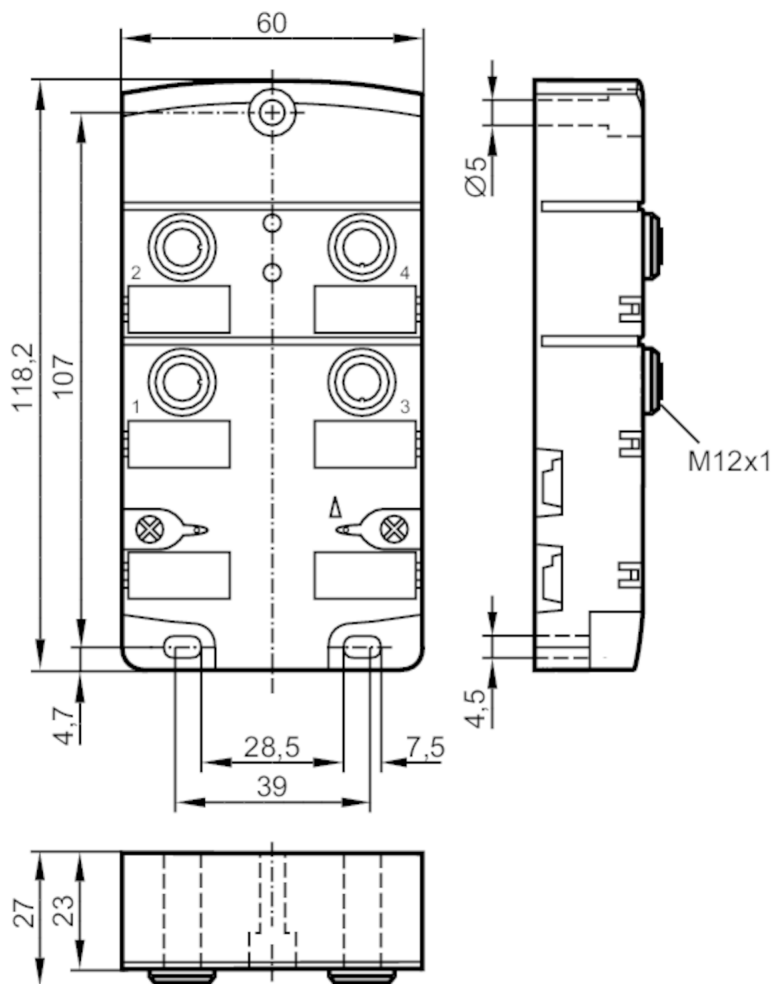

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67; (when flat cables are used E7400x / E7401x)

Tests / approvals

EMC	EN 50295
-----	----------

Mechanical data

Weight	[g]	271
Type of mounting		AS-i flat cables directly connectable
Materials		PA 6.6; socket: stainless steel (1.4404 / 316L); threaded inserts in the lower part: stainless steel (1.4404 / 316L); O-ring: EPDM; piercing contacts: CuSn6 nickel-plated and tin-plated; screws stainless steel (1.4578 / 316Cu);

Accessories

Accessories (optional)	Stainless steel sleeve, for installation in case of high mechanical stress , E70402
------------------------	---

AC2453



AS-Interface CompactLine module

CompactM12 4 SB V4A

Remarks	
---------	--

Pack quantity	1 pcs.
---------------	--------

Electrical connection	
-----------------------	--

- | | |
|---|-----------------------|
| 1 | AS-i + |
| 2 | external voltage - |
| 3 | AS-i - |
| 4 | external voltage + |
| 5 | protective earth (FE) |

Connector: M12

