




AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

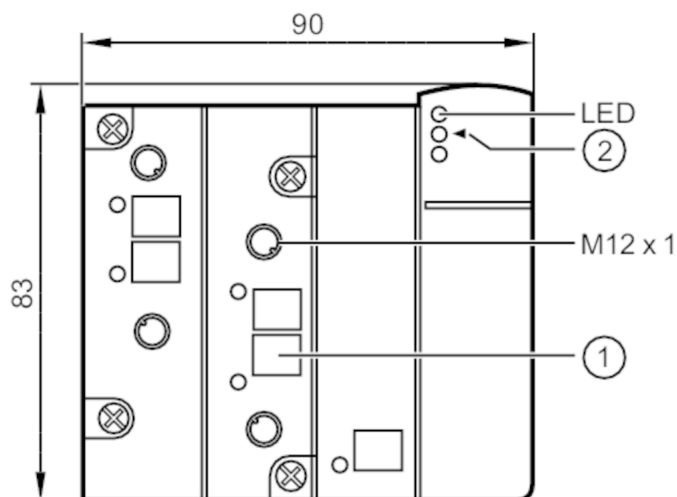

- 1 panel for labelling
2 fixture infrared adapter



Electrical data

Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	130...180; (external supply)
Max. current consumption from AS-i	[mA]	180; (with external supply: 50 mA)
Reverse polarity protection		yes
Additional voltage supply	[V]	24 DC

Outputs

Voltage range DC		24; (to PELV)
Number of analogue outputs		4; (Anschluss von 2-Draht-Aktuatoren)
Analogue current output	[mA]	0...20
Max. load	[Ω]	600
Short-circuit proof		yes
Resolution of analogue output		16 (1 bit = 1 µA)
Actuator supply analogue outputs		AS-i/external

Operating conditions

Ambient temperature	[°C]	0...70
Storage temperature	[°C]	-20...85
Protection		IP 67

Tests / approvals

EMC	EN 50295	
	EN 61000-6-4	: 2001
	EN 61000-6-2	: 2001
MTTF	[years]	135



AS-Interface ClassicLine module

ClassicLineVA 4AO (C) M12 IP67

AS-i classification	
AS-i addressing	via IR addressing interface or via addressing socket in the lower part ; IR addressing possible
AS-i profile	S-7.3.6
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	3.6
AS-i certificate pending	yes

Mechanical data	
Weight [g]	219.6
Type of mounting	AS-i interface to FC/FC-E lower parts
Materials	PBT; Sealing: FKM; screws: stainless steel

Displays / operating elements		
Display	operation	LED, green Voltage AS-i / 24 V AUX
	errors	LED, red
	function	LED, yellow channels AO1...AO4

Accessories	
Accessories (optional)	Module lower part

Remarks	
Pack quantity	1 pcs.

Electrical connection	
-----------------------	--

- | | |
|---|------------------------|
| 1 | AO+ analogue output |
| 2 | n.c. |
| 3 | AO- analogue output 0V |
| 4 | n.c. |
| 5 | functional earth |

Connector: M12

