


AC2900



AS-Interface ProcessLine module

ProcessLine 8 SB IP69K

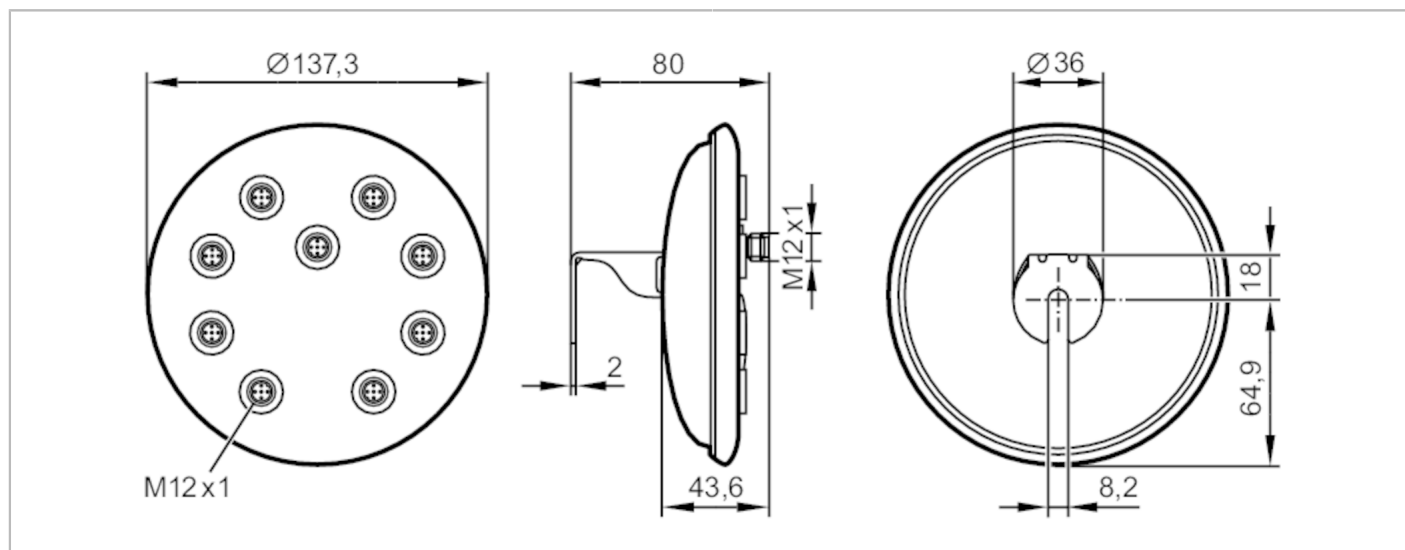

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Max. current load total	[A]	4

Inputs

voltage supply	[V]	20...30
----------------	-----	---------

Outputs

Voltage range DC		to PELV
Max. current load per output	[mA]	4000

Operating conditions

Ambient temperature	[°C]	-5...70
Protection		IP 68; IP 69K

Tests / approvals

EMC	EN 50295	
-----	----------	--

AS-i classification

AS-i certificate pending		yes
--------------------------	--	-----

Mechanical data

Weight	[g]	605
Dimensions	[mm]	137.3 x 80 x 137.3
Materials		stainless steel; PC

Accessories

Accessories (supplied)		Protective cap: M12, E70297
Accessories (optional)		Torque wrench, E70390

Remarks

Pack quantity		1 pcs.
---------------	--	--------



AS-Interface ProcessLine module

ProcessLine 8 SB IP69K

Electrical connection - plug

1	AS-i+
2	0 V
3	AS-i -
4	+24 V
5	functional earth

Connector: M12

