




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SB IP67

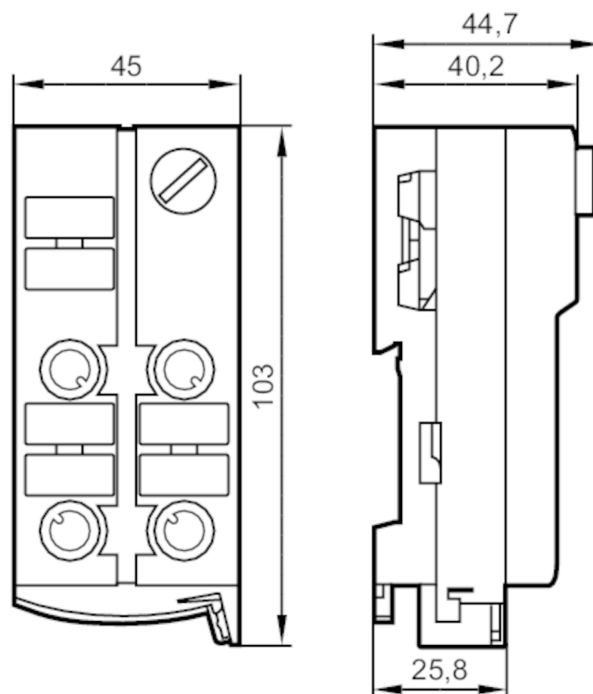

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Max. current load total	[A]	2

Inputs

voltage supply	[V]	15...24
----------------	-----	---------

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals

EMC		EN 50295
		IEC 61000-6-2
MTTF	[years]	10284

Mechanical data

Weight	[g]	152
Type of mounting		AS-i flat cables directly connectable
Materials		PA; piercing contacts: CuSn6 nickel-plated and tin-plated;

Accessories

Accessories (supplied)	lower part
Accessories (optional)	Protective cap: M12, E73004

Remarks

Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SB IP67

Electrical connection

quick mounting technology for AS-i flat cable: ; three orientations possible

1	AS-i +
2	external voltage -
3	AS-i -
4	external voltage +

Connector: M12

