




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

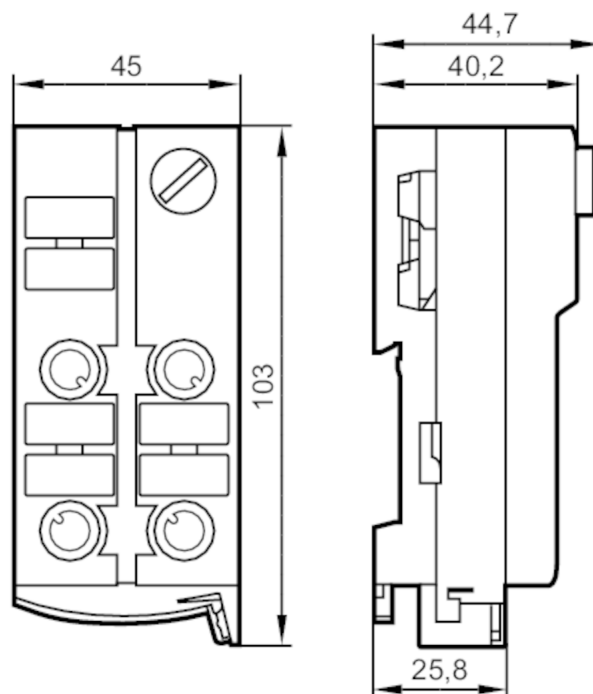

Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i	[mA]	50
Max. current load total	[A]	2
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 4
------------------------------	------------------------------

Outputs

Number of digital outputs	4
Beschaltung	PNP
Voltage range DC	15...30; (to PELV; via flat cable)
Max. current load per output	[mA] 1000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Short-circuit proof	yes
Electrically separated	yes

Operating conditions

Ambient temperature	[°C] -25...70
Protection	IP 67

Tests / approvals

EMC	EN 50295	
	IEC 61000-6-2	
MTTF	[years]	211



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

AS-i classification						
AS-i version		2.11 + 3.0				
AS-i addressing		addressing socket				
Extended addressing mode possible		no				
AS-i profile		S-8.0.E				
AS-i I/O configuration [hex]		8				
AS-i ID code [hex]		0.E				
AS-i certificate pending		yes				
Assignment of the data bits		data bit	D0	D1	D2	D3
		Output	1	2	3	4
		socket	O-1/2	O1/2 O-2	O-3/4	O-3/4 O-4
		pin	4	2 4	4	2 4
Mechanical data						
Weight [g]		181.4				
Type of mounting		AS-i flat cables directly connectable				
Materials		PA; piercing contacts: CuSn6 nickel-plated and tin-plated;				
Displays / operating elements						
Display		operation		LED, green		
		errors		LED, red		
		function		LED, yellow		
Accessories						
Accessories (supplied)		lower part				
Accessories (optional)		Protective cap: M12, E73004				
Remarks						
Pack quantity		1 pcs.				




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

Electrical connection

quick mounting technology for AS-i flat cable: ; three orientations possible

Connection

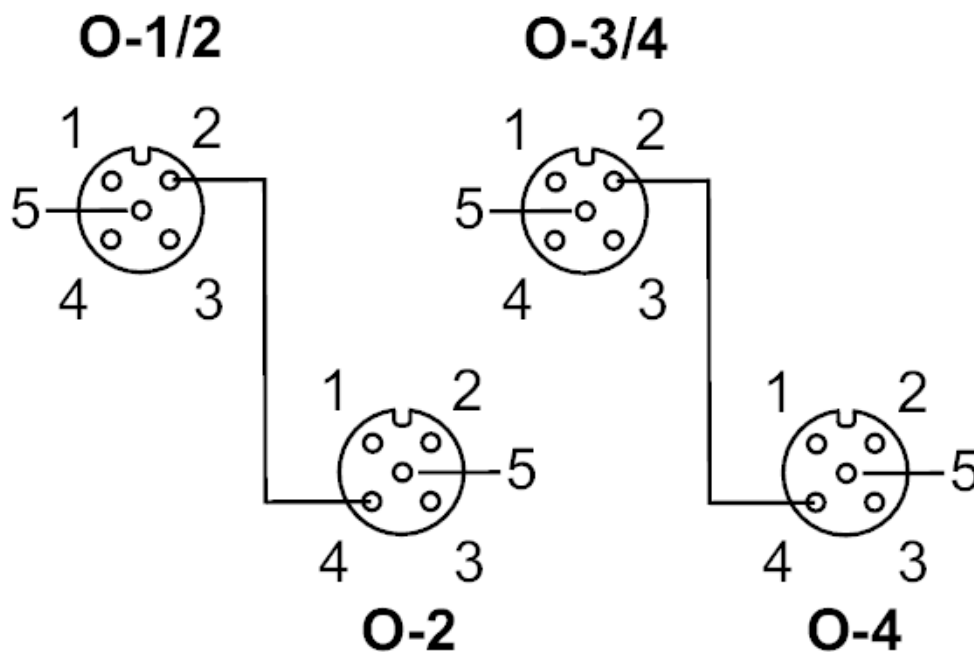



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DO-Y IP67

Outputs	
socket O-1/2	
1	not used
2	switching output 2
3	external voltage AUX -
4	switching output 1
5	not used
socket O-2	
1	not used
2	not used
3	external voltage AUX -
4	switching output 2
5	not used
socket O-3/4	
1	not used
2	switching output 4
3	external voltage AUX -
4	switching output 3
5	not used
socket O-4	
1	not used
2	not used
3	external voltage AUX -
4	switching output 4
5	not used

Connector: M12