



AS-Interface ClassicLine module with quick mounting technology

ClassicL 2DO-Y 2DI-Y 2A IP67



Electrical data

Operating voltage	[V]	26.5...31.6 DC; ("supply class 2" to cULus)
Max. current consumption from AS-i	[mA]	150
Max. current load total	[A]	4
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 2
------------------------------	---

Inputs

Number of digital inputs		2
Input circuit of digital inputs		PNP
voltage supply	[V]	18...30; (via flat cable)
Max. total current rating of inputs	[mA]	100
Input current High	[mA]	6...10
Input current Low	[mA]	0...2
Min. switching level high signal	[V]	11
Digital inputs protected against short circuits		yes
Sensor supply of the inputs		AS-i



AS-Interface ClassicLine module with quick mounting technology

ClassicL 2DO-Y 2DI-Y 2A IP67

Outputs						
Number of digital outputs		2				
Beschaltung		PNP				
Voltage range DC		15...30; (to PELV; via flat cable)				
Max. current load per output [mA]		2000; (utilisation category DC-13 (control of electromagnets): 40 W (IEC 60947-5-1))				
Short-circuit proof		yes				
Electrically separated		yes				
Operating conditions						
Ambient temperature [°C]		-25...70				
Protection		IP 67				
Tests / approvals						
EMC		EN 50295				
		IEC 61000-6-2				
AS-i classification						
AS-i version		2.11 + 3.0				
AS-i addressing		addressing socket				
Extended addressing mode possible		yes				
AS-i profile		S-B.A.E				
AS-i I/O configuration [hex]		B				
AS-i ID code [hex]		A.E				
AS-i certificate pending		yes				
Assignment of the data bits		data bit	D0	D1	D2	D3
		input	-	-	3	4
		socket	-	-	I-3/4	I-3/4 I-4
		pin	-	-	4	2 4
		Output	1	2	-	-
		socket	O-1/2	O-1/2 / O-2	-	-
		pin	4	2 4	-	-
Mechanical data						
Weight [g]		186.4				
Type of mounting		AS-i flat cables directly connectable				
Materials		PA; piercing contacts: CuSn6 nickel-plated and tin-plated;				
Displays / operating elements						
Display		operation		LED, green		
		errors		LED, red		
		function		LED, yellow		
Accessories						
Accessories (supplied)		lower part				
Accessories (optional)		Protective cap: M12, E73004				

AC5234




AS-Interface ClassicLine module with quick mounting technology

ClassicL 2DO-Y 2DI-Y 2A IP67

Remarks	
Remarks	Inputs and outputs must be electrically isolated.
	Do not connect any of the following points to an external potential:
	L-, L+, I-3/4, I-4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

Electrical connection
quick mounting technology for AS-i flat cable: ; three orientations possible

Electrical connection - Outputs
Connection

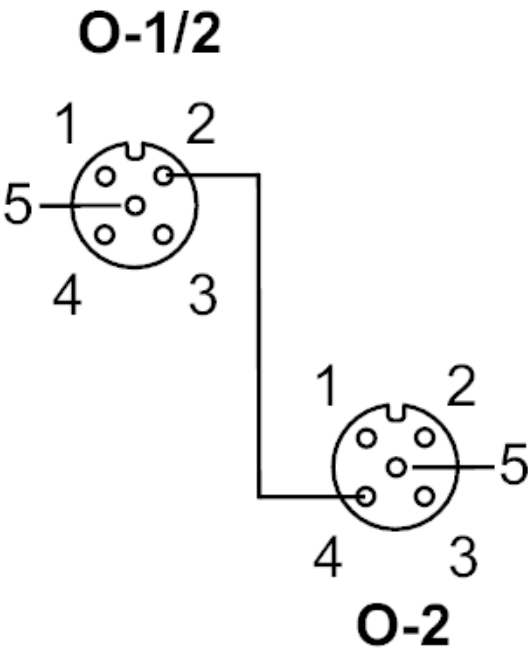



AS-Interface ClassicLine module with quick mounting technology


ClassicL 2DO-Y 2DI-Y 2A IP67

Outputs	
	socket O-1/2
1	not used
2	switching output 2
3	external voltage AUX -
4	switching output 1
5	not used
	socket O-2
1	not used
2	not used
3	external voltage AUX -
4	switching output 2
5	not used

Connector: M12

Electrical connection - Inputs

Connection

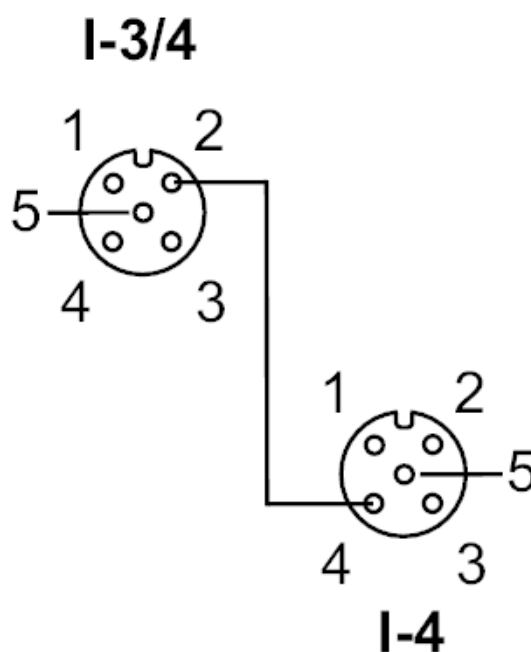



AS-Interface ClassicLine module with quick mounting technology

ClassicL 2DO-Y 2DI-Y 2A IP67

Inputs	
socket I-3/4	
1	Sensor supply L+
2	data input 4
3	Sensor supply L-
4	data input 3
5	not used
socket I-4	
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	data input 4
5	not used

Connector: M12