


AL1123



IO-Link master with EtherNet/IP interface

IO-Link Master SL EIP 8P IP69K

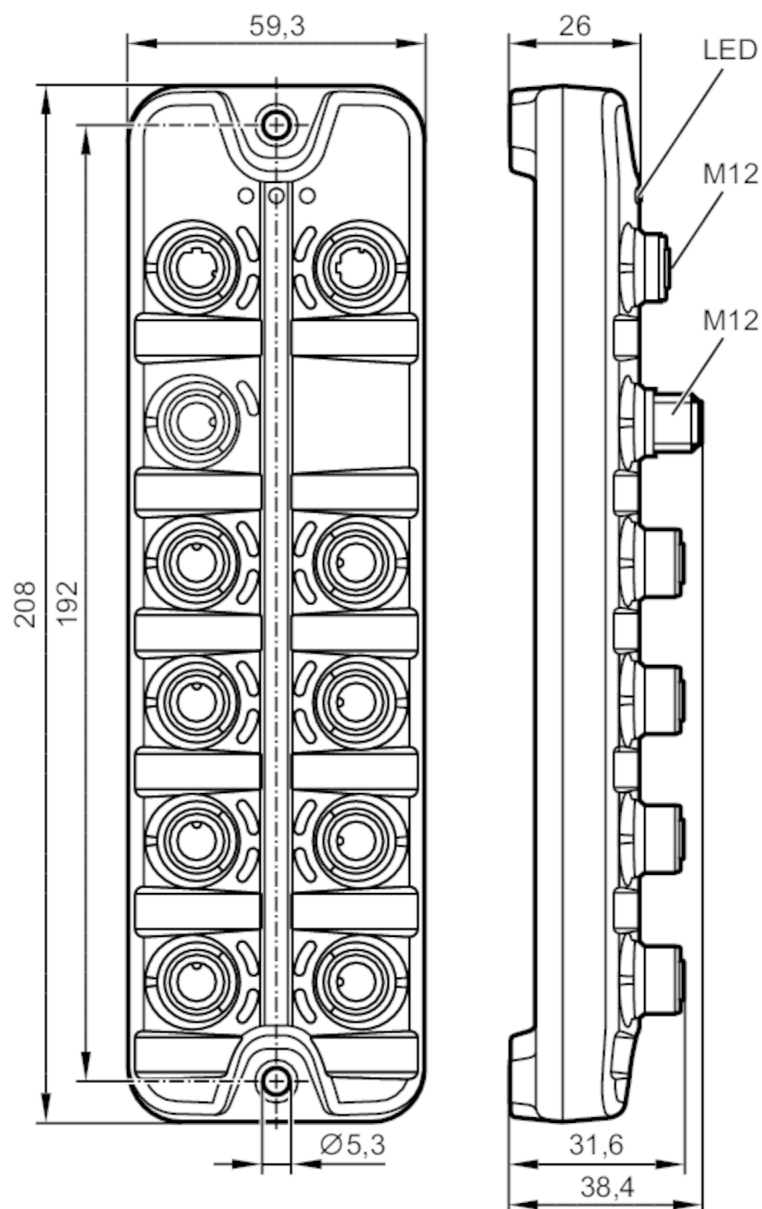

Application

Application	hygienic systems; I/O modules for field applications
Daisy-chain function	fieldbus interface

Electrical data

Operating voltage	[V]	20...30 DC; (US; to SELV/PELV)
Current consumption	[mA]	300...3900; (US)
Protection class		III

sensor supply US

Max. current load total	[A]	3.6
-------------------------	-----	-----



IO-Link master with EtherNet/IP interface


IO-Link Master SL EIP 8P IP69K

Inputs / outputs		
Total number of inputs and outputs	16; (configurable)	
Number of inputs and outputs	Number of digital inputs: 16; Number of digital outputs: 8	
Inputs		
Number of digital inputs	16; (IO-Link Port Class A: 8 x 2)	
Switching level high [V]	11...30	
Switching level low [V]	0...5	
Digital inputs protected against short circuits	yes	
Outputs		
Number of digital outputs	8; (IO-Link Port Class A: 8 x 1)	
Max. current load per output [mA]	200	
Short-circuit proof	yes	
Interfaces		
Communication interface	Ethernet; IO-Link	
Addition	Supported network topologies; line; ring; DLR	
Ethernet		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10; 100	
Protocol	EtherNet/IP	
Factory settings	IP address: 192.168.1.250	
	subnet mask: 255.255.255.0	
	gateway IP address: 0.0.0.0	
	MAC address: see type label	
IO-Link Master		
Transmission type	COM 1 / COM 2 / COM 3	
IO-Link revision	1.1	
Number of ports class A	8	
Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...85	
Max. relative air humidity [%]	90	
Protection	IP 65; IP 66; IP 67; IP 69K; (operation with stainless steel protective caps: IP 69K)	
Degree of soiling	2	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64 2009-04	
	DIN EN 60068-2-6 2008-10	
MTTF [years]	90	



IO-Link master with EtherNet/IP interface

IO-Link Master SL EIP 8P IP69K

Mechanical data	
Weight	[g] 385
Materials	housing: PA grey; socket: stainless steel (1.4404 / 316L)
Accessories	
Accessories (supplied)	Protective cap: 1 x M12, stainless steel, E12542
Remarks	
Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.
Electrical connection - Process connection	
IO-Link Port Class A X01...X04	
1	Sensorversorgung (US) L+
2	digital input
3	Sensorversorgung (US) L-
4	C/Q IO-Link
5	not used
Connector: M12	
	
Electrical connection - voltage supply	
X31	
1	+ 24 V DC (US)
2	not used
3	GND (US)
4	not used
Connector: M12	
	



IO-Link master with EtherNet/IP interface

IO-Link Master SL EIP 8P IP69K

Electrical connection - Ethernet

IN / OUT X21, X22

1	TX +
2	RX +
3	TX -
4	RX -
5	not used

Connector: M12

