


IO-Link master with EtherNet/IP interface

IO-Link Master PL EIP 4P IP67

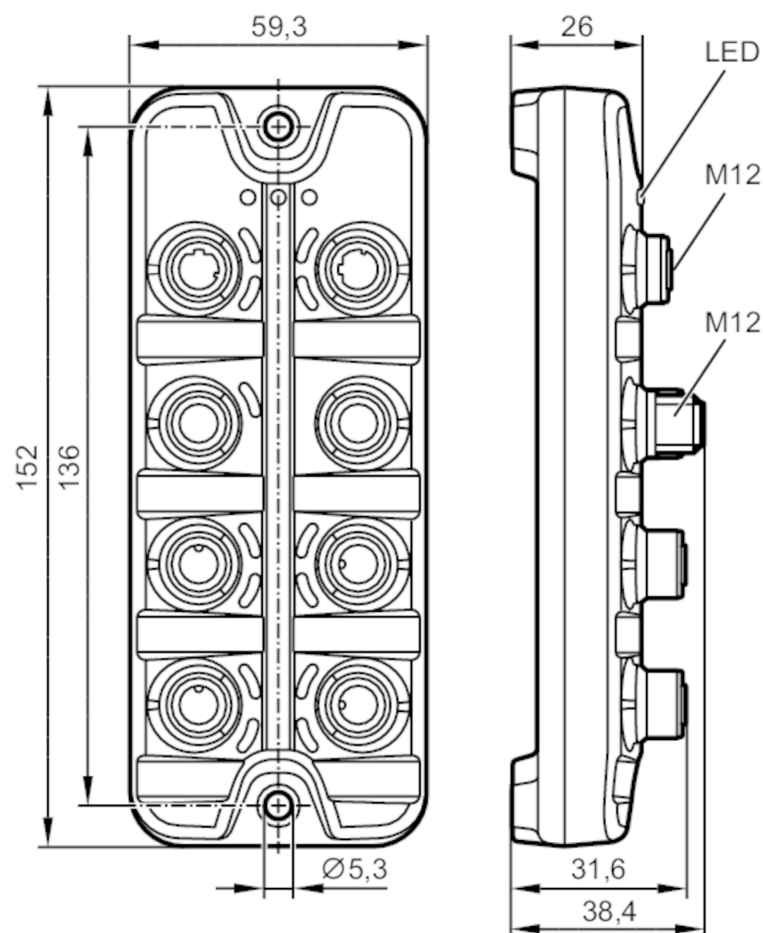

Application

Application	I/O modules for field applications
Daisy-chain function	voltage supply; fieldbus interface

Electrical data

Operating voltage [V]	20...30 DC; (US; to SELV/PELV)
Current consumption [mA]	300...3900; (US)
Protection class	III

sensor supply US

Max. current load total [A]	3.6
-----------------------------	-----

Inputs / outputs

Total number of inputs and outputs	8; (configurable)
------------------------------------	-------------------

Inputs

Number of digital inputs	8; (IO-Link Port Class A: 4 x 2)
Switching level high [V]	11...30
Switching level low [V]	0...5
Digital inputs protected against short circuits	yes



IO-Link master with EtherNet/IP interface

IO-Link Master PL EIP 4P IP67

Outputs		
Number of digital outputs	4; (IO-Link Port Class A: 4 x 1)	
Max. current load per output [mA]	200	
Short-circuit proof	yes	
Interfaces		
Communication interface	Ethernet; IO-Link	
Addition	Supported network topologies; line; ring; DLR	
Ethernet		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10; 100	
Protocol	EtherNet/IP	
Factory settings	IP address: 192.168.1.250	
	subnet mask: 255.255.255.0	
	gateway IP address: 0.0.0.0	
	MAC address: see type label	
IO-Link Master		
Transmission type	COM 1 / COM 2 / COM 3	
IO-Link revision	1.1	
Number of ports class A	4	
Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...85	
Max. relative air humidity [%]	90	
Protection	IP 65; IP 66; IP 67	
Degree of soiling	2	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64 2009-04	
	DIN EN 60068-2-6 2008-10	
MTTF [years]	90	
Mechanical data		
Weight [g]	274	
Materials	housing: PA; socket: brass nickel-plated	
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	



IO-Link master with EtherNet/IP interface


IO-Link Master PL EIP 4P IP67

Electrical connection - Process connection

IO-Link Port Class A X01...X04

1	Sensorversorgung (US) L+
2	digital input
3	Sensorversorgung (US) L-
4	C/Q IO-Link
5	not used

Connector: M12



Electrical connection - voltage supply IN

X31

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black

Connector: M12



Electrical connection - voltage supply OUT

X32


1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black

Connector: M12



IO-Link master with EtherNet/IP interface

IO-Link Master PL EIP 4P IP67



Electrical connection - Ethernet

IN / OUT X21, X22

1	TX +
2	RX +
3	TX -
4	RX -
5	not used

Connector: M12

