

# ATV212WD11N4

variable speed drive ATV212 - 11kW - 15hp -  
480V - 3ph - EMC class C2 - IP55



## Main

|                              |                                      |
|------------------------------|--------------------------------------|
| Range of product             | Altivar 212                          |
| Product or component type    | Variable speed drive                 |
| Device short name            | ATV212                               |
| Product destination          | Asynchronous motors                  |
| Product specific application | Pumps and fans in HVAC               |
| Assembly style               | With heat sink                       |
| Network number of phases     | 3 phases                             |
| Motor power kW               | 11 kW                                |
| Motor power hp               | 15 hp                                |
| Power supply voltage         | 380...480 V (- 15...10 %)            |
| Power supply voltage limits  | 323...528 V                          |
| Supply frequency             | 50...60 Hz (- 5...5 %)               |
| Network frequency            | 47.5...63 Hz                         |
| EMC filter                   | Class C2 EMC filter integrated       |
| Line current                 | 21.2 A for 380 V<br>16.9 A for 480 V |

## Complementary

|                                       |                                                                                                                                                                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Apparent power                        | 17.1 kVA for 380 V                                                                                                                                                                                                                                          |
| Prospective line Isc                  | 22 kA                                                                                                                                                                                                                                                       |
| Continuous output current             | 22.5 A at 380/460 V                                                                                                                                                                                                                                         |
| Maximum transient current             | 24.8 A for 60 s                                                                                                                                                                                                                                             |
| Speed drive output frequency          | 0.5...200 Hz                                                                                                                                                                                                                                                |
| Nominal switching frequency           | 12 kHz                                                                                                                                                                                                                                                      |
| Switching frequency                   | 12...16 kHz with derating factor<br>6...16 kHz adjustable                                                                                                                                                                                                   |
| Speed range                           | 1...10                                                                                                                                                                                                                                                      |
| Speed accuracy                        | +/- 10 % of nominal slip for 0.2 Tn to Tn torque variation                                                                                                                                                                                                  |
| Torque accuracy                       | +/- 15 %                                                                                                                                                                                                                                                    |
| Transient overtorque                  | 120 % of nominal motor torque, +/- 10 % for 60 s                                                                                                                                                                                                            |
| Asynchronous motor control profile    | Voltage/Frequency ratio, 2 points<br>Voltage/Frequency ratio, 5 points<br>Flux vector control without sensor, standard<br>Voltage/Frequency ratio - Energy Saving, quadratic U/f<br>Voltage/Frequency ratio, automatic IR compensation (U/f + automatic Uo) |
| Regulation loop                       | Adjustable PI regulator                                                                                                                                                                                                                                     |
| Motor slip compensation               | Adjustable<br>Automatic whatever the load<br>Not available in voltage/frequency ratio motor control                                                                                                                                                         |
| Local signalling                      | 1 LED - red - DC bus energized                                                                                                                                                                                                                              |
| Output voltage                        | <= power supply voltage                                                                                                                                                                                                                                     |
| Isolation                             | Electrical between power and control                                                                                                                                                                                                                        |
| Type of cable for external connection | UL 508 cable with UL Type 1 kit: 3 wire(s) - 40 °C, copper 75 °C / PVC<br>IEC cable without mounting kit: 1 wire(s) - 45 °C, copper 70 °C / PVC<br>IEC cable without mounting kit: 1 wire(s) - 45 °C, copper 90 °C / XLPE/EPR                               |

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical connection               | Terminal 16 mm <sup>2</sup> / AWG 4 (L1/R, L2/S, L3/T)<br>Terminal 2.5 mm <sup>2</sup> / AWG 14 (VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES)                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tightening torque                   | 3 N.m - 26.5 lb.in (L1/R, L2/S, L3/T)<br>0.6 N.m (VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Supply                              | Internal supply: 24 V (21...27 V) DC - ≤ 200 A with overload and short-circuit protection<br>Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC, +/- 5 % - ≤ 10 A with overload and short-circuit protection                                                                                                                                                                                                                                                                                                                                       |
| Analogue input number               | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Analogue input type                 | Configurable voltage: (VIB) 0...10 V DC - 24 V max - 30000 Ohm - resolution: 10 bits<br>Switch-configurable current: (VIA) 0...20 mA - 250 Ohm - resolution: 10 bits<br>Switch-configurable voltage: (VIA) 0...10 V DC - 24 V max - 30000 Ohm - resolution: 10 bits<br>Configurable PTC probe: (VIB) 0...6 probes - 1500 Ohm                                                                                                                                                                                                                                          |
| Sampling duration                   | 22 ms +/- 0.5 ms (VIB) - analog input(s)<br>3.5 ms +/- 0.5 ms (VIA) - analog input(s)<br>2 ms +/- 0.5 ms (RES) - discrete input(s)<br>2 ms +/- 0.5 ms (R) - discrete input(s)<br>2 ms +/- 0.5 ms (F) - discrete input(s)                                                                                                                                                                                                                                                                                                                                              |
| Response time                       | 7 ms +/- 0.5 ms (RY, RC) - discrete output(s)<br>7 ms +/- 0.5 ms (FLB, FLC) - discrete output(s)<br>7 ms +/- 0.5 ms (FLA, FLC) - discrete output(s)<br>2 ms +/- 0.5 ms (FM) - analog output(s)                                                                                                                                                                                                                                                                                                                                                                        |
| Accuracy                            | +/- 1 % (FM) for a temperature variation 60 °C<br>+/- 0.6 % (VIB) for a temperature variation 60 °C<br>+/- 0.6 % (VIA) for a temperature variation 60 °C                                                                                                                                                                                                                                                                                                                                                                                                              |
| Linearity error                     | +/- 0.2 % for output (FM)<br>+/- 0.15 % of maximum value for input (VIB)<br>+/- 0.15 % of maximum value for input (VIA)                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Analogue output number              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Analogue output type                | Switch-configurable current: (FM) 0...20 mA - 970 Ohm - resolution: 10 bits<br>Switch-configurable voltage: (FM) 0...10 V DC - 7620 Ohm - resolution: 10 bits                                                                                                                                                                                                                                                                                                                                                                                                         |
| Discrete output number              | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Discrete output type                | Configurable relay logic: (RY, RC) NO - 100000 cycles<br>Configurable relay logic: (FLB, FLC) NC - 100000 cycles<br>Configurable relay logic: (FLA, FLC) NO - 100000 cycles                                                                                                                                                                                                                                                                                                                                                                                           |
| Minimum switching current           | 3 mA at 24 V DC (configurable relay logic)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Maximum switching current           | 2 A at 30 V DC on inductive load - cos phi = 0.4 - L/R = 7 ms (FL, R)<br>2 A at 250 V AC on inductive load - cos phi = 0.4 - L/R = 7 ms (FL, R)<br>5 A at 30 V DC on resistive load - cos phi = 1 - L/R = 0 ms (FL, R)<br>5 A at 250 V AC on resistive load - cos phi = 1 - L/R = 0 ms (FL, R)                                                                                                                                                                                                                                                                        |
| Discrete input type                 | Programmable (RES) 24 V DC, with level 1 PLC - 4700 Ohm<br>Programmable (R) 24 V DC, with level 1 PLC - 4700 Ohm<br>Programmable (F) 24 V DC, with level 1 PLC - 4700 Ohm                                                                                                                                                                                                                                                                                                                                                                                             |
| Discrete input logic                | Negative logic (sink) (F, R, RES), ≥ 16 V (state 0), ≤ 10 V (state 1)<br>Positive logic (source) (F, R, RES), ≤ 5 V (state 0), ≥ 11 V (state 1)                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Acceleration and deceleration ramps | Automatic based on the load<br>Linear adjustable separately from 0.01 to 3200 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Braking to standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Protection type                     | With PTC probes for motor<br>Motor phase break for motor<br>Thermal protection for motor<br>Against input phase loss for drive<br>Line supply undervoltage for drive<br>Line supply overvoltage and undervoltage for drive<br>Against exceeding limit speed for drive<br>Break on the control circuit for drive<br>Overvoltages on the DC bus for drive<br>Overcurrent between output phases and earth for drive<br>Input phase breaks for drive<br>Short-circuit between motor phases for drive<br>Thermal power stage for drive<br>Overheating protection for drive |
| Dielectric strength                 | 5092 V DC between control and power terminals<br>3535 V DC between earth and power terminals                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Insulation resistance               | ≥ 1 MOhm at 500 V DC for 1 minute                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Frequency resolution                | 0.024/50 Hz for analog input<br>0.1 Hz for display unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

|                             |                                                                                                                                                                                                                               |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Communication port protocol | APOGEE FLN<br>BACnet<br>LonWorks<br>METASYS N2<br>Modbus                                                                                                                                                                      |
| Connector type              | 1 RJ45<br>1 open style                                                                                                                                                                                                        |
| Physical interface          | 2-wire RS 485                                                                                                                                                                                                                 |
| Transmission frame          | RTU                                                                                                                                                                                                                           |
| Transmission rate           | 9600 bps or 19200 bps                                                                                                                                                                                                         |
| Data format                 | 8 bits, 1 stop, odd even or no configurable parity                                                                                                                                                                            |
| Type of polarization        | No impedance                                                                                                                                                                                                                  |
| Number of addresses         | 1...247                                                                                                                                                                                                                       |
| Communication service       | Monitoring inhibitible<br>Read device identification (43)<br>Read holding registers (03) 2 words maximum<br>Time out setting from 0.1 to 100 s<br>Write multiple registers (16) 2 words maximum<br>Write single register (06) |
| Option card                 | Communication card for LonWorks                                                                                                                                                                                               |
| Operating position          | Vertical +/- 10 degree                                                                                                                                                                                                        |
| Width                       | 290 mm                                                                                                                                                                                                                        |
| Height                      | 560 mm                                                                                                                                                                                                                        |
| Depth                       | 315 mm                                                                                                                                                                                                                        |
| Product weight              | 30.3 kg                                                                                                                                                                                                                       |

## Environment


|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electromagnetic compatibility         | Voltage dips and interruptions immunity test conforming to IEC 61000-4-11<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6<br>1.2/50 $\mu$ s - 8/20 $\mu$ s surge immunity test level 3 conforming to IEC 61000-4-5<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 |
| Pollution degree                      | 2 IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| IP degree of protection               | IP55 conforming to EN/IEC 60529<br>IP55 conforming to EN/IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Vibration resistance                  | 1 gn (f = 13...200 Hz) conforming to EN/IEC 60068-2-8<br>1.5 mm (f = 3...13 Hz) conforming to EN/IEC 60068-2-6                                                                                                                                                                                                                                                                                                                                                                                                          |
| Shock resistance                      | 15 gn for 11 ms conforming to IEC 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Environmental characteristic          | Classes 3S2 conforming to IEC 60721-3-3<br>Classes 3C1 conforming to IEC 60721-3-3                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Noise level                           | 57.4 dB conforming to 86/188/EEC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Operating altitude                    | 1000...3000 m (limited to 2000 m for the Corner Grounded distribution network)<br>with current derating 1 % per 100 m<br><= 1000 m without derating                                                                                                                                                                                                                                                                                                                                                                     |
| Relative humidity                     | 5...95 % without dripping water conforming to IEC 60068-2-3<br>5...95 % without condensation conforming to IEC 60068-2-3                                                                                                                                                                                                                                                                                                                                                                                                |
| Ambient air temperature for operation | > 40...50 °C with derating factor<br>-10...40 °C without derating                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Ambient air temperature for storage   | -25...70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards              | EN 55011 class A group 1<br>EN 61800-3<br>EN 61800-3 category C2<br>EN 61800-3 category C3<br>EN 61800-3 environments 1 category C1<br>EN 61800-3 environments 1 category C2<br>EN 61800-3 environments 1 category C3<br>EN 61800-3 environments 2 category C1<br>EN 61800-3 environments 2 category C2<br>EN 61800-3 environments 2 category C3<br>EN 61800-5-1<br>IEC 61800-3<br>IEC 61800-3 category C2<br>IEC 61800-3 category C3<br>IEC 61800-3 environments 1 category C1<br>IEC 61800-3 environments 1 category C2<br>IEC 61800-3 environments 1 category C3<br>IEC 61800-3 environments 2 category C1<br>IEC 61800-3 environments 2 category C2<br>IEC 61800-3 environments 2 category C3<br>IEC 61800-5-1 |
| Product certifications | CSA<br>C-Tick<br>NOM 117<br>UL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Marking                | CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Offer Sustainability

|                                  |                                                                                          |
|----------------------------------|------------------------------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                                    |
| RoHS                             | Compliant - since 1112 - <a href="#">Schneider Electric declaration of conformity</a>    |
| REACH                            | Reference contains SVHC above the threshold - <a href="#">go to CaP for more details</a> |
| Product environmental profile    | Available <a href="#">Download Product Environmental</a>                                 |
| Product end of life instructions | Available <a href="#">Download End Of Life Manual</a>                                    |

## Dimensions

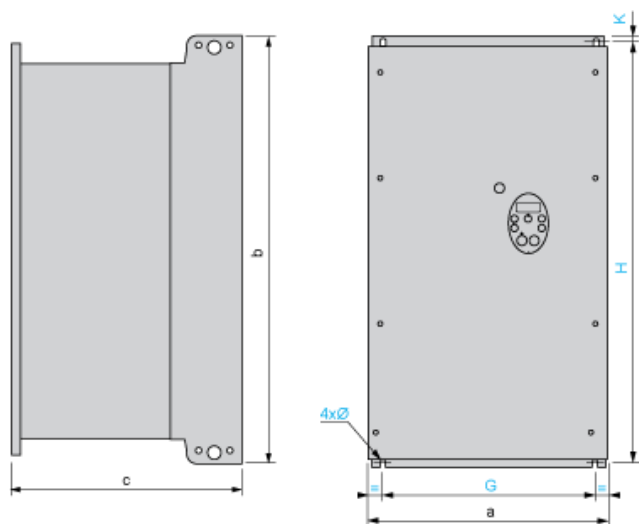

Dimensions in mm

| ATV212W                        | a   | b    | c   | G   | H   | K  | Ø |
|--------------------------------|-----|------|-----|-----|-----|----|---|
| D11N4, D15N4<br>D11N4C, D15N4C | 290 | 560  | 315 | 250 | 544 | 8  | 6 |
| D18N4<br>D18N4C                | 310 | 665  | 315 | 270 | 650 | 10 | 6 |
| D22N4, D30N4<br>D22N4C, D30N4C | 284 | 720  | 315 | 245 | 700 | 10 | 7 |
| D37N4, D45N4<br>D37N4C, D45N4C | 284 | 880  | 343 | 245 | 860 | 10 | 7 |
| D55N4, D75N4<br>D55N4C, D75N4C | 362 | 1000 | 364 | 300 | 975 | 10 | 9 |

Dimensions in in.

| ATV212W                        | a     | b     | c     | G     | H     | K    | Ø    |
|--------------------------------|-------|-------|-------|-------|-------|------|------|
| D11N4, D15N4<br>D11N4C, D15N4C | 11.42 | 22.05 | 12.40 | 9.84  | 21.42 | 0.31 | 0.24 |
| D18N4<br>D18N4C                | 12.20 | 26.18 | 12.40 | 10.63 | 25.59 | 0.39 | 0.24 |
| D22N4, D30N4<br>D22N4C, D30N4C | 11.18 | 28.35 | 12.40 | 9.65  | 27.56 | 0.39 | 0.27 |
| D37N4, D45N4<br>D37N4C, D45N4C | 11.18 | 34.65 | 13.50 | 9.65  | 33.86 | 0.39 | 0.27 |
| D55N4, D75N4<br>D55N4C, D75N4C | 14.25 | 39.37 | 14.33 | 11.81 | 38.39 | 0.39 | 0.35 |

## Mounting Recommendations


### Clearance

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.

Install the unit vertically:


- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from bottom to the top of the unit.

#### Type A Mounting

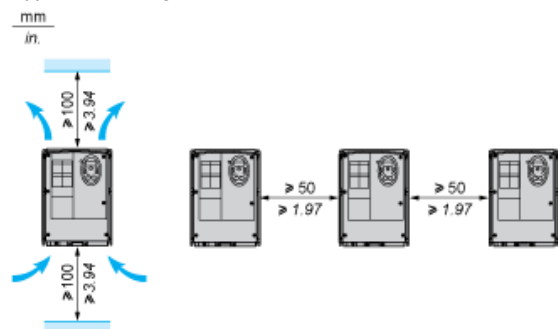

## Recommended Wiring Diagram

### 3-Phase Power Supply

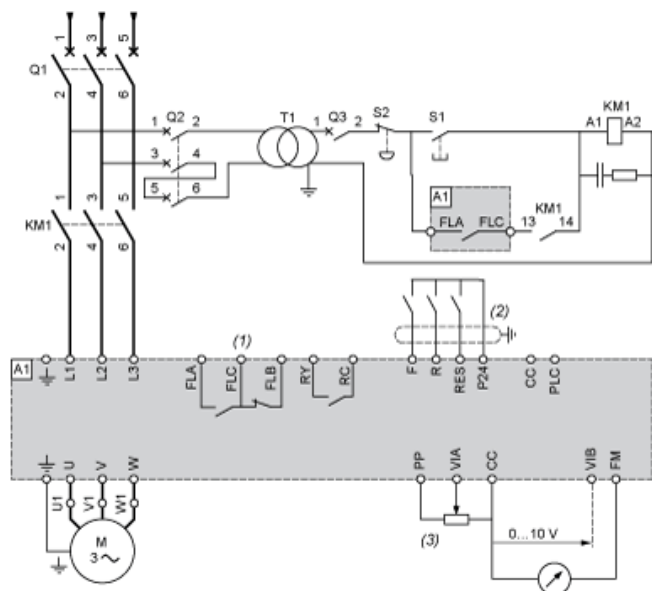

A1: ATV 212 drive

KM1: Contactor

Q1: Circuit breaker

Q2: GV2 L rated at twice the nominal primary current of T1

Q3: GB2CB05

S1, XB4 B or XB5 A pushbuttons

S2:

T1: 100 VA transformer 220 V secondary

(1) Fault relay contacts for remote signalling of the drive status

(2) Connection of the common for the logic inputs depends on the positioning of the switch (Source, PLC, Sink)

(3) Reference potentiometer SZ1RV1202

All terminals are located at the bottom of the drive. Install interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

### Switches (Factory Settings)


Voltage/current selection for analog I/O (VIA and VIB)



Voltage/current selection for analog I/O (FM)



Selection of logic type




(1) negative logic

(2) positive logic


### Other Possible Wiring Diagrams

## Logic Inputs According to the Position of the Logic Type Switch


"Source" position




"Sink" position



"PLC" position with PLC transistor outputs




(1) PLC



(1) PLC

2-wire control




F: Forward

R: Preset speed

(2) ATV 212 control terminals

3-wire control




F: Forward

R: Stop

RES: Reverse

(2) ATV 212 control terminals

PTC probe




(2) ATV 212 control terminals

(3) Motor

## Analog Inputs


Voltage analog inputs

External +10 V




(2) ATV 212 control terminals

(4) Speed reference potentiometer 2.2 to 10 kΩ



(2) ATV 212 control terminals


Analog input configured for current: 0-20 mA, 4-20 mA, X-Y mA



(2) ATV 212 control terminals


(5) Source 0-20 mA, 4-20 mA, X-Y mA

Analog input VIA configured as positive logic input ("Source" position)



(2) ATV 212 control terminals

Analog input VIA configured as negative logic input ("Sink" position)




(2) ATV 212 control terminals

---

## Derating Curves

---

The derating curves for the drive nominal current ( $I_n$ ) depend on the temperature and the switching frequency.  
For intermediate temperatures (45°C for example), interpolate between 2 curves.

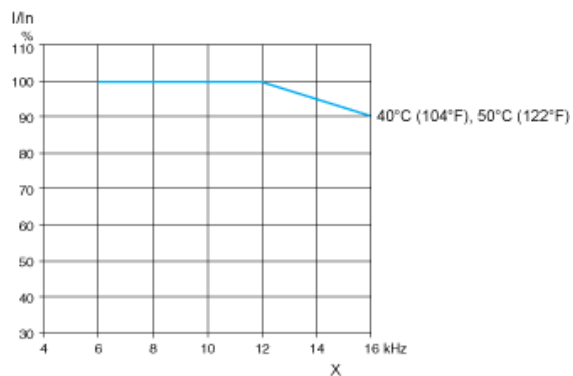

X Switching frequency