

# ATV340U15N4E

variable speed drive - 1.5kW- 400V - 3 phases -  
ATV340 Ethernet



## Main

|                           |                                                                                                                                                                                                                                                                                                                                  |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product          | Altivar Machine ATV340                                                                                                                                                                                                                                                                                                           |
| Product or component type | Variable speed drive                                                                                                                                                                                                                                                                                                             |
| Device application        | Machine                                                                                                                                                                                                                                                                                                                          |
| Device short name         | ATV340                                                                                                                                                                                                                                                                                                                           |
| Variant                   | Standard version                                                                                                                                                                                                                                                                                                                 |
| Product destination       | Asynchronous motors<br>Synchronous motors                                                                                                                                                                                                                                                                                        |
| Mounting mode             | Cabinet mount                                                                                                                                                                                                                                                                                                                    |
| EMC filter                | Integrated with 20 m conforming to EN/IEC 61800-3 category C3                                                                                                                                                                                                                                                                    |
| IP degree of protection   | IP20 conforming to IEC 61800-5-1<br>IP20 conforming to IEC 60529                                                                                                                                                                                                                                                                 |
| Type of cooling           | Forced convection                                                                                                                                                                                                                                                                                                                |
| Supply frequency          | 50...60 Hz +/- 5 %                                                                                                                                                                                                                                                                                                               |
| Network number of phases  | 3 phases                                                                                                                                                                                                                                                                                                                         |
| [Us] rated supply voltage | 380...480 V - 15...10 %                                                                                                                                                                                                                                                                                                          |
| Motor power kW            | 2.2 kW for normal duty<br>1.5 kW for heavy duty                                                                                                                                                                                                                                                                                  |
| Motor power hp            | 3 hp for normal duty<br>2 hp for heavy duty                                                                                                                                                                                                                                                                                      |
| Line current              | 6 A at 380 V without line choke (heavy duty)<br>4.9 A at 480 V without line choke (heavy duty)<br>5.1 A at 380 V with external line choke (normal duty)<br>4.1 A at 480 V with external line choke (normal duty)<br>3.5 A at 380 V with external line choke (heavy duty)<br>2.8 A at 480 V with external line choke (heavy duty) |
| Prospective line Isc      | 5 kA                                                                                                                                                                                                                                                                                                                             |
| Apparent power            | 3.8 kVA at 480 V (normal duty)<br>4.1 kVA at 480 V (heavy duty)                                                                                                                                                                                                                                                                  |
| Continuous output current | 5.6 A at 4 kHz for normal duty<br>4 A at 4 kHz for heavy duty                                                                                                                                                                                                                                                                    |
| Maximum transient current | 6.2 A during 60 s (normal duty)                                                                                                                                                                                                                                                                                                  |

|                                    |                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------|
|                                    | 6 A during 60 s (heavy duty)<br>7.6 A during 2 s (normal duty)<br>7.2 A during 2 s (heavy duty) |
| Asynchronous motor control profile | Constant torque standard<br>Optimized torque mode<br>Variable torque standard                   |
| Synchronous motor control profile  | Permanent magnet motor<br>Reluctance motor                                                      |
| Speed drive output frequency       | 0.1...599 Hz                                                                                    |
| Nominal switching frequency        | 4 kHz                                                                                           |
| Switching frequency                | 2...16 kHz adjustable<br>8...16 kHz with derating factor                                        |
| Safety function                    | STO (safe torque off) SIL 3                                                                     |

## Complementary

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of preset speeds             | 16 preset speeds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Communication port protocol         | Modbus serial<br>Ethernet/IP<br>Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Option card                         | Slot GP-X: digital and analog I/O extension module<br>Slot GP-X: output relay extension module<br>Slot GP-ENC: 5/12 V digital encoder interface module<br>Slot GP-ENC: analog encoder interface module<br>Slot GP-ENC: resolver encoder interface module                                                                                                                                                                                                                                                                                                                                                                          |
| Output voltage                      | <= power supply voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Permissible temporary current boost | 1.1 x I <sub>n</sub> during 60 s (normal duty)<br>1.35 x I <sub>n</sub> during 2 s (normal duty)<br>1.5 x I <sub>n</sub> during 60 s (heavy duty)<br>1.8 x I <sub>n</sub> during 2 s (heavy duty)                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Motor slip compensation             | Adjustable<br>Not available in permanent magnet motor law<br>Can be suppressed<br>Automatic whatever the load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Acceleration and deceleration ramps | Linear adjustable separately from 0.01...9999 s<br>S, U or customized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Braking to standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Protection type                     | Thermal protection: motor<br>Safe torque off: motor<br>Motor phase loss: motor<br>Thermal protection: drive<br>Safe torque off: drive<br>Overheating: drive<br>Overcurrent: drive<br>Output overcurrent between motor phase and earth: drive<br>Output overcurrent between motor phases: drive<br>Short-circuit between motor phase and earth: drive<br>Short-circuit between motor phases: drive<br>Motor phase loss: drive<br>DC Bus overvoltage: drive<br>Line supply overvoltage: drive<br>Line supply undervoltage: drive<br>Input supply loss: drive<br>Exceeding limit speed: drive<br>Break on the control circuit: drive |
| Frequency resolution                | Display unit: 0.1 Hz<br>Analog input: 0.012/50 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Electrical connection               | Line side: screw terminal 1.5...4 mm <sup>2</sup> /AWG 14...AWG 12<br>DC bus: screw terminal 4...6 mm <sup>2</sup> /AWG 12...AWG 10<br>Motor: screw terminal 1.5...4 mm <sup>2</sup> /AWG 14...AWG 12<br>Control: screw terminal 0.2...2.5 mm <sup>2</sup> /AWG 24...AWG 12                                                                                                                                                                                                                                                                                                                                                       |
| Connector type                      | connector(s) 1 x RJ45, Modbus serial on front face<br>connector(s) 1 x RJ45, Modbus serial for HMI on front face<br>connector(s) 2 x RJ45, Ethernet IP/Modbus TCP on front face                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Physical interface                  | 2-wire RS 485 for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Transmission frame                  | RTU for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transmission rate         | 4800 bps, 9600 bps, 19200 bps, 38.4 Kbps for Modbus serial<br>10/100 Mbit/s for Ethernet IP/Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Exchange mode             | Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Data format               | 8 bits, configurable odd, even or no parity for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type of polarization      | No impedance for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Number of addresses       | 1...247 for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Method of access          | Slave Modbus RTU<br>Slave Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Supply                    | External supply for digital inputs: 24 V DC (19...30 V), <1.25 mA, protection type: overload and short-circuit protection<br>Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection<br>Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection                                                                                                                                                                                                       |
| Local signalling          | Local diagnostic: 4 LED (mono/dual colour)<br>Communication module status: 4 LED (dual colour)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Width                     | 85 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Height                    | 270 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Depth                     | 232.5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Product weight            | 1.7 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Analogue input number     | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Analogue input type       | AI1 software-configurable current: 0...20 mA, impedance: 250 Ohm, resolution 12 bits<br>AI1 software-configurable temperature probe or water level sensor<br>AI1 software-configurable voltage: 0...10 V DC, impedance: 31.5 kOhm, resolution 12 bits<br>AI2 software-configurable voltage: - 10...10 V DC, impedance: 20 kOhm, resolution 12 bits                                                                                                                                                                                                                                                                   |
| Discrete input number     | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Discrete input type       | PTI programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V)<br>STOA, STOB safe torque off, 24 V DC (<= 30 V), impedance: > 2.2 kOhm<br>DI1...DI5 programmable, 24 V DC (<= 30 V), impedance: 4.4 kOhm                                                                                                                                                                                                                                                                                                                                                                                                             |
| Input compatibility       | DI1...DI5: discrete input level 1 PLC conforming to EN/IEC 61131-2<br>PTI: pulse input level 1 PLC conforming to IEC 65A-68<br>STOA, STOB: discrete input level 1 PLC conforming to EN/IEC 61131-2                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Discrete input logic      | Positive logic (source) (DI1...DI5), < 5 V (state 0), > 11 V (state 1)<br>Negative logic (sink) (DI1...DI5), > 16 V (state 0), < 10 V (state 1)<br>Positive logic (source) (PTI), < 0.6 V (state 0), > 2.5 V (state 1)<br>Positive logic (source) (STOA, STOB), < 5 V (state 0), > 11 V (state 1)                                                                                                                                                                                                                                                                                                                    |
| Analogue output number    | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Analogue output type      | Software-configurable voltage AQ1: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1: 0...20 mA impedance 500 Ohm, resolution 10 bits                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Input/Output type         | Programmable as logic input/output DQ1: 0...1 kHz, <= 30 V DC, 100 mA<br>Programmable as logic input/output DQ2: 0...1 kHz, <= 30 V DC, 100 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Sampling duration         | 2 ms +/- 0.5 ms (DI1...DI5) - discrete input<br>5 ms +/- 1 ms (PTI) - pulse input<br>1 ms +/- 1 ms (AI1, AI2) - analog input<br>5 ms +/- 1 ms (AQ1) - analog output<br>2 ms +/- 0.5 ms (DQ1, DQ2) - discrete input/output                                                                                                                                                                                                                                                                                                                                                                                            |
| Accuracy                  | +/- 0.6 % AI1, AI2 for a temperature variation 60 °C analog input<br>+/- 1 % AQ1 for a temperature variation 60 °C analog output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Linearity error           | AI1, AI2: +/- 0.15 % of maximum value for analog input<br>AQ1: +/- 0.2 % for analog output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Relay output number       | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Relay output type         | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles<br>Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Refresh time              | Relay output (R1, R2): 5 ms (+/- 0.5 ms)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Minimum switching current | Relay output R1, R2: 5 mA at 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Maximum switching current | Relay output R1 on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1 on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC<br>Relay output R2 on resistive load, cos phi = 1: 5 A at 250 V AC<br>Relay output R2 on resistive load, cos phi = 1: 5 A at 30 V DC<br>Relay output R2 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R2 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |

## Environment

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Isolation                             | Between power and control terminals                                                                                                                                                                                                                                                                                                                                                                                              |
| Insulation resistance                 | > 1 MOhm 500 V DC for 1 minute to earth                                                                                                                                                                                                                                                                                                                                                                                          |
| Noise level                           | 55.4 dB conforming to 86/188/EEC                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power dissipation in W                | Natural convection: 46 W at 380 V, switching frequency 4 kHz (heavy duty)<br>Forced convection: 46 W at 380 V, switching frequency 4 kHz (heavy duty)<br>Natural convection: 59 W at 380 V, switching frequency 4 kHz (normal duty)<br>Forced convection: 59 W at 380 V, switching frequency 4 kHz (normal duty)                                                                                                                 |
| Operating position                    | Vertical +/- 10 degree                                                                                                                                                                                                                                                                                                                                                                                                           |
| Electromagnetic compatibility         | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-5<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| Pollution degree                      | 2 conforming to EN/IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                 |
| Vibration resistance                  | 1.5 mm peak to peak (f= 2...19 Hz) conforming to EN/IEC 60721-3-3 class 3M3<br>1 gn (f= 9...200 Hz) conforming to EN/IEC 60721-3-3 class 3M3                                                                                                                                                                                                                                                                                     |
| Shock resistance                      | 15 gn for 11 ms, class 3M3 conforming to EN/IEC 60721-3-3                                                                                                                                                                                                                                                                                                                                                                        |
| Relative humidity                     | 5...95 % without condensation conforming to EN/IEC 60721-3-3 class 3K3                                                                                                                                                                                                                                                                                                                                                           |
| Ambient air temperature for operation | -15...50 °C without current derating (heavy duty)<br>-15...40 °C without current derating (normal duty)<br>50...60 °C with current derating (heavy duty)<br>40...60 °C with current derating (normal duty)                                                                                                                                                                                                                       |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating altitude                    | <= 1000 m without<br>1000...3000 m with current derating 1 % per 100 m                                                                                                                                                                                                                                                                                                                                                           |
| Environmental characteristic          | Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3<br>Dust pollution resistance class 3S3 conforming to EN/IEC 60721-3-3                                                                                                                                                                                                                                                                                     |
| Standards                             | EN/IEC 61800-3<br>Environment 1 category C2 EN/IEC 61800-3<br>Environment 2 category C3 EN/IEC 61800-3<br>EN/IEC 61800-5-1<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1<br>UL 618000-5-1                                                                                                                                                                                                                                           |
| Product certifications                | REACH<br>CSA<br>UL<br>TÜV                                                                                                                                                                                                                                                                                                                                                                                                        |
| Marking                               | CE                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Offer Sustainability


|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                           |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

## Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

Views: Front - Left - Rear

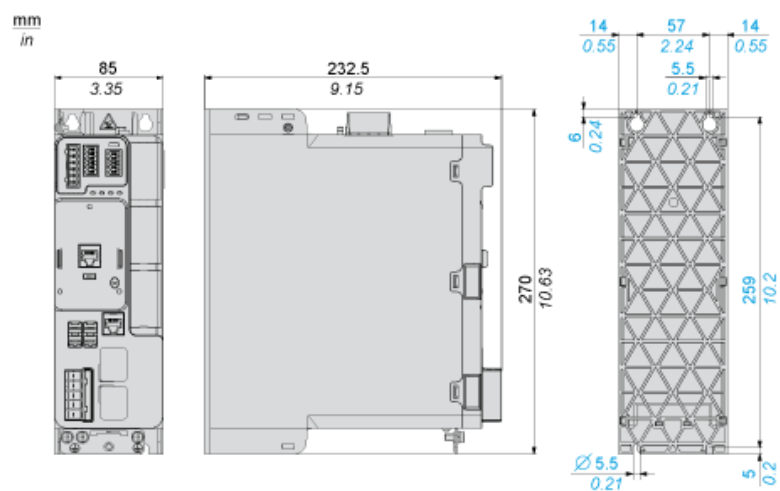

Clearance

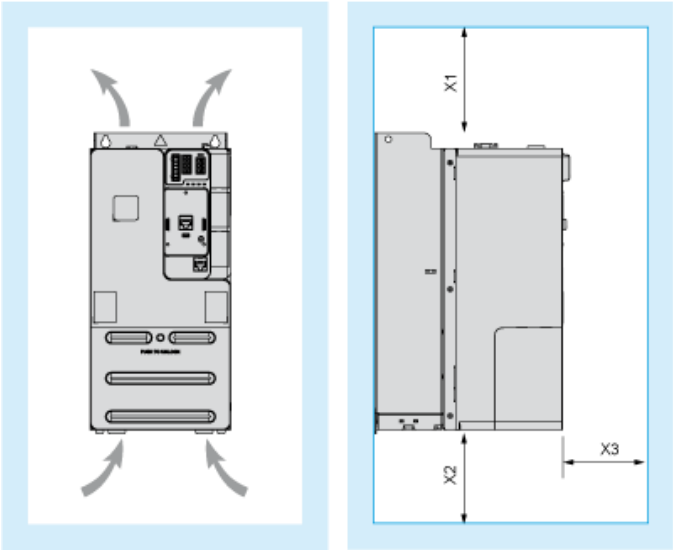

Dimensions in mm


| X1       | X2       | X3      |
|----------|----------|---------|
| ≥<br>100 | ≥<br>100 | ≥<br>60 |

Dimensions in in.

| X1        | X2        | X3        |
|-----------|-----------|-----------|
| ≥<br>3.94 | ≥<br>3.94 | ≥<br>2.36 |


## Mounting Types

### Mounting Type A: Side by Side IP20

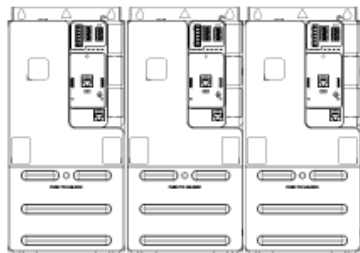

Possible, at ambient temperature  $\leq 50^{\circ}\text{C}$  ( $122^{\circ}\text{F}$ )

### Mounting Type B: Individual IP20

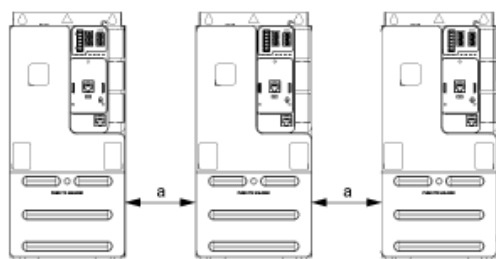


$a \geq 50 \text{ mm (1.97 in.)}$  from  $50\ldots60^{\circ}\text{C}$ , no restriction below  $50^{\circ}\text{C}$

## Connections and Schema


### Three-phase Power Supply with Upstream Breaking via Line Contactor Without Safety Function STO

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

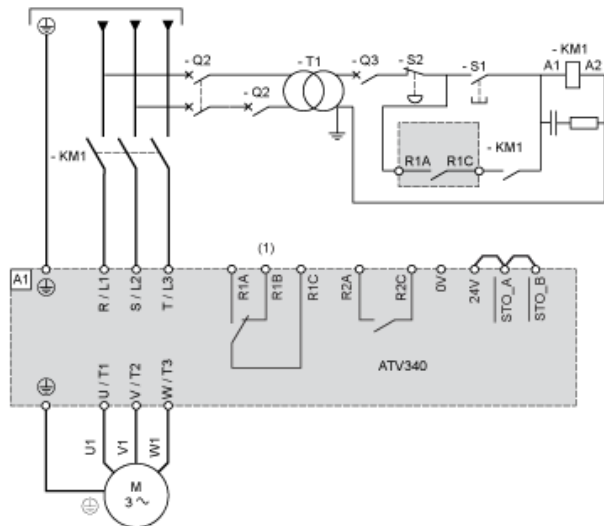


- (1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.  
A1 : Drive  
KM1 : Line Contactor  
Q2, Q3 : Circuit breakers  
S1 : Pushbutton  
S2 : Emergency stop  
T1 : Transformer for control part

### Three-phase Power Supply With Downstream Breaking via Switch Disconnecter

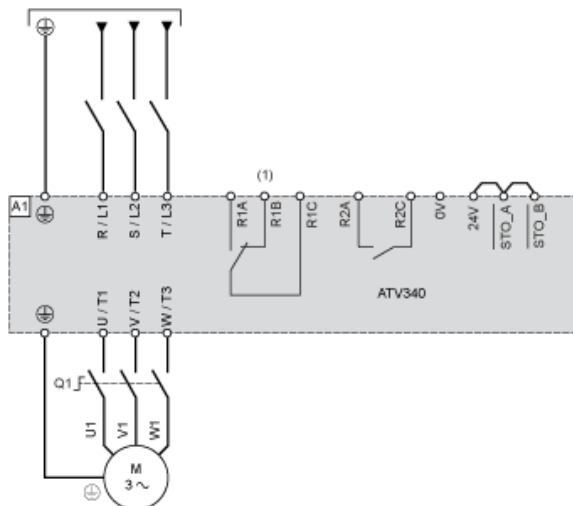

- (1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.  
A1 : Drive  
Q1 : Switch disconnecter

## Sensor Connection

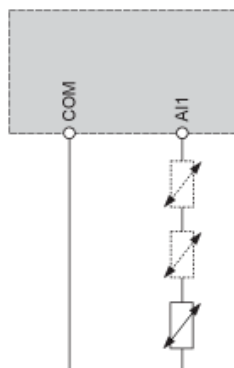


It is possible to connect either 1 or 3 sensors on terminals AI1.

- R1A, R1B, R1C relay  
R2A, R2C Sequence relay

## Digital Inputs Wiring

### Digital Inputs: Internal Supply


Using DISUP Signal




In SRC position DISUP outputs 24 V. In SK position DISUP is connected to 0 V.

### Digital Inputs: External Supply

Positive Logic, Source, European Style

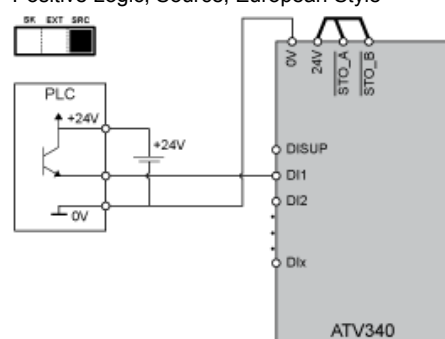


Negative Logic, Sink, Asian Style

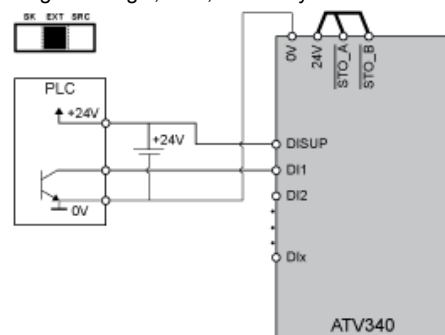

### Negative Logic, Sink, Asian Style


### Negative Logic, Sink, Asian Style

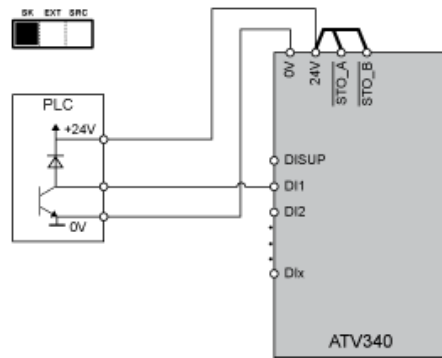

## Digital Outputs Wiring


### Digital Outputs: Internal Supply

Positive Logic, Source, European Style, DQCOM to +24V

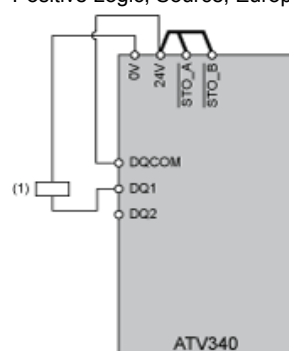

(1) Relay or valve


Negative Logic, Sink, Asian Style, DQCOM to 0V

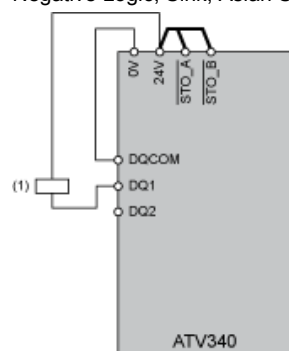

(1) Relay or valve


### Digital Outputs: External Supply

Positive Logic, Source, European Style, DQCOM to +24V




(1) Relay or valve

Negative Logic, Sink, Asian Style, DQCOM to 0V




(1) Relay or valve

## Open Loop Applications

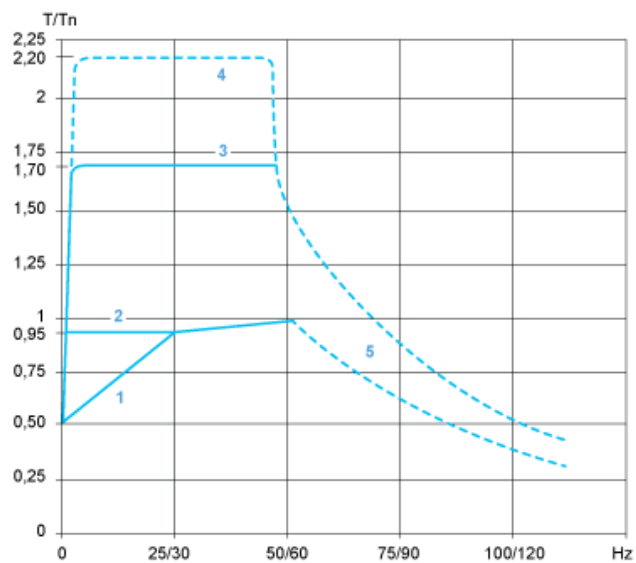

- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Transient overtorque for 2 s maximum
- 5 : Torque in overspeed at constant power

## Closed Loop Applications

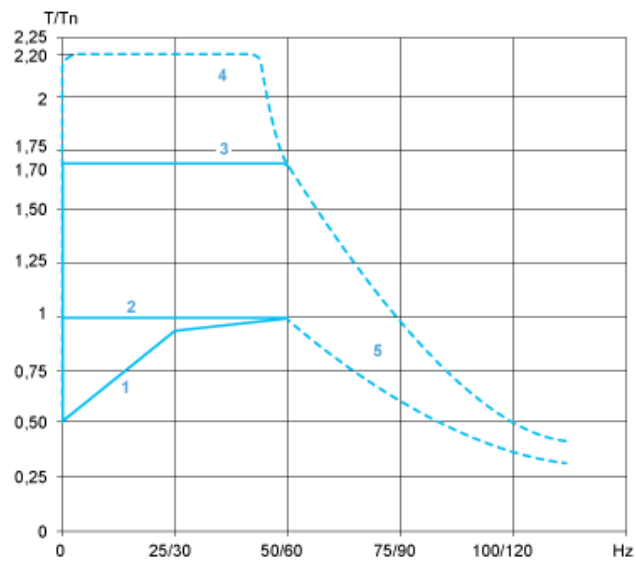

- 1 : Self-cooled motor: continuous useful torque
- 2 : Force-cooled motor: continuous useful torque
- 3 : Overtorque for 60 s maximum
- 4 : Transient overtorque for 2 s maximum
- 5 : Torque in overspeed at constant power