

# ATV950U07N4

variable speed drive, ATV950, 0,75kW, 400/480V,  
with braking unit, IP55



Price\* : 522.00 GBP



## Main

|                           |                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Range of product          | Altivar Process ATV900                                                                                                          |
| Product or component type | Variable speed drive                                                                                                            |
| Device application        | Industrial application                                                                                                          |
| Device short name         | ATV950                                                                                                                          |
| Variant                   | With braking chopper<br>Standard version                                                                                        |
| Product destination       | Asynchronous motors<br>Synchronous motors                                                                                       |
| Mounting mode             | Wall mount                                                                                                                      |
| EMC filter                | Integrated with 50 m conforming to EN/IEC 61800-3 category C2<br>Integrated with 150 m conforming to EN/IEC 61800-3 category C3 |
| IP degree of protection   | IP55 conforming to IEC 61800-5-1<br>IP55 conforming to IEC 60529                                                                |
| Type of cooling           | Forced convection                                                                                                               |
| Supply frequency          | 50...60 Hz +/- 5 %                                                                                                              |
| Network number of phases  | 3 phases                                                                                                                        |
| [Us] rated supply voltage | 380...480 V - 15...10 %                                                                                                         |
| Motor power kW            | 0.75 kW (normal duty)<br>0.37 kW (heavy duty)                                                                                   |
| Motor power hp            | 1 hp normal duty<br>0.5 hp heavy duty                                                                                           |
| Line current              | 1.5 A at 380 V (normal duty)<br>1.3 A at 480 V (normal duty)<br>0.9 A at 380 V (heavy duty)<br>0.8 A at 480 V (heavy duty)      |
| Prospective line Isc      | 50 kA                                                                                                                           |
| Apparent power            | 1.1 kVA at 480 V (normal duty)<br>0.7 kVA at 480 V (heavy duty)                                                                 |
| Continuous output current | 2.2 A at 4 kHz for normal duty<br>1.5 A at 4 kHz for heavy duty                                                                 |

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum transient current          | 2.6 A during 60 s (normal duty)<br>2.3 A during 60 s (heavy duty)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Asynchronous motor control profile | Constant torque standard<br>Optimized torque mode<br>Variable torque standard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Synchronous motor control profile  | Permanent magnet motor<br>Synchronous reluctance motor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Speed drive output frequency       | 0.1...599 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Nominal switching frequency        | 4 kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Switching frequency                | 2...16 kHz adjustable<br>4...16 kHz with derating factor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Safety function                    | STO (safe torque off) SIL 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Number of preset speeds            | 16 preset speeds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Communication port protocol        | Modbus serial<br>Modbus TCP<br>Ethernet/IP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Option module                      | Slot A: communication module for Profibus DP V1<br>Slot A: communication module for Profinet<br>Slot A: communication module for DeviceNet<br>Slot A: communication module for EtherCAT<br>Slot A: communication module for CANopen daisy chain RJ45<br>Slot A: communication module for CANopen SUB-D 9<br>Slot A: communication module for CANopen screw terminals<br>Slot A/slot B/slot C: digital and analog I/O extension module<br>Slot A/slot B/slot C: output relay extension module<br>Slot B: 5/12 V digital encoder interface module<br>Slot B: analog encoder interface module<br>Slot B: resolver encoder interface module<br>communication module for Ethernet Powerlink |

## Complementary

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output voltage                      | <= power supply voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor slip compensation             | Not available in permanent magnet motor law<br>Automatic whatever the load<br>Adjustable<br>Can be suppressed                                                                                                                                                                                                                                                                                                                                                                                                                |
| Acceleration and deceleration ramps | Linear adjustable separately from 0.01...9999 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Braking to standstill               | By DC injection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Protection type                     | Thermal protection: motor<br>Safe torque off: motor<br>Motor phase break: motor<br>Thermal protection: drive<br>Safe torque off: drive<br>Overheating: drive<br>Overcurrent between output phases and earth: drive<br>Overload of output voltage: drive<br>Short-circuit protection: drive<br>Motor phase break: drive<br>Overvoltages on the DC bus: drive<br>Line supply overvoltage: drive<br>Line supply undervoltage: drive<br>Line supply phase loss: drive<br>Overspeed: drive<br>Break on the control circuit: drive |
| Frequency resolution                | Display unit: 0.1 Hz<br>Analog input: 0.012/50 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Electrical connection               | Control: screw terminal 0.5...1.5 mm <sup>2</sup> /AWG 20...AWG 16<br>DC bus: screw terminal 2.5...6 mm <sup>2</sup> /AWG 14...AWG 10<br>Motor: screw terminal 4...6 mm <sup>2</sup> /AWG 12...AWG 10<br>Line side: screw terminal 4...6 mm <sup>2</sup> /AWG 12...AWG 10                                                                                                                                                                                                                                                    |
| Connector type                      | 2 RJ45 for Ethernet IP/Modbus TCP on the control block<br>1 RJ45 for Modbus serial on the control block                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Physical interface                  | 2-wire RS 485 for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Transmission frame                  | RTU for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Transmission rate                   | 10/100 Mbit/s for Ethernet IP/Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           | 4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Exchange mode             | Half duplex, full duplex, autonegotiation Ethernet IP/Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Data format               | 8 bits, configurable odd, even or no parity for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type of polarization      | No impedance for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Number of addresses       | 1...247 for Modbus serial                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Method of access          | Slave Modbus TCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Supply                    | External supply for digital inputs: 24 V DC (19...30 V), <1.25 mA, protection type: overload and short-circuit protection<br>Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 mA, protection type: overload and short-circuit protection<br>Internal supply for digital inputs and STO: 24 V DC (21...27 V), <200 mA, protection type: overload and short-circuit protection                                                                                                                                                                                                                       |
| Local signalling          | Local diagnostic: 3 LED (mono/dual colour)<br>Embedded communication status: 5 LED (dual colour)<br>Communication module status: 2 LED (dual colour)<br>Presence of voltage: 1 LED (red)                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Width                     | 264 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Height                    | 678 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Depth                     | 272 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Product weight            | 10.5 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Analogue input number     | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Analogue input type       | AI1, AI2, AI3 software-configurable voltage: 0...10 V DC, impedance: 30 kOhm, resolution 12 bits<br>AI1, AI2, AI3 software-configurable current: 0...20 mA/4...20 mA, impedance: 250 Ohm, resolution 12 bits                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Discrete input number     | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Discrete input type       | DI1...DI8 programmable, 24 V DC (<= 30 V), impedance: 3.5 kOhm<br>DI7, DI8 programmable as pulse input: 0...30 kHz, 24 V DC (<= 30 V)<br>STOA, STOB safe torque off, 24 V DC (<= 30 V), impedance: > 2.2 kOhm                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Input compatibility       | DI1...DI8: discrete input level 1 PLC conforming to EN/IEC 61131-2<br>DI7, DI8: pulse input level 1 PLC conforming to IEC 65A-68<br>STOA, STOB: discrete input level 1 PLC conforming to EN/IEC 61131-2                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Discrete input logic      | Positive logic (source) (DI1...DI8), < 5 V (state 0), > 11 V (state 1)<br>Negative logic (sink) (DI1...DI8), > 16 V (state 0), < 10 V (state 1)<br>Positive logic (source) (DI7, DI8), < 0.6 V (state 0), > 2.5 V (state 1)<br>Positive logic (source) (STOA, STOB), < 5 V (state 0), > 11 V (state 1)                                                                                                                                                                                                                                                                                                                               |
| Analogue output number    | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Analogue output type      | Software-configurable voltage AQ1, AQ2: 0...10 V DC impedance 470 Ohm, resolution 10 bits<br>Software-configurable current AQ1, AQ2: 0...20 mA impedance 500 Ohm, resolution 10 bits                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Discrete output number    | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Discrete output type      | Logic output DQ+ 0...1 kHz <= 30 V DC 100 mA<br>Programmable as pulse output DQ+ 0...30 kHz <= 30 V DC 20 mA<br>Logic output DQ- 0...1 kHz <= 30 V DC 100 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Sampling duration         | 2 ms +/- 0.5 ms (DI1...DI8) - discrete input<br>5 ms +/- 1 ms (DI7, DI8) - pulse input<br>1 ms +/- 1 ms (AI1, AI2, AI3) - analog input<br>5 ms +/- 1 ms (AQ1, AQ2) - analog output                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Accuracy                  | +/- 0.6 % AI1, AI2, AI3 for a temperature variation 60 °C analog input<br>+/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Linearity error           | AI1, AI2, AI3: +/- 0.15 % of maximum value for analog input<br>AQ1, AQ2: +/- 0.2 % for analog output                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Maximum switching current | Relay output R1 on resistive load, cos phi = 1: 3 A at 250 V AC<br>Relay output R1 on resistive load, cos phi = 1: 3 A at 30 V DC<br>Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R1 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC<br>Relay output R2, R3 on resistive load, cos phi = 1: 5 A at 250 V AC<br>Relay output R2, R3 on resistive load, cos phi = 1: 5 A at 30 V DC<br>Relay output R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC<br>Relay output R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC |
| Relay output number       | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Relay output type         | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles<br>Configurable relay logic R2: sequence relay NO electrical durability 1000000 cycles<br>Configurable relay logic R3: sequence relay NO electrical durability 1000000 cycles                                                                                                                                                                                                                                                                                                                                                                     |
| Refresh time              | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

|                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Minimum switching current                  | Relay output R1, R2, R3: 5 mA at 24 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Isolation                                  | Between power and control terminals                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Variable speed drive application selection | Mixer Food and beverage processing<br>Conveyor Food and beverage processing<br>Shredder Food and beverage processing<br>Process crane Hoisting<br>Thruster Marine<br>Winch Marine<br>Press Material working (wood, ceramic, stone, pvc, metal)<br>Extruder Material working (wood, ceramic, stone, pvc, metal)<br>Other application Mining mineral and metal<br>Drilling rig Oil and gas<br>Progressive cavity pump Oil and gas<br>Rod pump Oil and gas<br>Swapping pump Oil and gas<br>Compressor for regasification Oil and gas<br>Separator Oil and gas<br>Other application Oil and gas<br>Separator Water and waste water |
| Power range                                | 0.55...1 kW at 380...440 V 3 phases<br>0.55...1 kW at 480...500 V 3 phases                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Environment

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Insulation resistance                 | > 1 MOhm 500 V DC for 1 minute to earth                                                                                                                                                                                                                                                                                                                                                                                          |
| Noise level                           | 52 dB conforming to 86/188/EEC                                                                                                                                                                                                                                                                                                                                                                                                   |
| Vibration resistance                  | 1.5 mm peak to peak (f= 2...13 Hz) conforming to IEC 60068-2-6<br>1 gn (f= 13...200 Hz) conforming to IEC 60068-2-6                                                                                                                                                                                                                                                                                                              |
| Shock resistance                      | 15 gn for 11 ms conforming to IEC 60068-2-27                                                                                                                                                                                                                                                                                                                                                                                     |
| Operating position                    | Vertical +/- 10 degree                                                                                                                                                                                                                                                                                                                                                                                                           |
| Maximum THDI                          | <48 % full load conforming to IEC 61000-3-12                                                                                                                                                                                                                                                                                                                                                                                     |
| Electromagnetic compatibility         | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |
| Environmental characteristic          | Chemical pollution resistance class 3C3 conforming to EN/IEC 60721-3-3<br>Dust pollution resistance class 3S3 conforming to EN/IEC 60721-3-3                                                                                                                                                                                                                                                                                     |
| Pollution degree                      | 2 conforming to EN/IEC 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                 |
| Relative humidity                     | 5...95 % without condensation conforming to IEC 60068-2-3                                                                                                                                                                                                                                                                                                                                                                        |
| Ambient air temperature for operation | -15...40 °C (without)<br>40...50 °C (with derating factor)                                                                                                                                                                                                                                                                                                                                                                       |
| Ambient air temperature for storage   | -40...70 °C                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating altitude                    | <= 1000 m without<br>1000...4800 m with current derating 1 % per 100 m                                                                                                                                                                                                                                                                                                                                                           |
| Standards                             | UL 508C<br>EN/IEC 61800-3<br>Environment 1 category C2 EN/IEC 61800-3<br>Environment 2 category C3 EN/IEC 61800-3<br>EN/IEC 61800-5-1<br>IEC 61000-3-12<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1                                                                                                                                                                                                                               |
| Product certifications                | REACH<br>TÜV<br>UL<br>CSA                                                                                                                                                                                                                                                                                                                                                                                                        |
| Marking                               | CE                                                                                                                                                                                                                                                                                                                                                                                                                               |

## Offer Sustainability

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Sustainable offer status | Green Premium product                                      |
| REACH Regulation         | <a href="#">REACH Declaration</a>                          |
| EU RoHS Directive        | Pro-active compliance (Product out of EU RoHS legal scope) |

#### EU RoHS Declaration


|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

#### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

Front and Left View

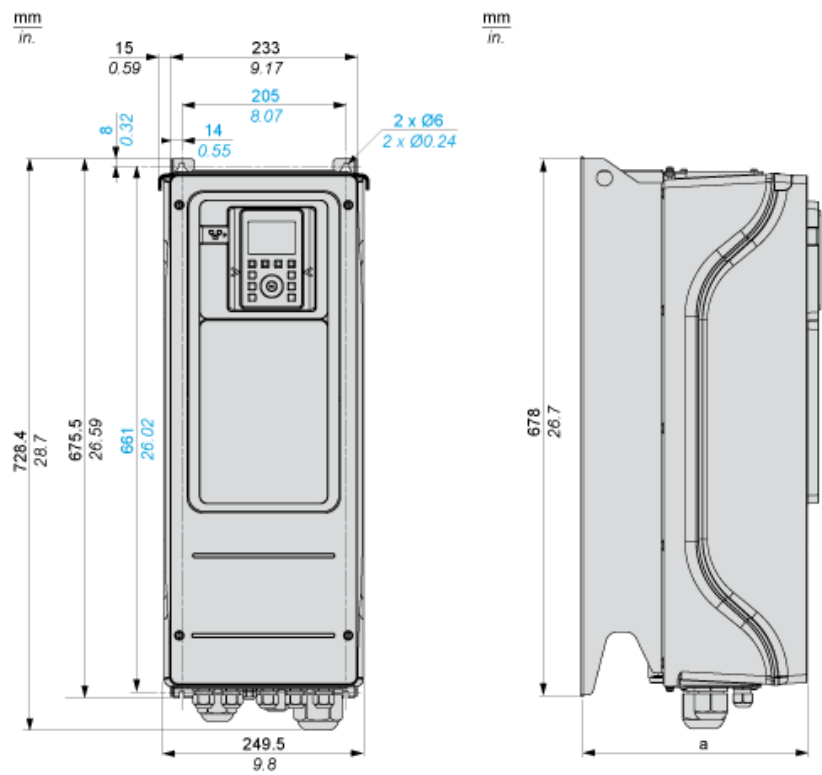

a = 272 mm (10.7 in.)

## Clearances

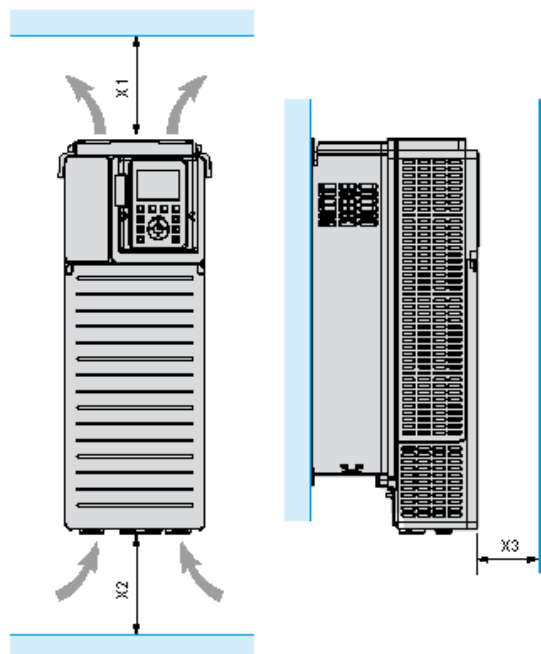


| X1                  | X2                  | X3                 |
|---------------------|---------------------|--------------------|
| ≥ 100 mm (3.94 in.) | ≥ 100 mm (3.94 in.) | ≥ 10 mm (0.39 in.) |

- Mount the device in a vertical position ( $\pm 10^\circ$ ). This is required for cooling the device.
- Do not mount the device close to heat sources.
- Leave sufficient free space so that the air required for cooling purposes can circulate from the bottom to the top of the drive.

## Three-Phase Power Supply with Upstream Breaking via Line Contactor


Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

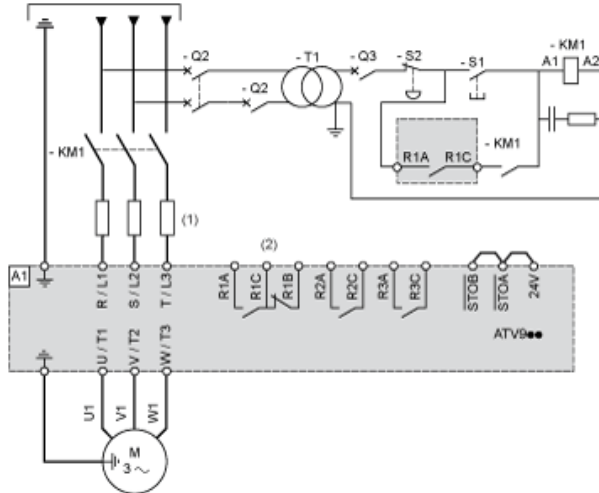

- (1) Line choke if used
- (2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.
- A1 : Drive
- KM1 : Line Contactor
- Q2, Q3 : Circuit breakers
- S1, S2 : Pushbuttons
- T1 : Transformer for control part


## Three-Phase Power Supply with Downstream Breaking via Contactor

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1

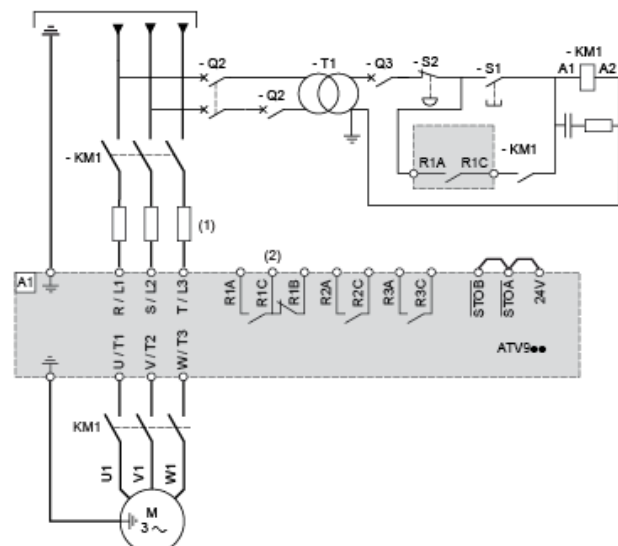


- (1) Line choke if used
- (2) Use relay R1 set to operating state Fault to switch Off the product once an error is detected.
- A1 : Drive
- KM1 : Contactor

## Control Block Wiring Diagram

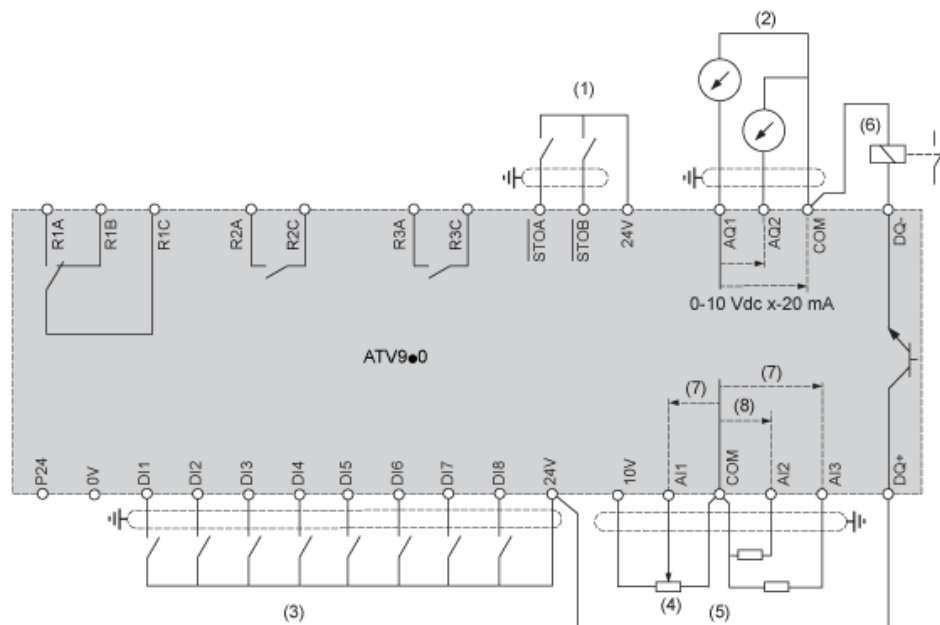

- (1) Safe Torque Off
  - (2) Analog Output
  - (3) Digital Input
  - (4) Reference potentiometer
  - (5) Analog Input
  - (6) Digital Output
  - (7) 0-10 Vdc, x-20 mA
  - (8) 0-10 Vdc, -10 Vdc...+10 Vdc
- R1A, R1B, R1C Relay
- R2A, R2C Sequence relay
- R3A, R3C Sequence relay

## Sensor Connection




It is possible to connect either 1 or 3 sensors on terminals AI1 or AI3

## Sink / Source Switch Configuration


The switch is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.

- Set the switch to Source (factory setting) if using PLC outputs with PNP transistors.
- Set the switch to Ext if using PLC outputs with NPN transistors.


### Switch Set to SRC (Source) Position Using the Output Power Supply for the Digital Inputs

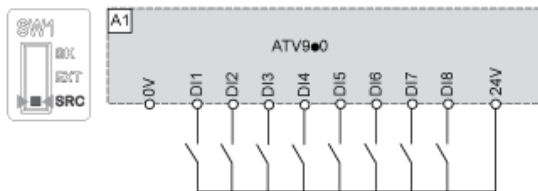


### Switch Set to SRC (Source) Position and Use of an External Power Supply for the DIs

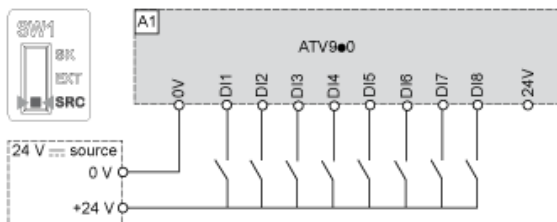

### Switch Set to SK (Sink) Position Using the Output Power Supply for the Digital Inputs

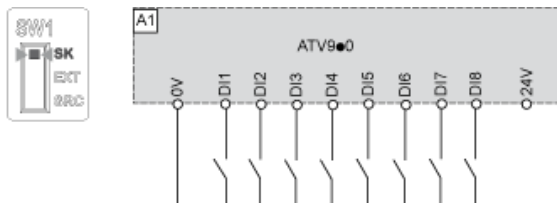

### Switch Set to EXT Position Using an External Power Supply for the DIs

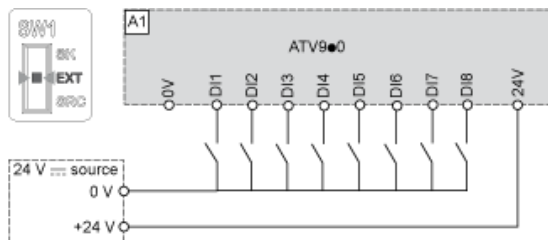

Derating Curves

